


THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY. COPYRIGHT 1965 BY DIGITAL EQUIPMENT CORPORATION

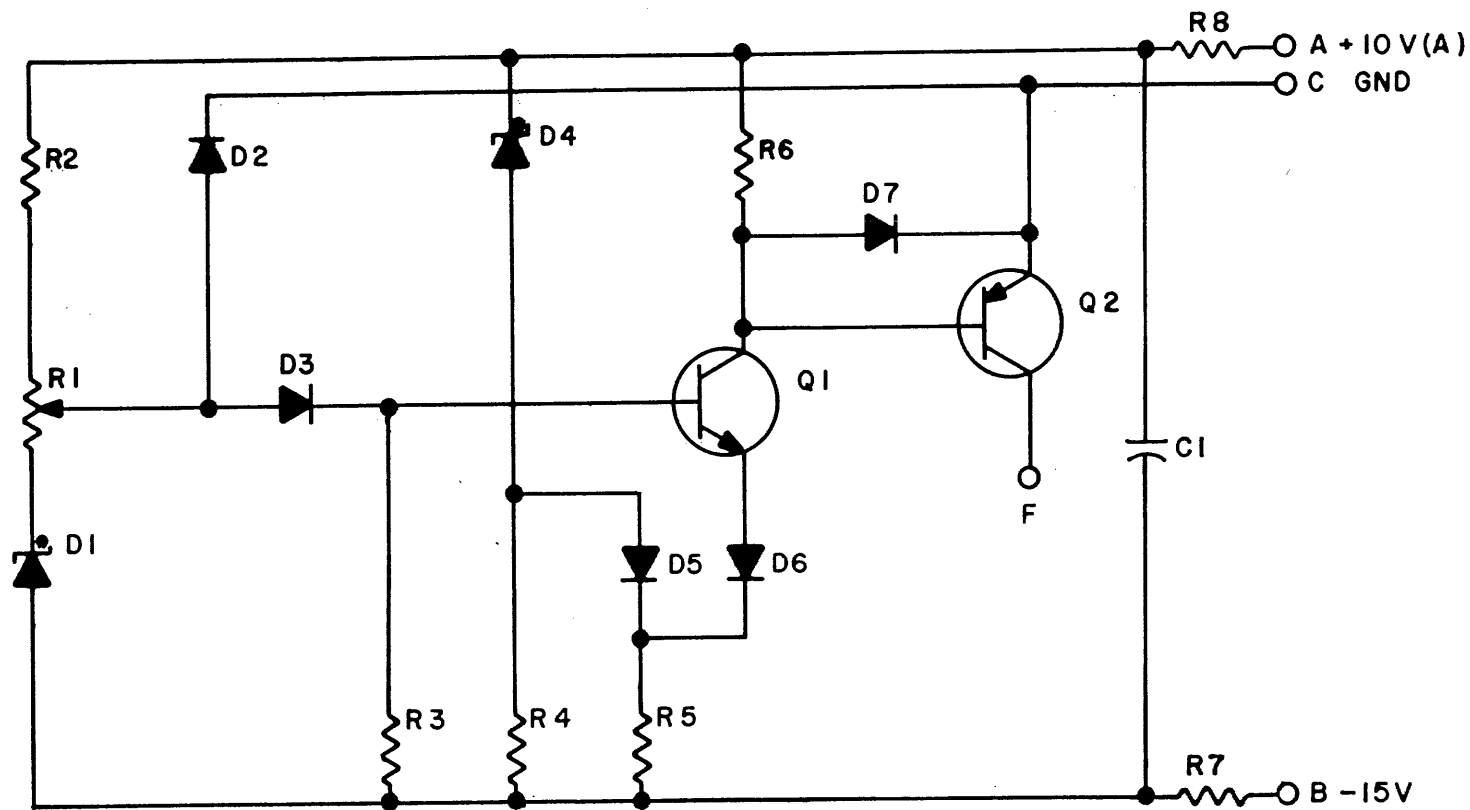

Q2	TRANSISTOR DEC2894-3B-S	1503099
Q1	TRANSISTOR DEC3009B	1503100
R7, R8	RES. 100 1/4W 5% CC	1300229
R6	RES. 3K 1/4W 5% CC	1300432
R5	RES. 1K 1/4W 5% CC	1300365
R4	RES. 6.8K 1/4W 10% CC	1300463
R3	RES. 68K 1/4W 10% CC	1300526
R2	RES. 3.9K 1/4W 5% CC	1300444
R1	RES. 5K PRINTED CKT. POT	1305451
D4	DIODE IN964A	1100127
D1	DIODE 1/4M 6.8 AZ5	1100102
D2, D3, D5, D6, D7	DIODE D664	1100114
C1	CAP. 0.1MFD 50V 20% D.CER.	1000030
PARTS LIST		A-PL-W505-0-0
REFERENCE DESIGNATION		DESCRIPTION
		PART NO.

REVISIONS	CHK CHG NO. REV.	DRN. I. HAHN	DATE 3-1-65	TRANSISTOR & DIODE CONVERSION CHART		digital EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS	TITLE LOW VOLTAGE DETECTOR W505		
	REV. 8 REDR 6571 A	CHK'D N. PERRYMAN	DATE 3-3-65	DEC	EIA		SIZE B	CODE CS	
	REV. 6571 A	ENG. N. BOISSE	DATE 3-3-65	D664	IN3806		NUMBER W505-0-1	REV. B	
	REV. 6571 A	PROD.	DATE	IN964A X	SAME				
				1/4M 6.8AZ5	IN4099				
				DEC2894-3B	SAME				
				DEC3009B	2N3009				