





RZ26L™ Disk Drive Data Sheet

EK-RZ26L-IS. A01

February, 1994

To install the RZ26L disk drive, refer to any section in your system documentation that explains how to install an RZ™-series hard disk drive. The installation procedure is the same for all RZ-series hard disk drives.

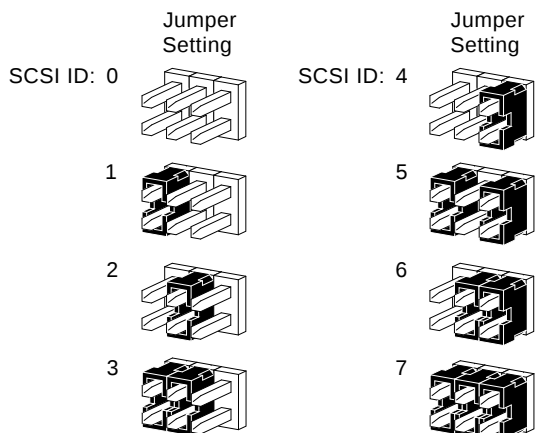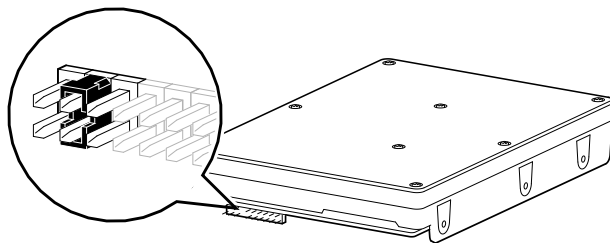

MLO-012101

Table 1 RZ26L Disk Drive Specifications

Weight	Height	Width	Depth
0.49 kg	2.54 cm	10.2 cm	14.6 cm
(1.08 lb)	(1.00 in)	(4.00 in)	(5.75 in)
Drive Formatted Storage Capacity			
Bytes per drive		1.05 GB (formatted)	
Bytes per surface		75 MB	
Bytes per track		29,640	
Buffer size		512 KB	
Drive Performance			
Data transfer rate to/from media		2.7-5.5 MB/sec	
Seek time track to track		1 msec	
Seek time average		9.5 msec	
Seek time maximum (full stroke)		≤ 20 msec	
Average latency		5.6 msec	
Rotational speed		5400 rpm	
Interleave ratio		1:1	
Drive Operating Conditions			
Ambient temperature		5°C to 55°C (41°F to 131°F)	
Relative humidity		10%–90% non-condensing	
Maximum wet bulb		32°C (90°F)	
Temperature gradient		20°C (36°F) per hour	
Drive Nonoperating Conditions			
Ambient temperature		–40°C to 66°C (–40°F to 151°F)	
Relative humidity		8%–95% (noncondensing)	
Maximum wet bulb		46°C (115°F)	
Temperature gradient		30°C (55°F) per hour	

© Digital Equipment Corporation 1994. All rights reserved.

S2461