


(ITEM 9) ARE INSTALLED IN THE MOUNTING SPACES.

OPTION	MIN. REV.
RA80-AA(-AD)	D
RA81-AA(-AD)	A
RL02-AK	J
RX02-BK(-BN)	J
TU58-E	F

11X44-FD	A1	WIDE BODY , 240V
----------	----	------------------

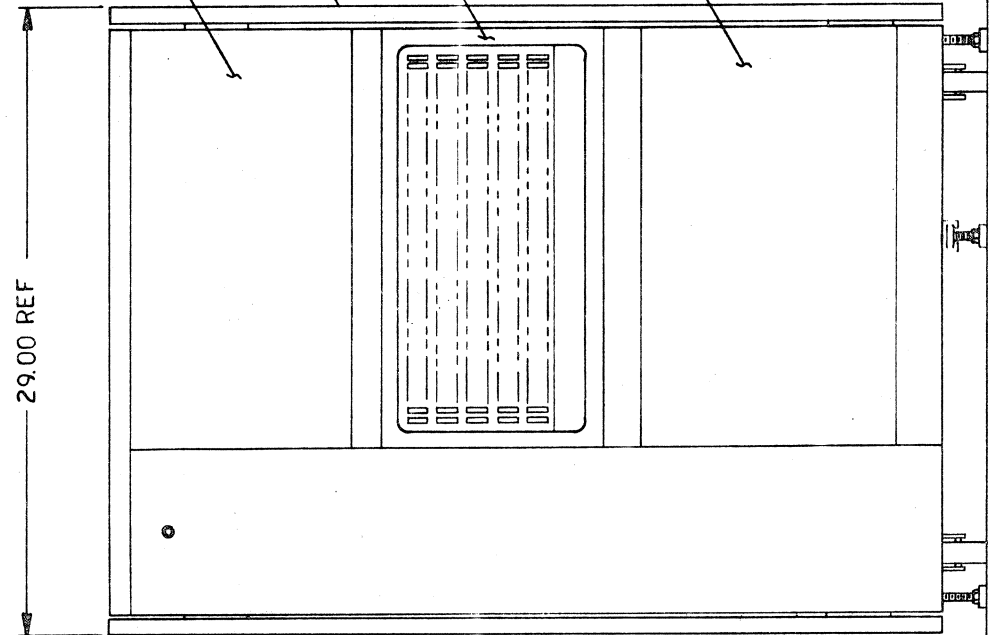

2

1

FRONT VIEW
VARIATIONS EC & ED




[illegible]

00001 00000

THIS DRAWING AND ITS SPECIFICATIONS, LEGEND, AND THE
BUILT NOT BE REPRODUCED OR COPIED ON ANY MEDIUM
OR IN ANY FORM WITHOUT THE WRITTEN PERMISSION
OF THE U.S. GOVERNMENT
1983 DOWRY EQUIPMENT CORPORATION

8 1 2 3 4 5 6 7 8

V 0-3-11X11 DUA

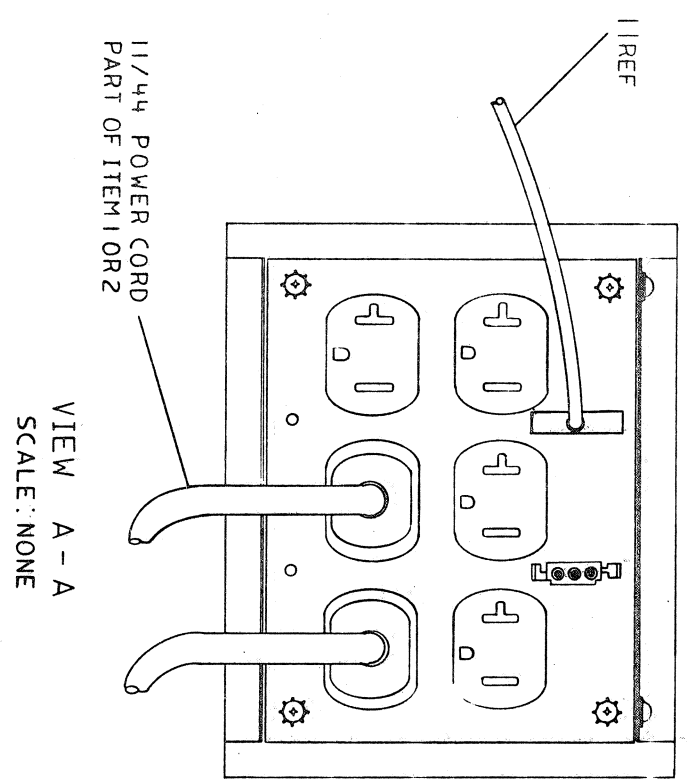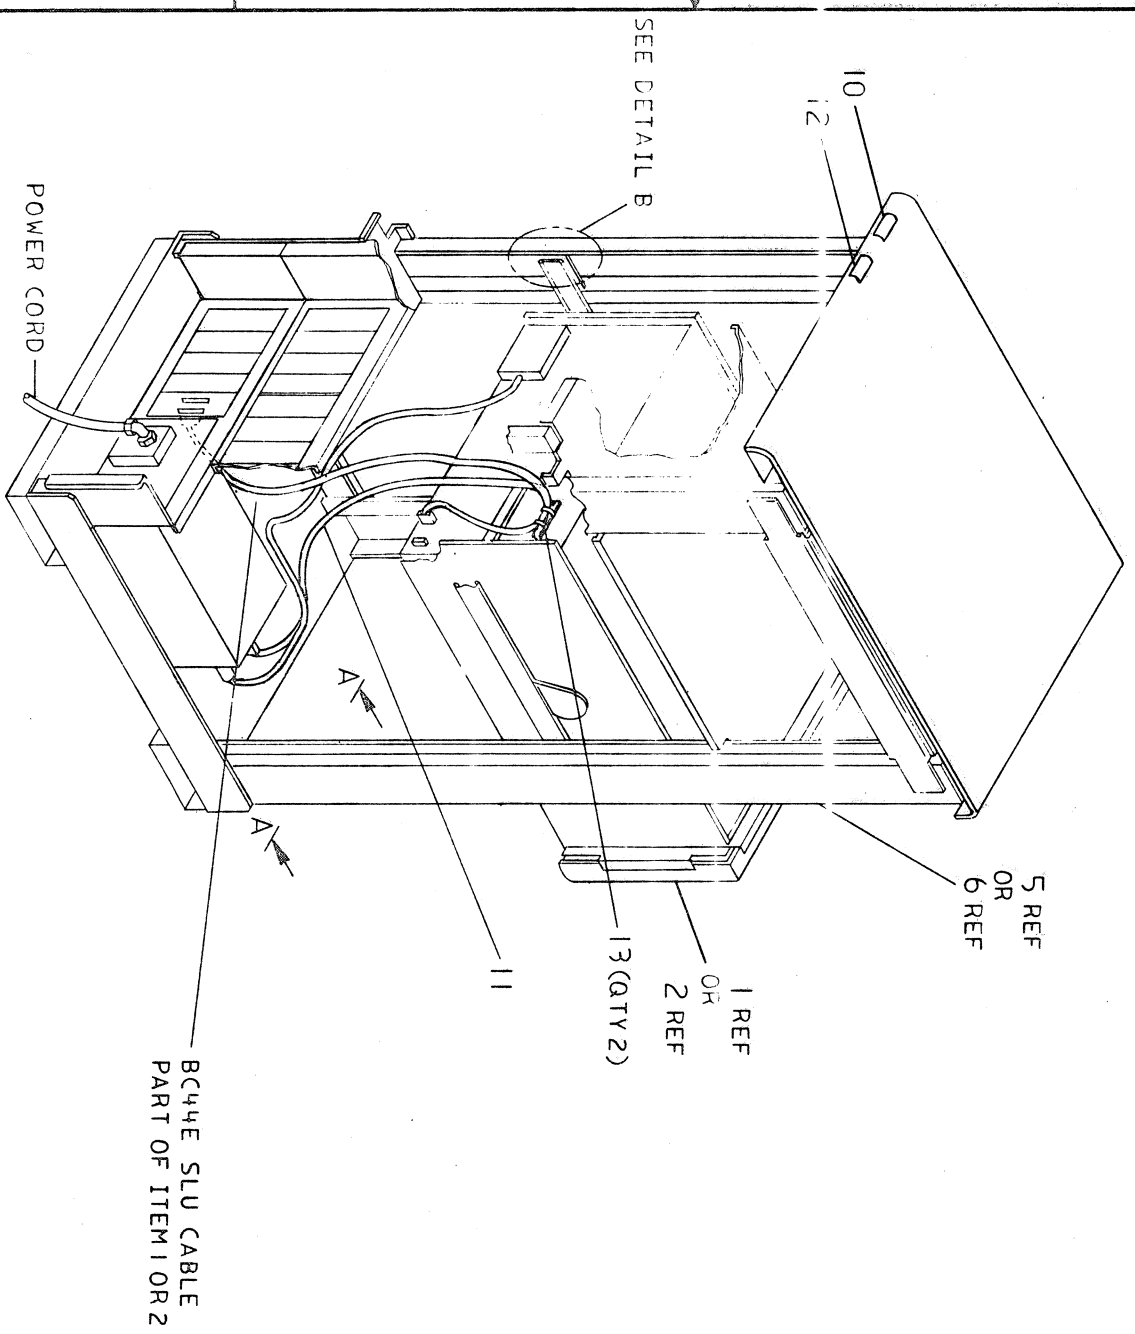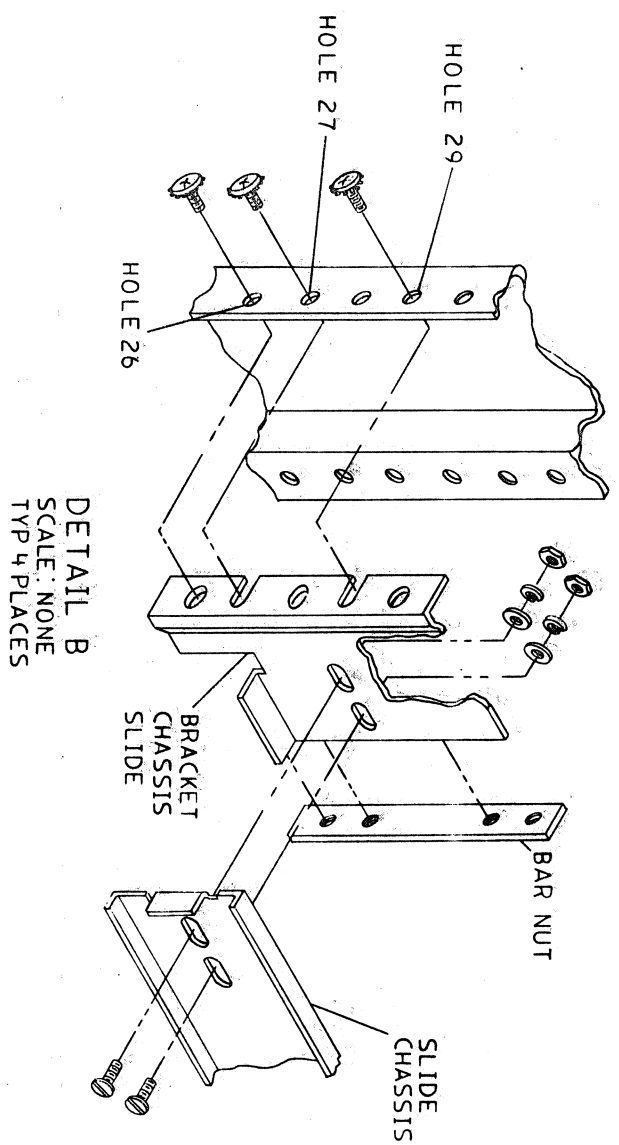

REVISION HISTORY		
DATE	ECO NUMBER	REV

TITLE
11/44 CPU
KERNEL, 11X44-F

DOCUMENT INFORMATION		
SIZE CODE	NUMBER	REV
DUA	11X44-F-0	A
SCALE		
NONE	SHEET 2	OF 3

SIZE CODE NUMBER REV
DUA 11X44-F-0 A

8

V 0-J-hh X 11 VUD

6

5

4

3

2

1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND ARE TO BE USED BY THE USER ONLY IN CONNECTION WITH THE EQUIPMENT SPECIFICALLY IDENTIFIED HEREON. NO PART OF THIS DRAWING OR SPECIFICATIONS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT WRITTEN PERMISSION OF DIGITAL EQUIPMENT CORPORATION. 1983 DIGITAL EQUIPMENT CORPORATION

12
10
7 REF
OR
8 REF

SEE NOTE 5

SEE NOTE 2

14
15
1 REF
OR
2 REF

13 (QTY 2)


SEE NOTE 4

SEE DETAIL B

11

SEE NOTE 3

SEE NOTE 3

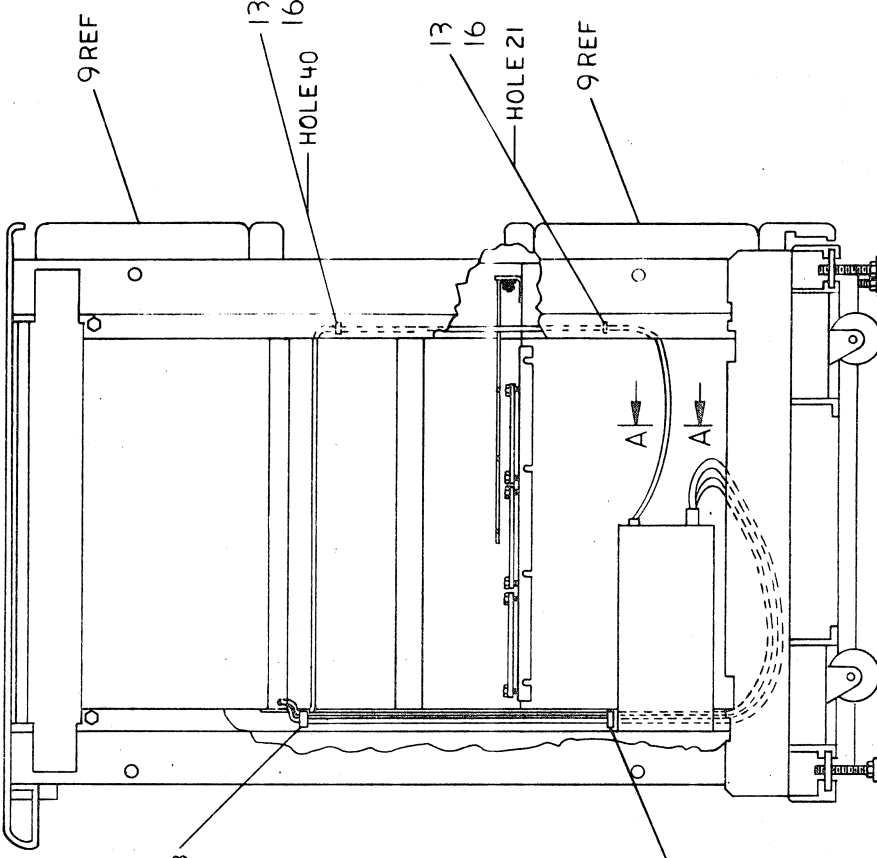

REAR VIEW

VARIATION FC & FD ONLY

LEFT SIDE VIEW

DATE	REVISION HISTORY	REV.
	ECO NUMBER	

END 177A

8

7

6

5

4

3

2

1

TITLE 11/44 CPU
KERNEL, 11/44-F

SIZE CODE
DUA 11X44-F-0

REV. A

SCALE NONE

SHEET 3 OF 3

1 MIL

DUA 11X44-F-0

REV. A

AUTOMATED BY PRLST.40(50)

PARTS LIST

SHEET A1 OF A1

LINE ITEM	DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QUANTITY PER VARIATION			
				FA	FB	FC	FD
1	E-UA-11/44-0-0	11/44-FX	KD11-Z,KK11-B,M9302,BA11-AA,BC44	1	-	1	-
2	E-UA-11/44-0-0	11/44-FY	KD11-Z,KK11-B,M9302,BA11-AB,BC44	-	1	-	1
3	K-PL-MS11-P-DBP	0MS11-PB	1MB ECC MOS RAM (M8743-BA,512K X	1	1	1	1
4	B-UA-BC22D-0-0	BC22D-25	25FT CABLE,ASYNC, NULL MODEM,6 WI	1	1	1	1
5	D-UA-7020753-0-0	7020753-01	SINGLE BAY SHIELDED CPU CABINET	-	-	-	-
6	D-UA-7020753-0-0	7020753-02	SINGLE BAY SHIELDED CPU CABINET	-	-	-	-
7	D-UA-7020754-0-0	7020754-01	WIDE BODY SHIELDED CPU CABINET	-	-	-	-
8	D-UA-7020754-0-0	7020754-02	WIDE BODY SHIELDED CPU CAB 240V	-	-	-	-
9	K-PL-H9504-U-0	H9504-UC	10 1/2" BLANK FRONT PANEL,68 GRE	1	1	1	1
10	A-PS-3617880-0-0	3617880-02	LABEL,FCC,CLASS A,PROCESSOR	1	1	1	1
11	A-PS-3617880-0-0	7008288-10	CABLE	1	1	1	1
12	C-IA-7008288-0-0	3617674-01	LABEL,SERIAL/POWER W UL 6 CSA	2	2	4	4
13	A-PS-3617674-0-0	9007032-00	TIE,CABLE BUNDL,DIA 0-1-3/4"=101	-	-	1	1
14	A-PA-3700436-0-0	9007089-00	CLAMP,CABLE,SCREW MTD. 3/4"	-	-	1	1
15	A-PA-3700436-0-0	9006565-00	NUT,HEX EXT TOOTH LOCKSHR 10-32	-	-	1	1
16	A-PA-3700436-0-0	9007867-00	MOUNT,PUSH,CABLE TIE	-	-	2	2
17	A-PA-3700436-0-0	3700436-06	CAB H9645 REPLACES VAR. 03	-	-	1	1
18	A-PA-3700436-0-0	3700436-10	PKG. CAB H9642/H9645/H9646	1	1	-	-

REVISION HISTORY		BASIC PART NO: 11X44		DRN: L BOURGAULT		DATE: 05-JUL-83		D I G I T A L	
ENG	ECO NUMBER	REV	SECTION A OF A	CHK'D:	D HEALY	DATE:	13-SEP-83	TITLE PARTS LIST	
	INITIAL	A	SECTION VARIATION INDEX					11/44 CPU KERNEL, 11X44-F	
			[A] FA,FB,FC,FD						
			[B]	DES.ENG.:	R LEWIS	DATE:	13-SEP-83		
			[C]	RESP.ENG.:	R LEWIS	DATE:	13-SEP-83		
			[D]						
			[E]	MFG.ENG.:	R. SMITH	DATE:	13-SEP-83		
			[F]	ASSEMBLY NUMBER:		TOP DOCUMENT NUMBER:			
				D-UA-11X44-F-0		#B-DD-11X44-F			
				SIZE CODE:	NUMBER	FILE NAME:	EDIT #		
					PL	11X44-F-DBP	A		
						27537A.PLS	15		

"THIS DRAWING AND SPECIFICATIONS HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT (C) 1983. DIGITAL EQUIPMENT CORPORATION"

8 7 6 5 4 3 2 1


THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION. COPYRIGHT 1983 DIGITAL EQUIPMENT CORPORATION

V 0-0-0-557020/

NUMBER	REV	VARIATION
7020753-01	AI	877-D (120V, 24A) PWR CONT
7020753-02	AI	877-B (240V, 12A) PWR CONT

LEGEND

- NOTES:
- FOR DETAILED INSTALLATION INSTRUCTIONS OF THE H9544 KITS REFER TO THEIR INDIVIDUAL ASSEMBLY DRAWINGS REFERENCED ON K-PL-7020753-0-DBP.
 - ITEM 19 ONLY REQUIRED WHEN A RL02 IS INSTALLED IN THE CABINET.

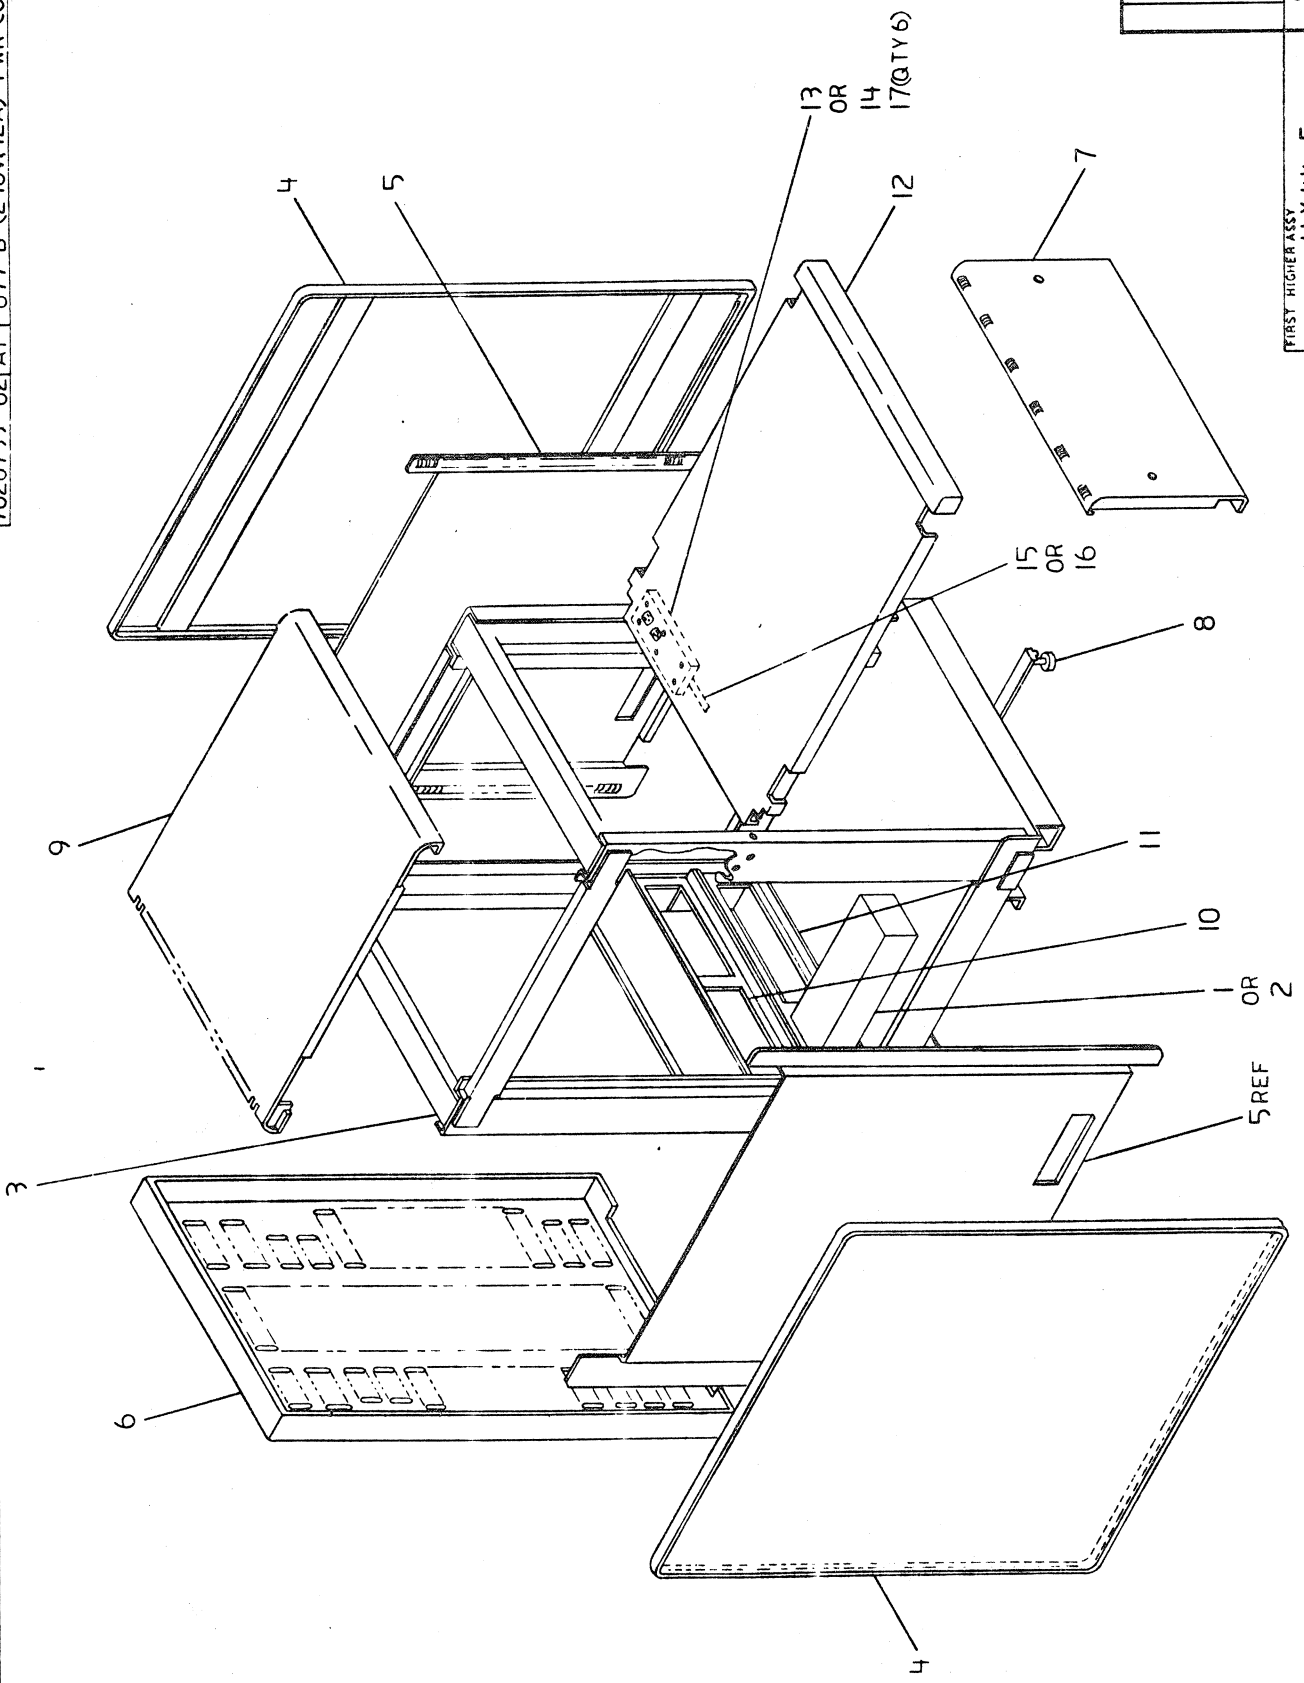

CAUTION: OFF SHEET PARTS LIST EXISTS
SEE K-PL-7020753-0-DBP
Z 6711

REV	DATE	ECO NUMBER	INITIAL
A			

DESCRIPTION	DRAWING NO.	PART NO.	ITEM NO.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND THE FOLLOWING TOLERANCES APPLY (PER DEC STD 114)			
INCHES TOLERANCES	ANGLES	APPLICABLE DIMENSION	DIMENSION RANGE IN INCHES
.X + .1 X1 + .00	TO 30°	TO 12.0	TO 12.0
X2 + .00	TO 45°	TO 12.0	TO 12.0
X3 + .00	TO 60°	TO 12.0	TO 12.0
X4 + .00	TO 75°	TO 12.0	TO 12.0
X5 + .00	TO 90°	TO 12.0	TO 12.0
X6 + .00	TO 105°	TO 12.0	TO 12.0
X7 + .00	TO 120°	TO 12.0	TO 12.0
X8 + .00	TO 135°	TO 12.0	TO 12.0
X9 + .00	TO 150°	TO 12.0	TO 12.0
X10 + .00	TO 165°	TO 12.0	TO 12.0
X11 + .00	TO 180°	TO 12.0	TO 12.0
X12 + .00	TO 195°	TO 12.0	TO 12.0
X13 + .00	TO 210°	TO 12.0	TO 12.0
X14 + .00	TO 225°	TO 12.0	TO 12.0
X15 + .00	TO 240°	TO 12.0	TO 12.0
X16 + .00	TO 255°	TO 12.0	TO 12.0
X17 + .00	TO 270°	TO 12.0	TO 12.0
X18 + .00	TO 285°	TO 12.0	TO 12.0
X19 + .00	TO 300°	TO 12.0	TO 12.0
X20 + .00	TO 315°	TO 12.0	TO 12.0
X21 + .00	TO 330°	TO 12.0	TO 12.0
X22 + .00	TO 345°	TO 12.0	TO 12.0
X23 + .00	TO 360°	TO 12.0	TO 12.0
X24 + .00	TO 375°	TO 12.0	TO 12.0
X25 + .00	TO 390°	TO 12.0	TO 12.0
X26 + .00	TO 405°	TO 12.0	TO 12.0
X27 + .00	TO 420°	TO 12.0	TO 12.0
X28 + .00	TO 435°	TO 12.0	TO 12.0
X29 + .00	TO 450°	TO 12.0	TO 12.0
X30 + .00	TO 465°	TO 12.0	TO 12.0
X31 + .00	TO 480°	TO 12.0	TO 12.0
X32 + .00	TO 495°	TO 12.0	TO 12.0
X33 + .00	TO 510°	TO 12.0	TO 12.0
X34 + .00	TO 525°	TO 12.0	TO 12.0
X35 + .00	TO 540°	TO 12.0	TO 12.0
X36 + .00	TO 555°	TO 12.0	TO 12.0
X37 + .00	TO 570°	TO 12.0	TO 12.0
X38 + .00	TO 585°	TO 12.0	TO 12.0
X39 + .00	TO 600°	TO 12.0	TO 12.0
X40 + .00	TO 615°	TO 12.0	TO 12.0
X41 + .00	TO 630°	TO 12.0	TO 12.0
X42 + .00	TO 645°	TO 12.0	TO 12.0
X43 + .00	TO 660°	TO 12.0	TO 12.0
X44 + .00	TO 675°	TO 12.0	TO 12.0
X45 + .00	TO 690°	TO 12.0	TO 12.0
X46 + .00	TO 705°	TO 12.0	TO 12.0
X47 + .00	TO 720°	TO 12.0	TO 12.0
X48 + .00	TO 735°	TO 12.0	TO 12.0
X49 + .00	TO 750°	TO 12.0	TO 12.0
X50 + .00	TO 765°	TO 12.0	TO 12.0
X51 + .00	TO 780°	TO 12.0	TO 12.0
X52 + .00	TO 795°	TO 12.0	TO 12.0
X53 + .00	TO 810°	TO 12.0	TO 12.0
X54 + .00	TO 825°	TO 12.0	TO 12.0
X55 + .00	TO 840°	TO 12.0	TO 12.0
X56 + .00	TO 855°	TO 12.0	TO 12.0
X57 + .00	TO 870°	TO 12.0	TO 12.0
X58 + .00	TO 885°	TO 12.0	TO 12.0
X59 + .00	TO 900°	TO 12.0	TO 12.0
X60 + .00	TO 915°	TO 12.0	TO 12.0
X61 + .00	TO 930°	TO 12.0	TO 12.0
X62 + .00	TO 945°	TO 12.0	TO 12.0
X63 + .00	TO 960°	TO 12.0	TO 12.0
X64 + .00	TO 975°	TO 12.0	TO 12.0
X65 + .00	TO 990°	TO 12.0	TO 12.0
X66 + .00	TO 1005°	TO 12.0	TO 12.0
X67 + .00	TO 1020°	TO 12.0	TO 12.0
X68 + .00	TO 1035°	TO 12.0	TO 12.0
X69 + .00	TO 1050°	TO 12.0	TO 12.0
X70 + .00	TO 1065°	TO 12.0	TO 12.0
X71 + .00	TO 1080°	TO 12.0	TO 12.0
X72 + .00	TO 1095°	TO 12.0	TO 12.0
X73 + .00	TO 1110°	TO 12.0	TO 12.0
X74 + .00	TO 1125°	TO 12.0	TO 12.0
X75 + .00	TO 1140°	TO 12.0	TO 12.0
X76 + .00	TO 1155°	TO 12.0	TO 12.0
X77 + .00	TO 1170°	TO 12.0	TO 12.0
X78 + .00	TO 1185°	TO 12.0	TO 12.0
X79 + .00	TO 1200°	TO 12.0	TO 12.0
X80 + .00	TO 1215°	TO 12.0	TO 12.0
X81 + .00	TO 1230°	TO 12.0	TO 12.0
X82 + .00	TO 1245°	TO 12.0	TO 12.0
X83 + .00	TO 1260°	TO 12.0	TO 12.0
X84 + .00	TO 1275°	TO 12.0	TO 12.0
X85 + .00	TO 1290°	TO 12.0	TO 12.0
X86 + .00	TO 1305°	TO 12.0	TO 12.0
X87 + .00	TO 1320°	TO 12.0	TO 12.0
X88 + .00	TO 1335°	TO 12.0	TO 12.0
X89 + .00	TO 1350°	TO 12.0	TO 12.0
X90 + .00	TO 1365°	TO 12.0	TO 12.0
X91 + .00	TO 1380°	TO 12.0	TO 12.0
X92 + .00	TO 1395°	TO 12.0	TO 12.0
X93 + .00	TO 1410°	TO 12.0	TO 12.0
X94 + .00	TO 1425°	TO 12.0	TO 12.0
X95 + .00	TO 1440°	TO 12.0	TO 12.0
X96 + .00	TO 1455°	TO 12.0	TO 12.0
X97 + .00	TO 1470°	TO 12.0	TO 12.0
X98 + .00	TO 1485°	TO 12.0	TO 12.0
X99 + .00	TO 1500°	TO 12.0	TO 12.0
X100 + .00	TO 1515°	TO 12.0	TO 12.0
X101 + .00	TO 1530°	TO 12.0	TO 12.0
X102 + .00	TO 1545°	TO 12.0	TO 12.0
X103 + .00	TO 1560°	TO 12.0	TO 12.0
X104 + .00	TO 1575°	TO 12.0	TO 12.0
X105 + .00	TO 1590°	TO 12.0	TO 12.0
X106 + .00	TO 1605°	TO 12.0	TO 12.0
X107 + .00	TO 1620°	TO 12.0	TO 12.0
X108 + .00	TO 1635°	TO 12.0	TO 12.0
X109 + .00	TO 1650°	TO 12.0	TO 12.0
X110 + .00	TO 1665°	TO 12.0	TO 12.0
X111 + .00	TO 1680°	TO 12.0	TO 12.0
X112 + .00	TO 1695°	TO 12.0	TO 12.0
X113 + .00	TO 1710°	TO 12.0	TO 12.0
X114 + .00	TO 1725°	TO 12.0	TO 12.0
X115 + .00	TO 1740°	TO 12.0	TO 12.0
X116 + .00	TO 1755°	TO 12.0	TO 12.0
X117 + .00	TO 1770°	TO 12.0	TO 12.0
X118 + .00	TO 1785°	TO 12.0	TO 12.0
X119 + .00	TO 1800°	TO 12.0	TO 12.0
X120 + .00	TO 1815°	TO 12.0	TO 12.0
X121 + .00	TO 1830°	TO 12.0	TO 12.0
X122 + .00	TO 1845°	TO 12.0	TO 12.0
X123 + .00	TO 1860°	TO 12.0	TO 12.0
X124 + .00	TO 1875°	TO 12.0	TO 12.0
X125 + .00	TO 1890°	TO 12.0	TO 12.0
X126 + .00	TO 1905°	TO 12.0	TO 12.0
X127 + .00	TO 1920°	TO 12.0	TO 12.0
X128 + .00	TO 1935°	TO 12.0	TO 12.0
X129 + .00	TO 1950°	TO 12.0	TO 12.0
X130 + .00	TO 1965°	TO 12.0	TO 12.0
X131 + .00	TO 1980°	TO 12.0	TO 12.0
X132 + .00	TO 1995°	TO 12.0	TO 12.0
X133 + .00	TO 2010°	TO 12.0	TO 12.0
X134 + .00	TO 2025°	TO 12.0	TO 12.0
X135 + .00	TO 2040°	TO 12.0	TO 12.0
X136 + .00	TO 2055°	TO 12.0	TO 12.0
X137 + .00	TO 2070°	TO 12.0	TO 12.0
X138 + .00	TO 2085°	TO 12.0	TO 12.0
X139 + .00	TO 2100°	TO 12.0	TO 12.0
X140 + .00	TO 2115°	TO 12.0	TO 12.0
X141 + .00	TO 2130°	TO 12.0	TO 12.0
X142 + .00	TO 2145°	TO 12.0	TO 12.0
X143 + .00	TO 2160°	TO 12.0	TO 12.0
X144 + .00	TO 2175°	TO 12.0	TO 12.0
X145 + .00	TO 2190°	TO 12.0	TO 12.0
X146 + .00	TO 2205°	TO 12.0	TO 12.0
X147 + .00	TO 2220°	TO 12.0	TO 12.0
X148 + .00	TO 2235°	TO 12.0	TO 12.0
X149 + .00	TO 2250°	TO 12.0	TO 12.0
X150 + .00	TO 2265°	TO 12.0	TO 12.0
X151 + .00	TO 2280°	TO 12.0	TO 12.0
X152 + .00	TO 2295°	TO 12.0	TO 12.0
X153 + .00	TO 2310°	TO 12.0	TO 12.0
X154 + .00	TO 2325°	TO 12.0	TO 12.0
X155 + .00	TO 2340°	TO 12.0	TO 12.0
X156 + .00	TO 2355°	TO 12.0	TO 12.0
X157 + .00	TO 2370°	TO 12.0	TO 12.0
X158 + .00	TO 2385°	TO 12.0	TO 12.0
X159 + .00	TO 2400°	TO 12.0	TO 12.0
X160 + .00	TO 2415°	TO 12.0	TO 12.0
X161 + .00	TO 2430°	TO 12.0	TO 12.0
X162 + .00	TO 2445°	TO 12.0	TO 12.0
X163 + .00	TO 2460°	TO 12.0	TO 12.0
X164 + .00	TO 2475°	TO 12.0	TO 12.0
X165 + .00	TO 2490°	TO 12.0	TO 12.0
X166 + .00	TO 2505°	TO 12.0	TO 12.0
X167 + .00	TO 2520°	TO 12.0	TO 12.0
X168 + .00	TO 2535°	TO 12.0	TO 12.0
X169 + .00	TO 2550°	TO 12.0	TO 12.0
X170 + .00	TO 2565°	TO 12.0	TO 12.0
X171 + .00	TO 2580°	TO 12.0	TO 12.0
X172 + .00	TO 2595°	TO 12.0	TO 12.0
X173 + .00	TO 2610°	TO 12.0	TO 12.0
X174 + .00	TO 2625°	TO 12.0	TO 12.0
X175 + .00	TO 2640°	TO 12.0	TO 12.0
X176 + .00	TO 2655°	TO 12.0	TO 12.0
X177 + .00	TO 2670°	TO 12.0	TO 12.0
X178 + .00	TO 2685°	TO 12.0	TO 12.0
X179 + .00	TO 2700°	TO 12.0	TO 12.0
X180 + .00	TO 2715°	TO 12.0	TO 12.0
X181 + .00	TO 2730°	TO 12.0	TO 12.0
X182 + .00	TO 2745°	TO 12.0	TO 12.0
X183 + .00	TO 2760°	TO 12.0	TO 12.0
X184 + .00	TO 2775°	TO 12.0	TO 12.0
X185 + .00	TO 2790°	TO 12.0	TO 12.0
X186 + .00	TO 2805°	TO 12.0	TO 12.0
X187 + .00	TO 2820°	TO 12.0	TO 12.0
X188 + .00	TO 2835°	TO 12.0	TO 12.0
X189 + .00	TO 2850°	TO 12.0	TO 12.0
X190 + .00	TO 2865°	TO 12.0	TO 12.0
X191 + .00	TO 2880°	TO 12.0	TO 12.0
X192 + .00	TO 2895°	TO 12.0	TO 12.0
X193 + .00	TO 2910°	TO 12.0	TO 12.0
X194 + .00	TO 2925°	TO 12.0	TO 12.0
X195 + .00	TO 2940°	TO 12.0	TO 12.0
X196 + .00	TO 2955°	TO 12.0	TO 12.0
X197 + .00	TO 2970°	TO 12.0	TO 12.0
X198 + .00	TO 2985°	TO 12.0	TO 12.0
X199 + .00	TO 3000°	TO 12.0	TO 12.0
X200 + .00	TO 3015°	TO 12.0	TO 12.0
X201 + .00	TO 3030°	TO 12.0	TO 12.0
X202 + .00	TO 3045°	TO 12.0	TO 12.0
X203 + .00	TO 3060°	TO 12.0	TO 12.0
X204 + .00	TO 3075°	TO 12.0	TO 12.0
X205 + .00	TO 3090°	TO 12.0	TO 12.0
X206 + .00	TO 3105°	TO 12.0	TO 12.0
X207 + .00	TO 3120°	TO 12.0	TO 12.0
X208 + .00	TO 3135°	TO 12.0	TO 12.0
X209 + .00	TO 3150°	TO 12.0	TO 12.0
X210 + .00	TO 3165°	TO 12.0	TO 12.0
X211 + .00	TO 3180°	TO 12.0	TO 12.0
X212 + .00	TO 3195°	TO 12.0	TO 12.0
X213 + .00	TO 3210°	TO 12.0	TO 12.0
X214 + .00	TO 3225°	TO 12.0	TO 12.0
X215 + .00	TO 3240°	TO 12.0	TO 12.0
X216 + .00	TO 3255°	TO 12.0	TO 12.0
X217 + .00	TO 3270°	TO 12.0	TO 12.0
X218 + .00	TO 3285°	TO 12.0	TO 12.0
X219 + .00	TO 3300°	TO 12.0	TO 12.0
X220 + .00	TO 3315°	TO 12.0	TO 12.0
X221 + .00	TO 3330°	TO 12.0	TO 12.0
X222 + .00	TO 3345°	TO 12.0	TO 12.0
X223 + .00	TO 3360°	TO 12.0	TO 12.0
X224 + .00	TO 3375°	TO 12.0	TO 12.0
X225 + .00	TO 3390°	TO 12.0	TO 12.0
X226 + .00	TO 3405°	TO 12.0	TO 12.0
X227 + .00	TO 3420°	TO 12.0	TO 12.0
X228 + .00	TO 3435°	TO 12.0	TO 12.0
X229 + .00	TO 3450°	TO 12.0	TO 12.0
X230 + .00	TO 3465°	TO 12.0	TO 12.0
X231 + .00	TO 3480°	TO 12.0	TO 12.0
X232 + .00	TO 3495°	TO 12.0	TO 12.0
X233 + .00	TO 3510°	TO 12.0	TO 12.0
X234 + .00	TO 3525°	TO 12.0	

THE DRAWING AND SPECIFICATIONS HEREBY ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND ARE TO BE USED ONLY FOR THE PROJECT AND FOR THE EQUIPMENT SPECIFICALLY IDENTIFIED THEREON. NO PART OF THIS DRAWING OR SPECIFICATIONS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT WRITTEN PERMISSION OF DIGITAL EQUIPMENT CORPORATION.

8

V

0-0-45/0201/VU/D

6




5

4


3

2

1

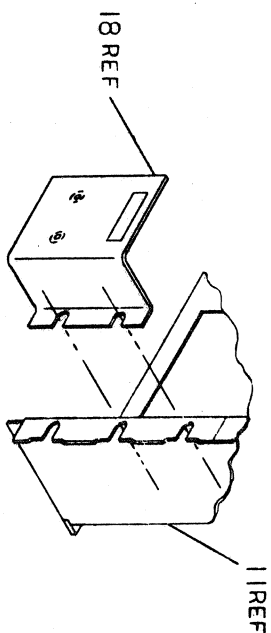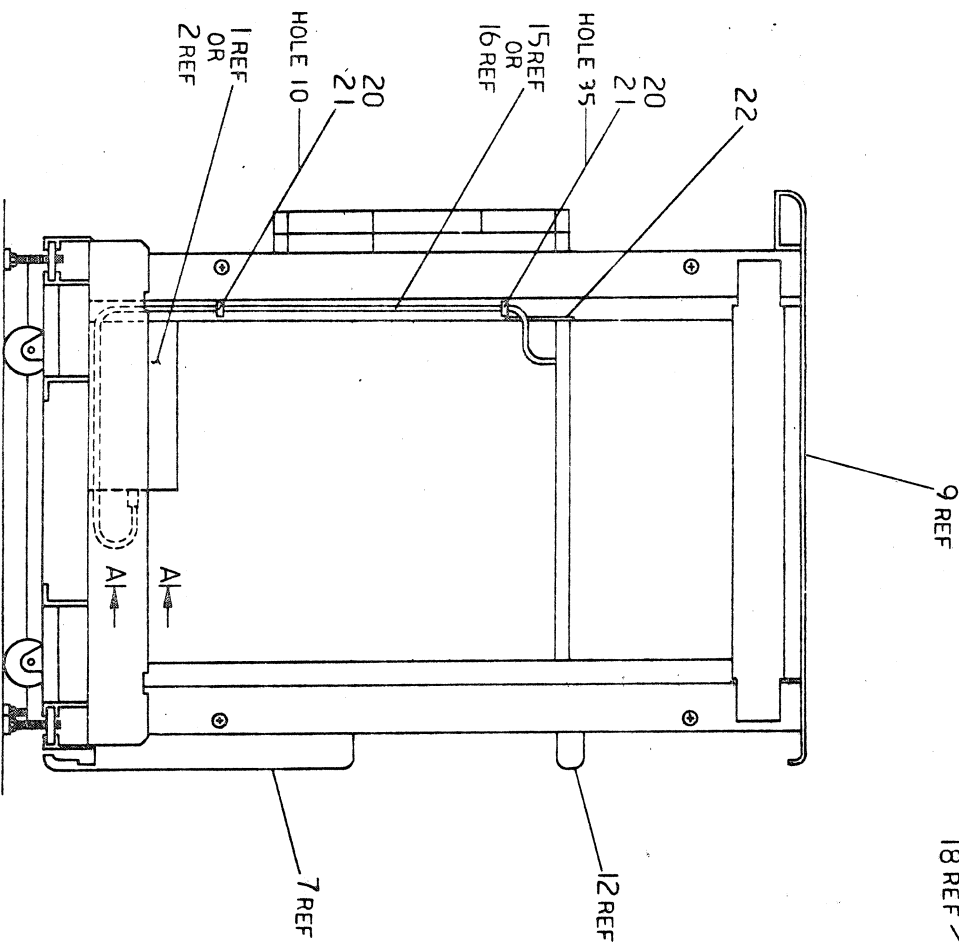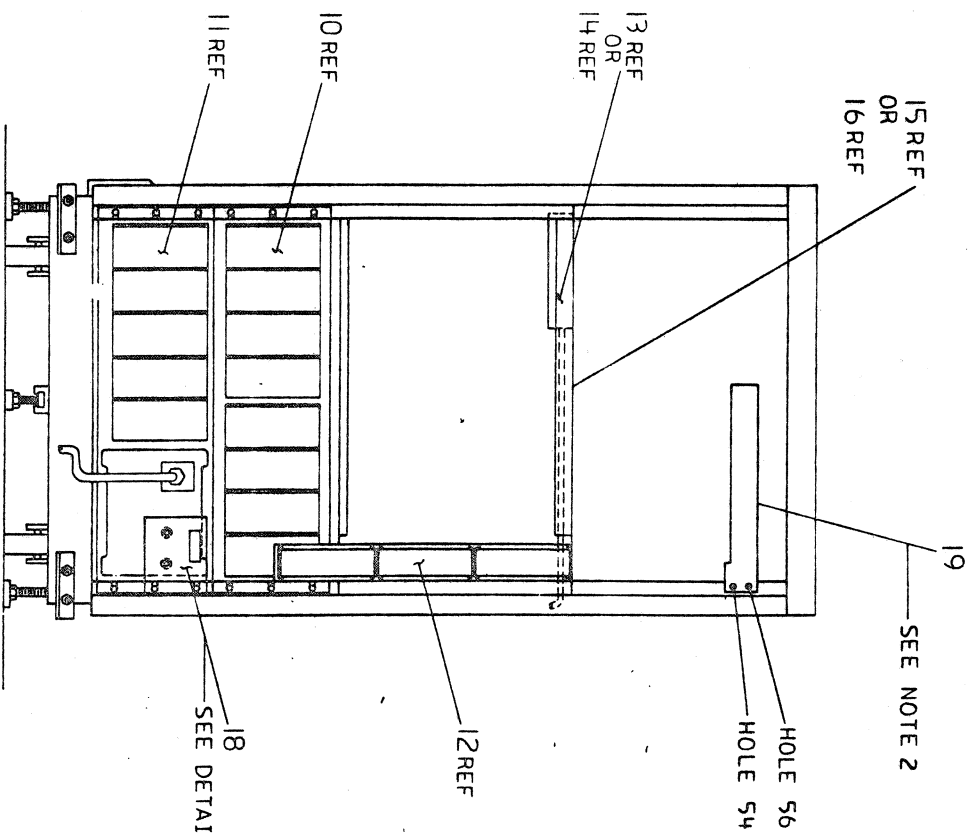

DETAIL B
SCALE: NONE

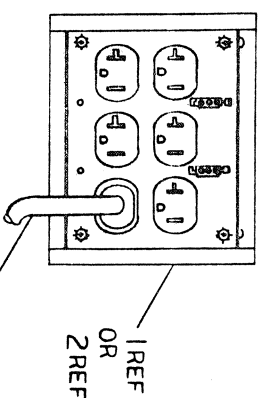

VIEW A-A
SCALE: NONE

REVISION HISTORY		
DATE	ECO NUMBER	REV

PRO 12A

8

7

6

5

4

3

2

1

TITLE
SINGLE BAY SHIELDED
CPU CABINET

DOCUMENT NUMBER		
SIZE CODE	NUMBER	REV
DUA	7020753 - 0 - 0	A
SCALE NONE	SHEET 2 OF 2	

DUA 7020753-0-0

QUANTITY PER VARIATION
01 02

PARTS LIST

NHHA13AUTOMATED BY PRTLST.40(50)

LINE ITEM	DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QUANTITY PER VARIATION
1	E-UA-877-0-DBU	00877-B	240V 12A FILTERED POWER CTL, 4 SW	1
2	E-UA-877-0-DBU	00877-D	120V 2A FILTERED POWER CTL, 4 SW	1
3	E-UA-H9542-F-0	H9542-FD	40" FRONT LOADING CAB FRAME (H95	1
4	E-UA-H9544-A-0	H9544-AA	40" END PANEL, GREY FRAME, BROWN I	2
5	E-UA-H9544-A-0	H9544-AE	SHIELDING INSERT, 40" END PANEL	1
6	E-UA-H9544-B-DBU	H9544-BF	SHIELDED REAR DOOR, 40" SINGLE WI	1
7	E-UA-H9544-E-0	H9544-EM	SHIELDED SHORT FRONT DOOR, 18.25"	1
8	E-UA-H9544-H-0	H9544-HC	KIT OF 1 STABILIZER LEG WITH LEV	1
9	E-UA-H9544-L-0	H9544-LG	SHIELDED TOP COVER, 40" SINGLE WI	1
10	E-AR-H9544-SB-DBU	H9544-SB	SHIELDED ADD-ON BULKHEAD, 5.25", R	1
11	E-AR-H9544-SK-DBU	H9544-SK	PRIMARY BULKHEAD PANEL W 877 POW	1
12	E-AR-H9544-SM-DBU	H9544-SM	SHIELDING PARTITION KIT FOR H964	1
13		1221374-03	FILTER, EMI/RFI 120/240 LINE INTE	1
14		1221374-04	FILTER, EMI/RFI 120/240 LINE INTE	1
15		1700083-01	PWR CORD, TERM 3-14 SJT 250	1
16		1700083-02	PWR CORD, TERM 3-14 SJT 125	1
17		9009988-11	SCREW, SEMS HEX SLOT 6-	6
18	C-IA-7428849-0-0	7428849-01	BRACKET, DNA	1
19	D-UA-H026-0-0	OH026-00	CABLE RETRACTOR FOR RL01, RL02	1
20		9007867-00	MOUNT, PUSH, CABLE TIE	1
21		9007032-00	TIE, CABLE BUNDL. DIA 0-1-3/4"=101	2
22		9009718-04	GROMMET, STRIP STYRENE	1

23 NOTE: ITEM 19 ONLY REQUIRED WHEN A RL02 IS INSTALLED IN THE CABINET.

REVISION HISTORY	BASIC PART NO: 7020753	DRN:	R STREEPER	DATE: 17-JUN-83	D	I	G	I	T	A	L
ENG: ECO NUMBER	REV	SECTION A OF A			PARTS LIST						
INITIAL	A	SECTION. VARIATION INDEX: CHK'D:	D. HEALY	DATE: 04-AUG-83	SINGLE BAY SHIELDED CPU CABINET						
		[A] 01.02									
		[B]	DES. ENG.: R LEWIS	DATE: 04-AUG-83	DOCUMENT NUMBER						
		[C]	RESP. ENG.: R LEWIS	DATE: 04-AUG-83	SIZE: CODE: NUMBER REV						
		[D]									
		[E]	MFG. ENG.: R SMITH	DATE: 04-AUG-83	K	PL	7020753-0-DBP A				
		[F]	ASSEMBLY NUMBER:	TOP DOCUMENT NUMBER:	FILE NAME: EDIT #:						
			D-UA-7020753-0-0	#8-DD-7020753-0	Z6711A.PLS 11						
"THIS DRAWING AND SPECIFICATIONS HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT (C) 1983. DIGITAL EQUIPMENT CORPORATION"											
CHK	HH	+3									

THIS DRAWING AND SPECIFICATION, HEREIN, ARE THE PROPERTY OF THE UNITED STATES GOVERNMENT. IT IS TO BE USED FOR THE DESIGN, CONSTRUCTION, OR REPAIR OF A PRODUCT OR PROCESS. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM THE UNITED STATES GOVERNMENT. (88) DENTAL EQUIPMENT CORPORATION

8

0-0-45,020,740

6

5

4

3

2


1

LEGEND

NUMBER	REV	VARIATION
7020754-01	A1	877-D(120V,24A) PWR CONT
7020754-02	A1	877-B(240V,12A) PWR CONT

NOTES:


- FOR DETAILED INSTALLATION INSTRUCTIONS OF THE H9544 KITS REFER TO THEIR INDIVIDUAL ASSEMBLY DRAWINGS REFERENCED ON K-PL-7020754-0-DBP.
- ITEM 23, RLO2 CABLE RETRACTOR(S) ONLY TO BE INSTALLED IF RLO2(S) ARE TO BE ADDED TO CABINET.

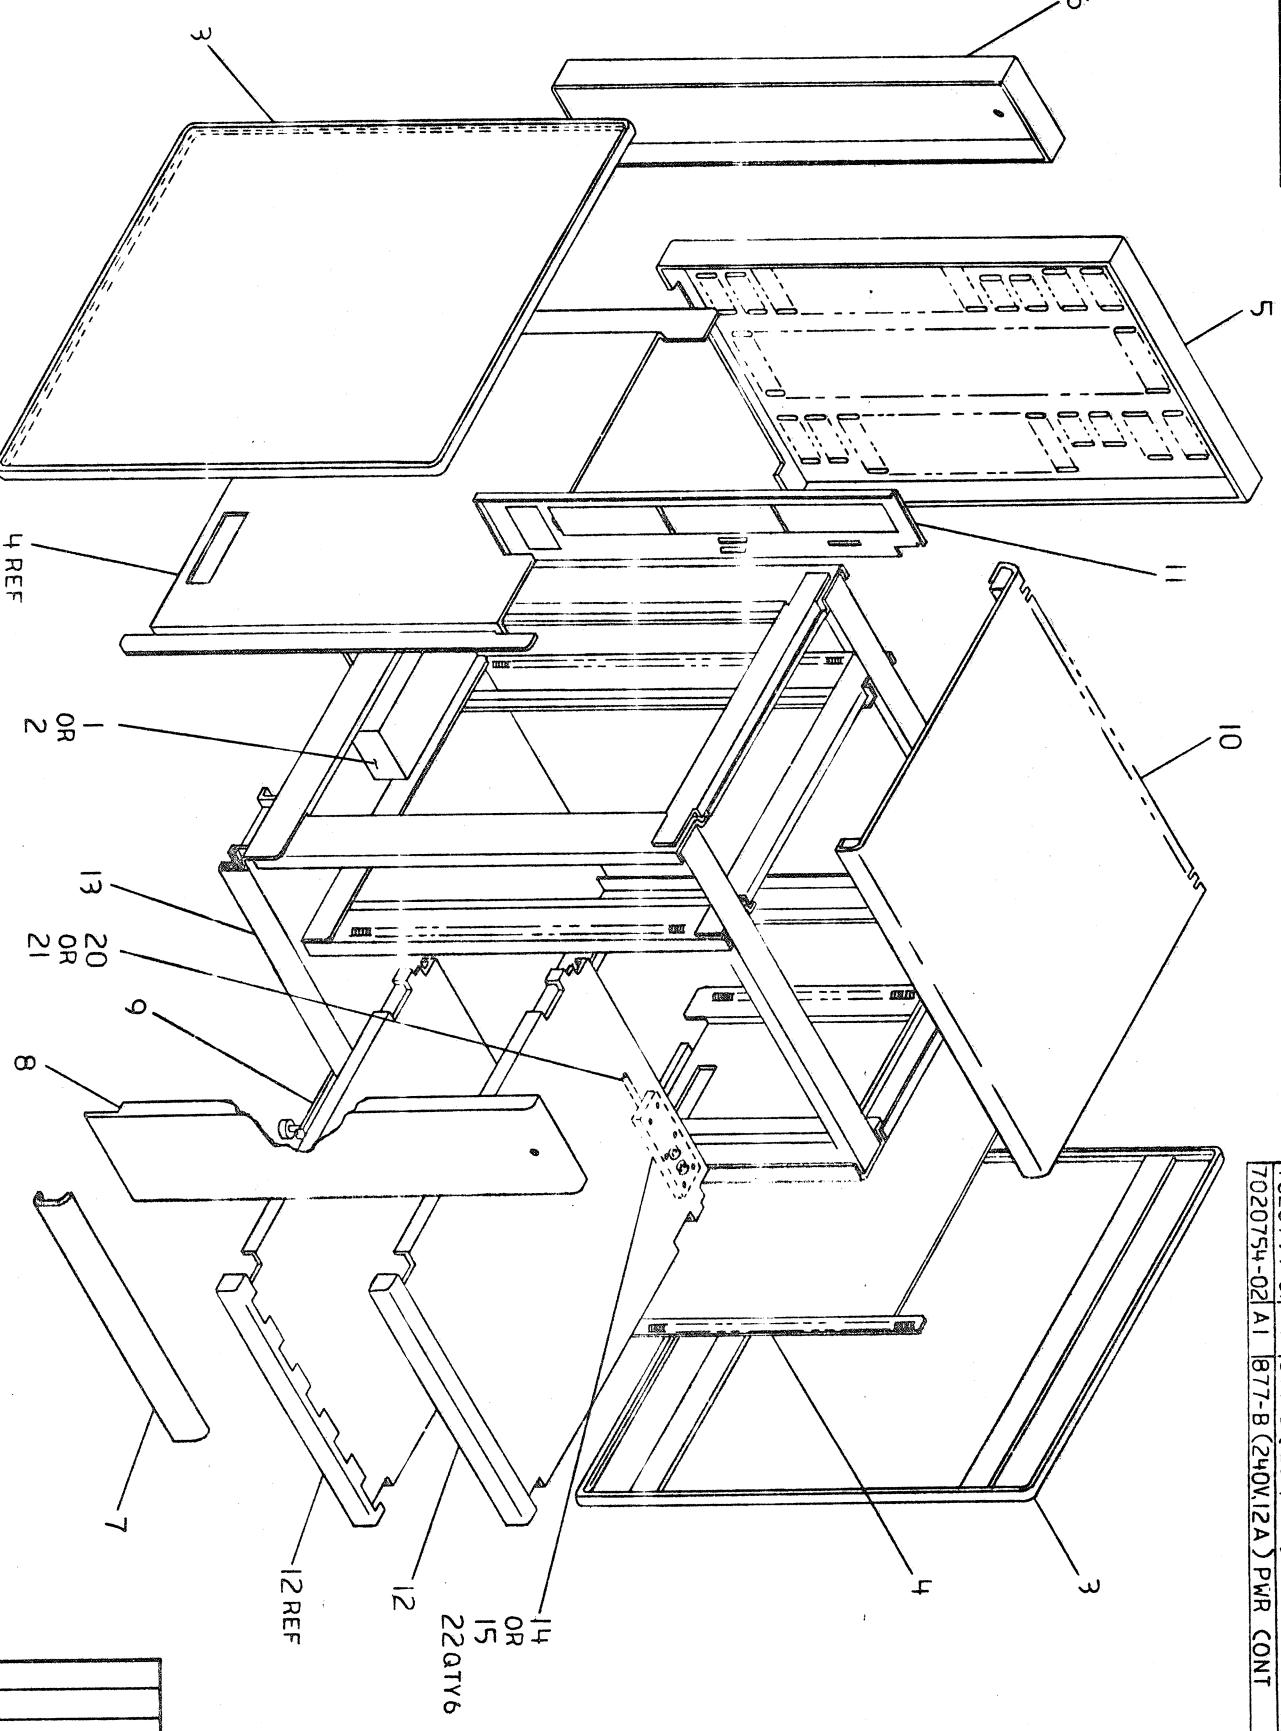

CAUTION: OFF SHEET PARTS LIST EXISTS
SEE K-PL-7020754-0-DBP
Z6712


REVISION HISTORY		
DATE	ECO NUMBER	REV.
INITIAL		A

FIRST HIGHER ASSY 11X41-F		THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING REMOVE BURRS AND BREAK SHARP CORNERS		MATERIAL SEE PARTS LIST		FINISH	
QUANTITY 100 ± 10%		DESCRIPTION		DRAWING NO.		PART NO.		ITEM NO.	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER		OVER	
X ± 1.1		APPLICABLE		OVER		OVER			

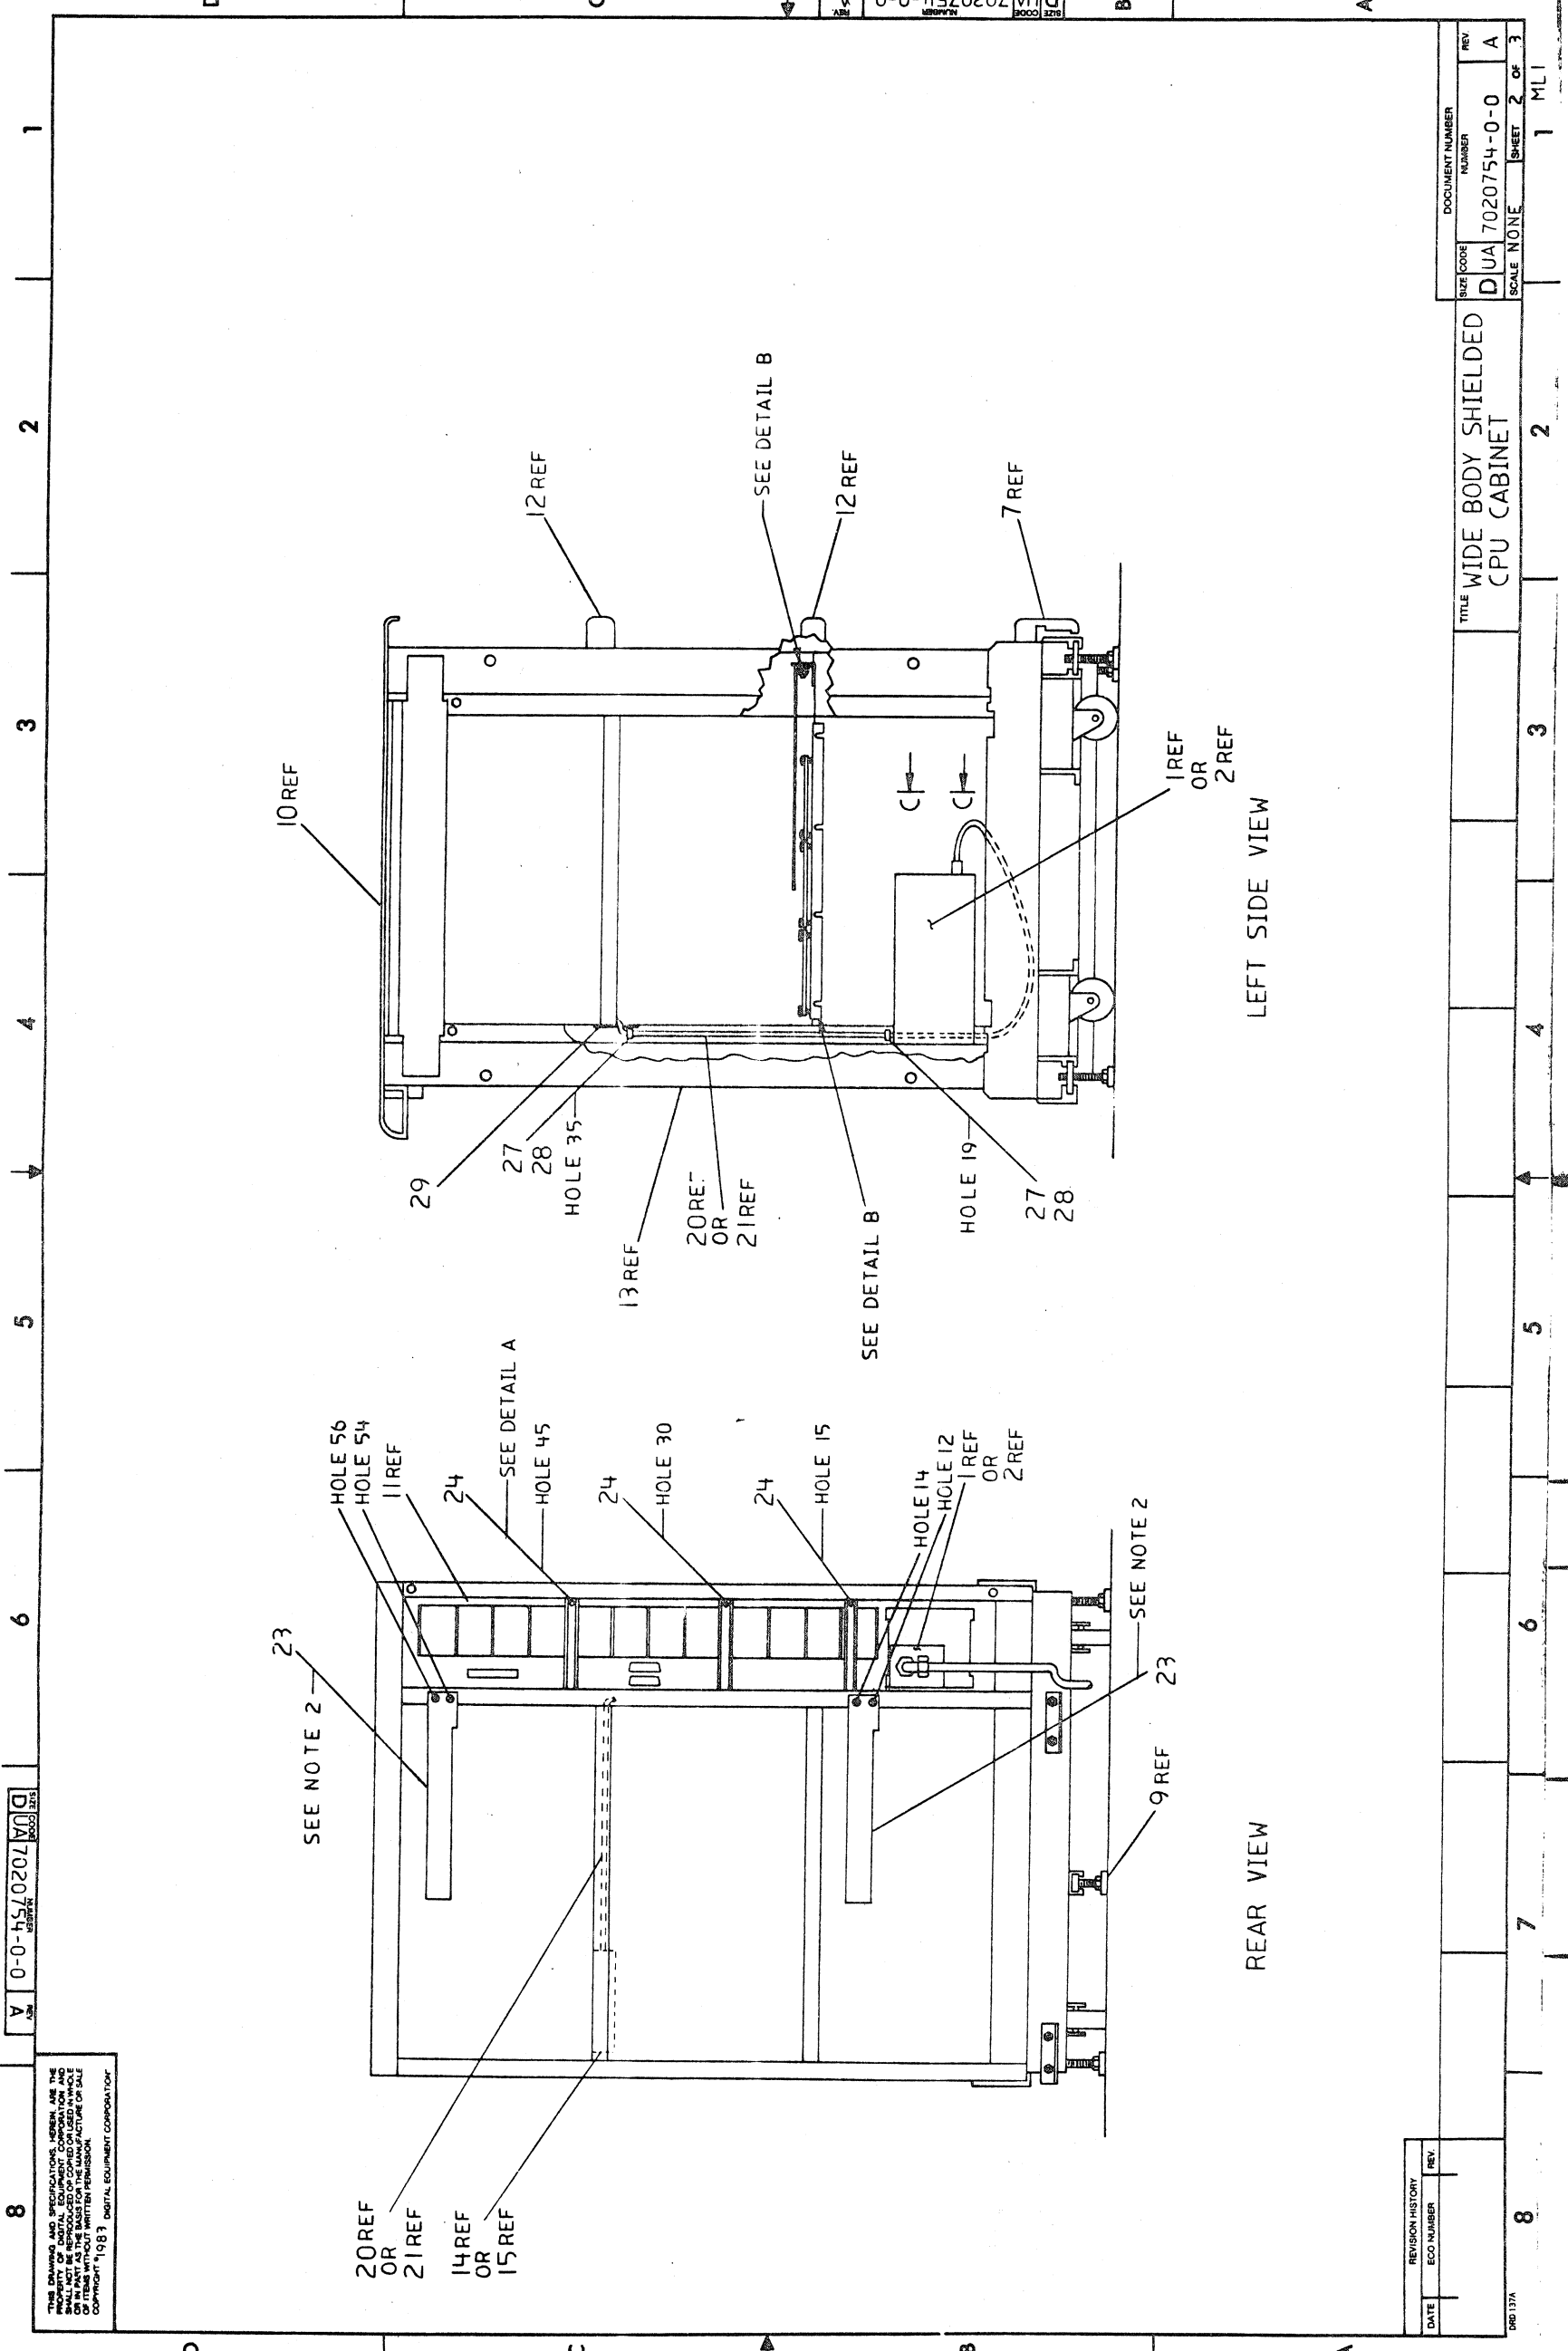


THIS DRAWING AND ASSOCIATION ARE THE PROPERTY OF DODGE EQUIPMENT CORP. AND SHALL NOT BE REPRODUCED OR USED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF DODGE EQUIPMENT CORP. 1983 DODGE EQUIPMENT CORPORATION


8 6 5 4 3 2 1
A 0-0-45/0202 V/D
REV. 1
D

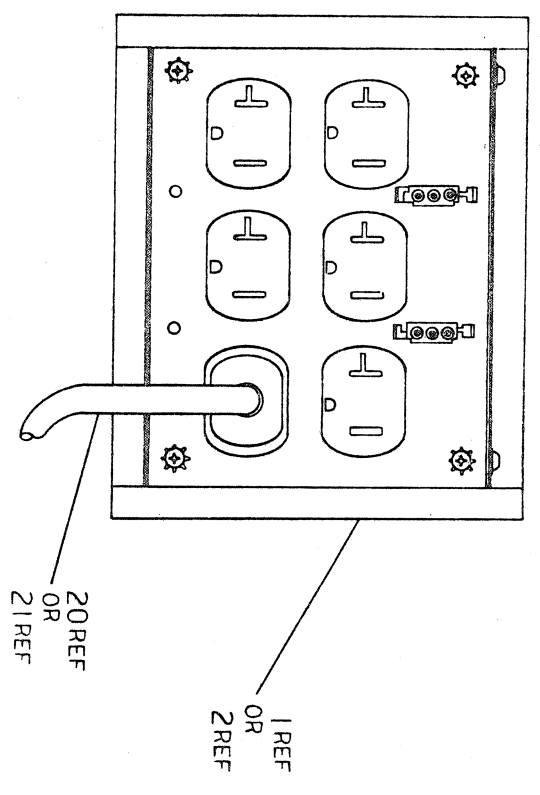

VIEW C-C

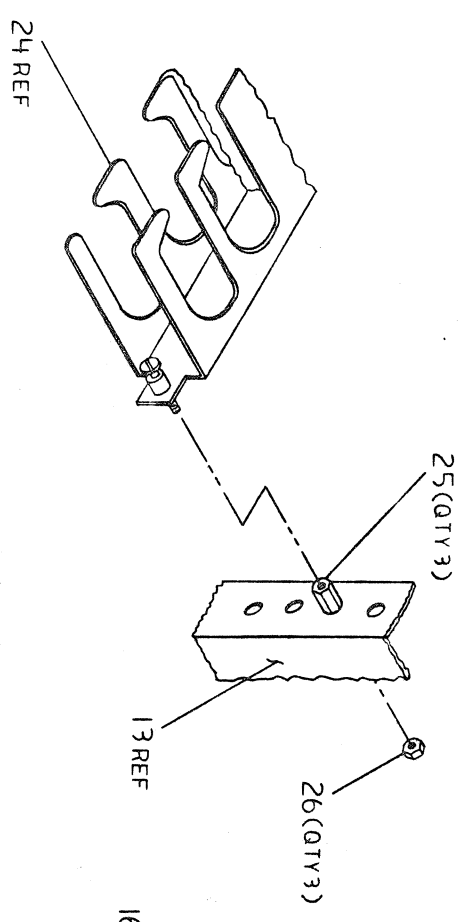

DETAIL A
SCALE: NONE
TYP 3 PLACES

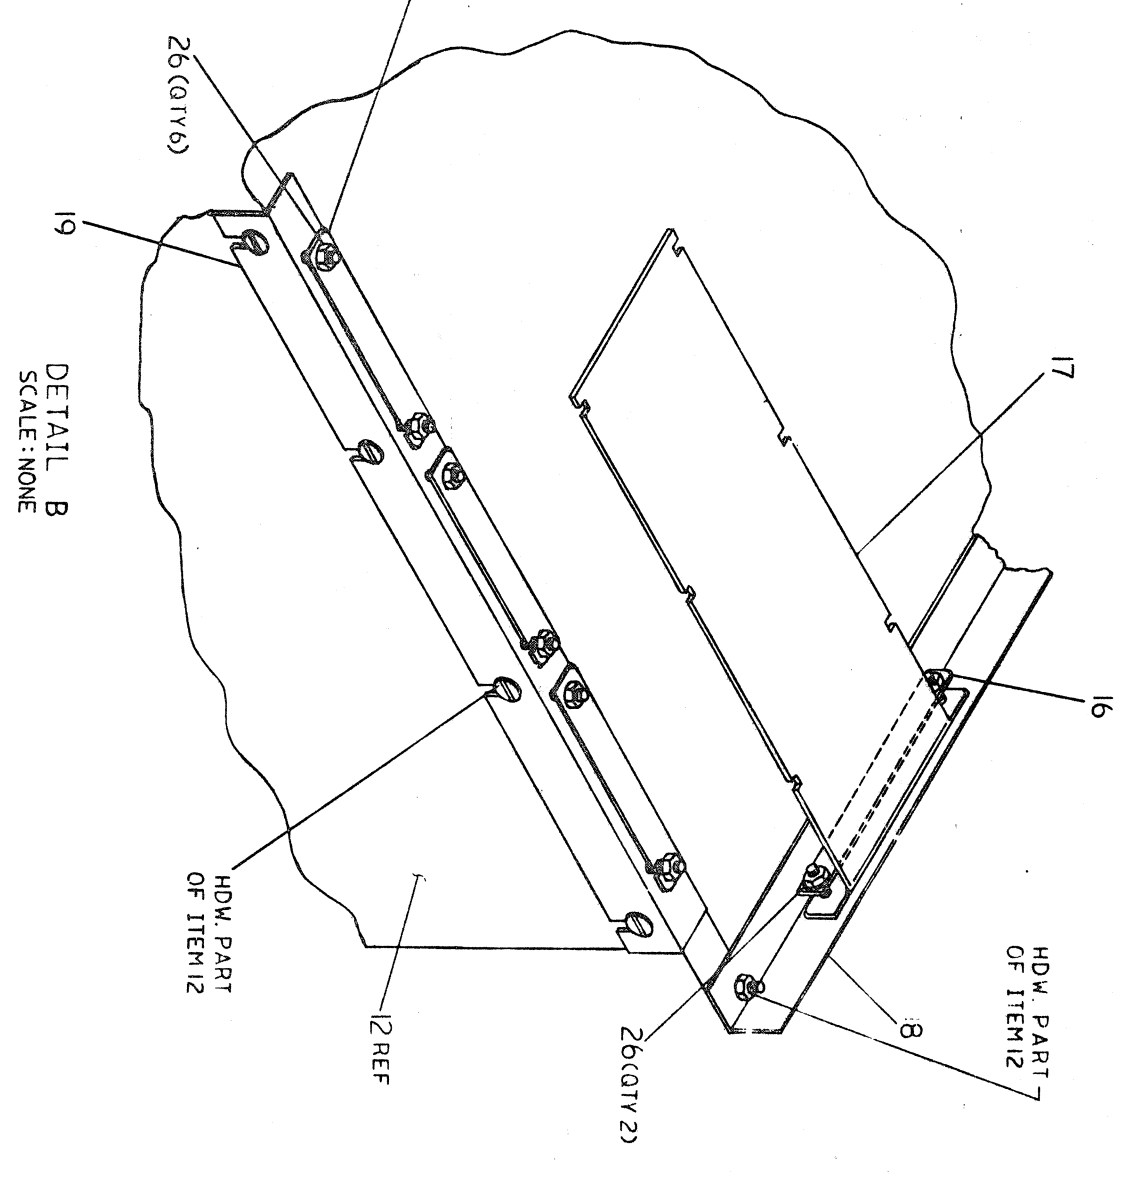

DETAIL B
SCALE: NONE

REVISION HISTORY	
DATE	REV.
ECO NUMBER	REV.

DOCUMENT NUMBER	
SIZE CODE	NUMBER
DUA7020754-0-0	A
SCALE	1 MLI
NONE	3 OF 3

SIZE CODE DUA7020754-0-0 REV. A

LINE ITEM	DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QUANTITY PER VARIATION 01 02
1	E-UA-877-0-DBU	00877-B	240V 12A FILTERED POWER CTL, 4 SW	1
2	E-UA-877-0-DBU	00877-D	120V 2-A FILTERED POWER CTL, 4 SW	1
3	E-UA-H9544-A-0	H9544-AA	40" END PANEL, GREY FRAME, BROWN I	2
4	E-UA-H9544-A-0	H9544-AE	SHIELDING INSERT, 40" END PANEL	1
5	E-UA-H9544-B-DBU	H9544-BF	SHIELDED REAR DOOR, 40" SINGLE WI	1
6	E-UA-H9544-B-DBU	H9544-BH	SHIELDED REAR DOOR, 40" WIDE BODY	1
7	D-UA-H9544-D-0	H9544-DC	FRONT COVER, 2.5" X 19", COVERS BA	1
8	E-UA-H9544-E-0	H9544-EL	SHIELDED NARROW FRONT DOOR FOR W	1
9	E-UA-H9544-H-0	H9544-HD	PULL OUT STABILIZER LEG ASSY, 4 L	1
10	E-UA-H9544-L-0	H9544-LK	SHIELDED WIDE BODY TOP COVER, #68	1
11	E-AR-H9544-SF-DBU	H9544-SF	SHIELDED VERTICAL BULKHEAD, H9545	1
12	E-AR-H9544-SL-DBU	H9544-SL	SHIELDING PARTITION KIT FOR WIDE	1
13	E-UA-H9545-F-0	H9545-FF	40" WIDE BODY CAB FRAME ASSY WIT	1
14		1221374-03	FILTER, EMI/RFI 120/240 LINE INTE	1
15		1221374-04	FILTER, EMI/RFI 120/240 LINE INTE	1
16	C-MD-7413107-0-0	7413107-00	BAR (BA11-FK)	4
17	D-MD-7428673-0-DBU	7428673-01	SPRING, CABLE	1
18	D-IA-7428674-0-DBU	7428674-01	BRACKET, CABLE ROUTING	1
19	D-IA-7428676-0-DBU	7428676-01	BRACKET, CABLE ROUTING	1
20		1700083-01	PWR CORD, TERM 3-14 SJT 250	1
21		1700083-02	PWR CORD, TERM 3-14 SJT 125	1
22	D-UA-H026-0-0	9009988-11	SCREW, SEMS HEX SLOT 6-	6
23		OH026-00	CABLE RETRACTOR FOR RL01, RL02	2
24	D-IA-7427464-0-DBU	7427464-01	BRACE, CABLE BUNDLE	2
25		9008841-01	STANDOFF, MALE/FEMALE HEX 10-32	3
26		9006565-00	NUT, HEX EXT TOOTH LCKWSHR 10-32	11
27		9007867-00	MOUNT, PUSH, CABLE TIE	2
28		9007032-00	TIE, CABLE BUNDL. DIA 0-1-3/4"=101	2
29		9009718-04	GROMMET, STRIP STYRENE	1
REVISION HISTORY				
ENG	ECO NUMBER	REV	DRN	DATE
	INITIAL	A	R. STREETER	17-JUN-83
SECTION. VARIATION INDEX				
	[A] 01,02		D. HEALY	04-AUG-83
	[B]			
	[C]		R. LEWIS	04-AUG-83
	[D]			
	[E]		R. LEWIS	04-AUG-83
	[F]		R. SMITH	04-AUG-83
ASSEMBLY NUMBER:				
	D-UA-7020754-0-0			TOP DOCUMENT NUMBER:
				#B-DD-7020754-0
TITLE				
WIDE BODY SHIELDED CPU CABINET				
DOCUMENT NUMBER				
SIZE: CODE: NUMBER				
	K	PL	7020754-0-DBP	REV
				A
FILE NAME:				
				EDIT #:
				12
"THIS DRAWING AND SPECIFICATIONS HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT (C) 1983. DIGITAL EQUIPMENT CORPORATION "				

30 NOTE: ITEM 23 ONLY REQUIRED WHEN A RL02 IS INSTALLED IN THE CABINET./A

D	I	G	I	T	A	L	TITLE	SECTION A OF A	SIZE	CODE	DOCUMENT NUMBER	REV
YCHK	HH	+3					WIDE BODY SHIELDED CPU CABINET		K	PL	7020754-0-DBP	A