


UNLESS OTHERWISE INDICATED:
RESISTORS ARE 1/4 W, 5%
CAPACITORS ARE .01UF, 100V, 20%
IC'S ARE DEC4102
PIN 12 = GND
PIN 24 = +5V ON EACH IC

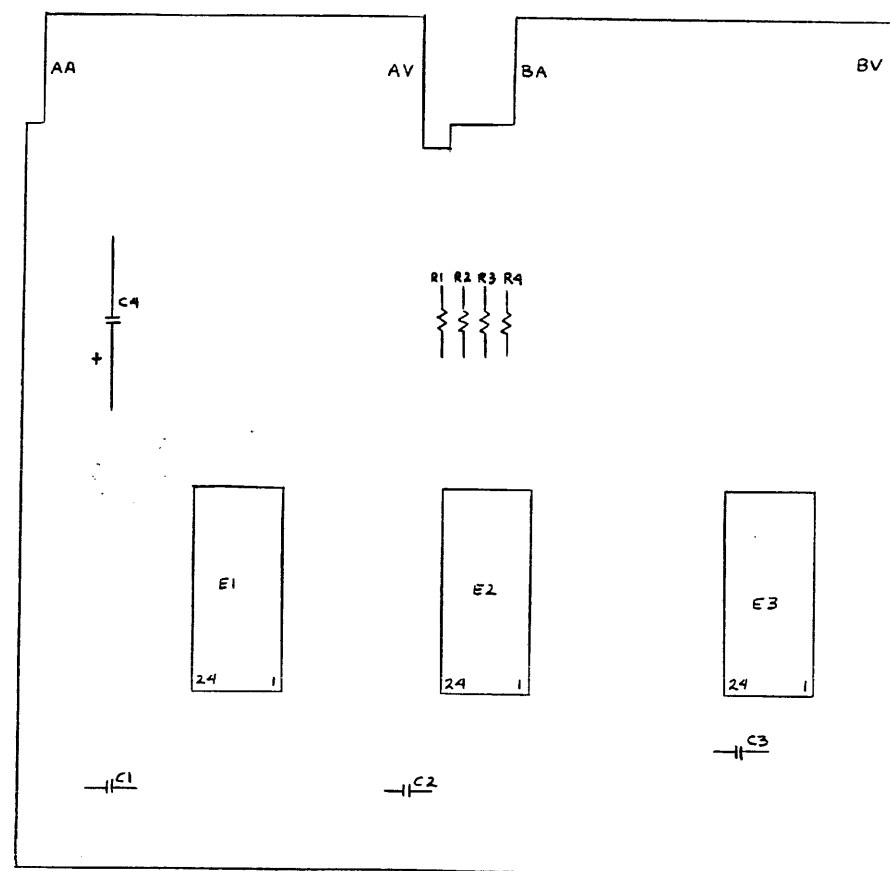

10	9008337-06	HANDLE, FLIP CHIP - MAGENTA	
9	9006732	EYELET #GS 4-7	
8	1909721	I.C. DEC 4102	
7	1300365	RES. 1K, 1/4W, 5K	
6	1001610	CAP. .01UF, 100V, 20% DISC	
5	1000084	CAP. 150UF, 15V, 20%	
4	5009394	ETCHED CIRCUIT BOARD	
3	B-PH-P260-0-6	MODULE ECO HISTORY	
2	D-AH-P260-0-5	ASSY/DRILLING HOLE LAYOUT	
1	K-CO-P260-0-4	X-Y COORDINATE HOLE LOCATION	
1 TRP MC.	EC PART NO.	DESCRIPTION	Q
		PARTS LIST	

[illegible]

digital EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS	TITLE 16 WORD X 12 BIT ASS. MEM. CELL M260	
	SIZE D CODE CS	NUMBER M260-0-1