

**DK8-EC crystal
real time clock
engineering drawings**

MASTER DRAWING LIST

[illegible]

DIGITAL EQUIPMENT CORPORATION

MAYNARD, MASSACHUSETTS

PARTS LIST

MADE BY K. GULICK

DATE 3/23/71

ENG *Al De Zucco*

DATE 4/6/71

CHECKED K. RUSS

DATE 3/23/71

PROD *Leroy Saylor*

DATE 4/2/71

SECTION

1

ISSUED SECT.

1

QUANTITY / VARIATION

DK8-EA

DK8-EC

1

1

—

1

1

1

ITEM
NO.

DWG NO. / PART NO.

DESCRIPTION

1

E-CS-M882-0-1

[illegible]

2

E-CS-M8930-0-1

REAL TIME CLOCK (CRYSTAL)

3

D-1A-7007128-D-0

28 VAC POWER CABLE

TITLE

REAL TIME CLOCK DK8-E

ASSY NO.

SHEET 1 OF 1

SIZE	CODE
------	------

A PL

NUMBER

DK8-E-0

REV.

A

ECO NO	
--------	--

DK8E—
0000E

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

DIGITAL EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

ENGINEERING SPECIFICATION

DATE 10/13/71

TITLE Engineering Specifications for DK8-EC M8830 Real Time Clock (crystal)

REVISIONS

REV	DESCRIPTION	CHG NO	ORIG	DATE	APPD BY	DATE

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE Engineering Specs for DK8-EC (M8830) Real Time Clock (crystal)

DK8-EC Real Time Clock (crystal)

1. General Description

1.1 The DK8-EC(M8830) counts intervals of time at any one of four different selectable rates 1 Hz, 50 Hz, 500 Hz and 5000 Hz. These rates are selected by adding jumpers on the M8830. The M8830 is shipped with a machine inserted jumper selecting the 1 Hz rate.

The DK8-EC plugs into the OMNIBUS of the PDP8-E processor. The frequency is determined by a 20 MHz crystal oscillator divided down through MSI decade counters.

1.1.1 The crystal oscillator, decade counter and the remaining logic is contained on one 8 1/2 inch quad module. All three IOT's for the DK8-EC are decoded on this module and are listed below:

MNEMONIC	CODE	OPERATION
CLEI	6131	Set Interrupt
CLDI	6132	Clear Interrupt
CLSK	6133	Skip on clock flag and clear flag

1.2 Operation

Refer to DK8-EC block diagram and timing diagram. 6132 or initialize will clear the interrupt request flag. The interrupt request line will be asserted if the slave clock flag is set from the master clock flag and will remain asserted until it is cleared by 6132, initialize or 6133. The master clock flag is set every time the frequency source goes high 1, 50, 500 or 5000 times a second.

ENG	A. DeLuca	APPD	<i>Amo Vignani</i>	SIZE	CODE	NUMBER	REV
				A	SP	DK8-EC-4	

DEC FORM NO. 108
DRA 108

SIZE	CODE	NUMBER	REV
A	SP	DK8-EC-4	

DEC FORM NO 10-1022
DRA 108

SHEET 2 OF 3

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE Engineering Specs for DK8-EC M8830 Real Time Clock (crystal)

1.2

Operation (continued)

The skip line is pulled to ground, asserted, if the slave clock flag has been set and the IOT 6133 is issued. The skip line stays at ground for the duration of the IOT 6133. At the end of this IOT the master clock flag will be cleared. TP1 the start of any IOT will clear or set the slave flag depending upon the output state of the master flag. If the master flag has been cleared then the slave will be cleared. With both the master and slave cleared no skip can occur until the next clock pulse which will set the master flag and TP1 will set the slave.

It takes two IOT's to sync to the frequency source the first to clear the master clock flag and the second to skip the moment the master clock flag goes high which will be when the frequency source clock pulse goes high.

Sample Program:

```
6133
JMP.-1
6133
JMP.-1
```

Operating Conditions

Temperature -30° F - 130° F
Humidity -10% - 90% non condensing
Power required +5 volts - 400 ma
Frequency stability = .01%

3. Software:

MAINDEC-8E-D8AA-D-(D) Write Up
MAINDEC-8E-D8AA-PB Tape


SIZE	CODE	NUMBER	REV
A	SP	DK8-EC-4	

SHEET 3 OF 5

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE DK8-EC BLOCK DIAGRAM

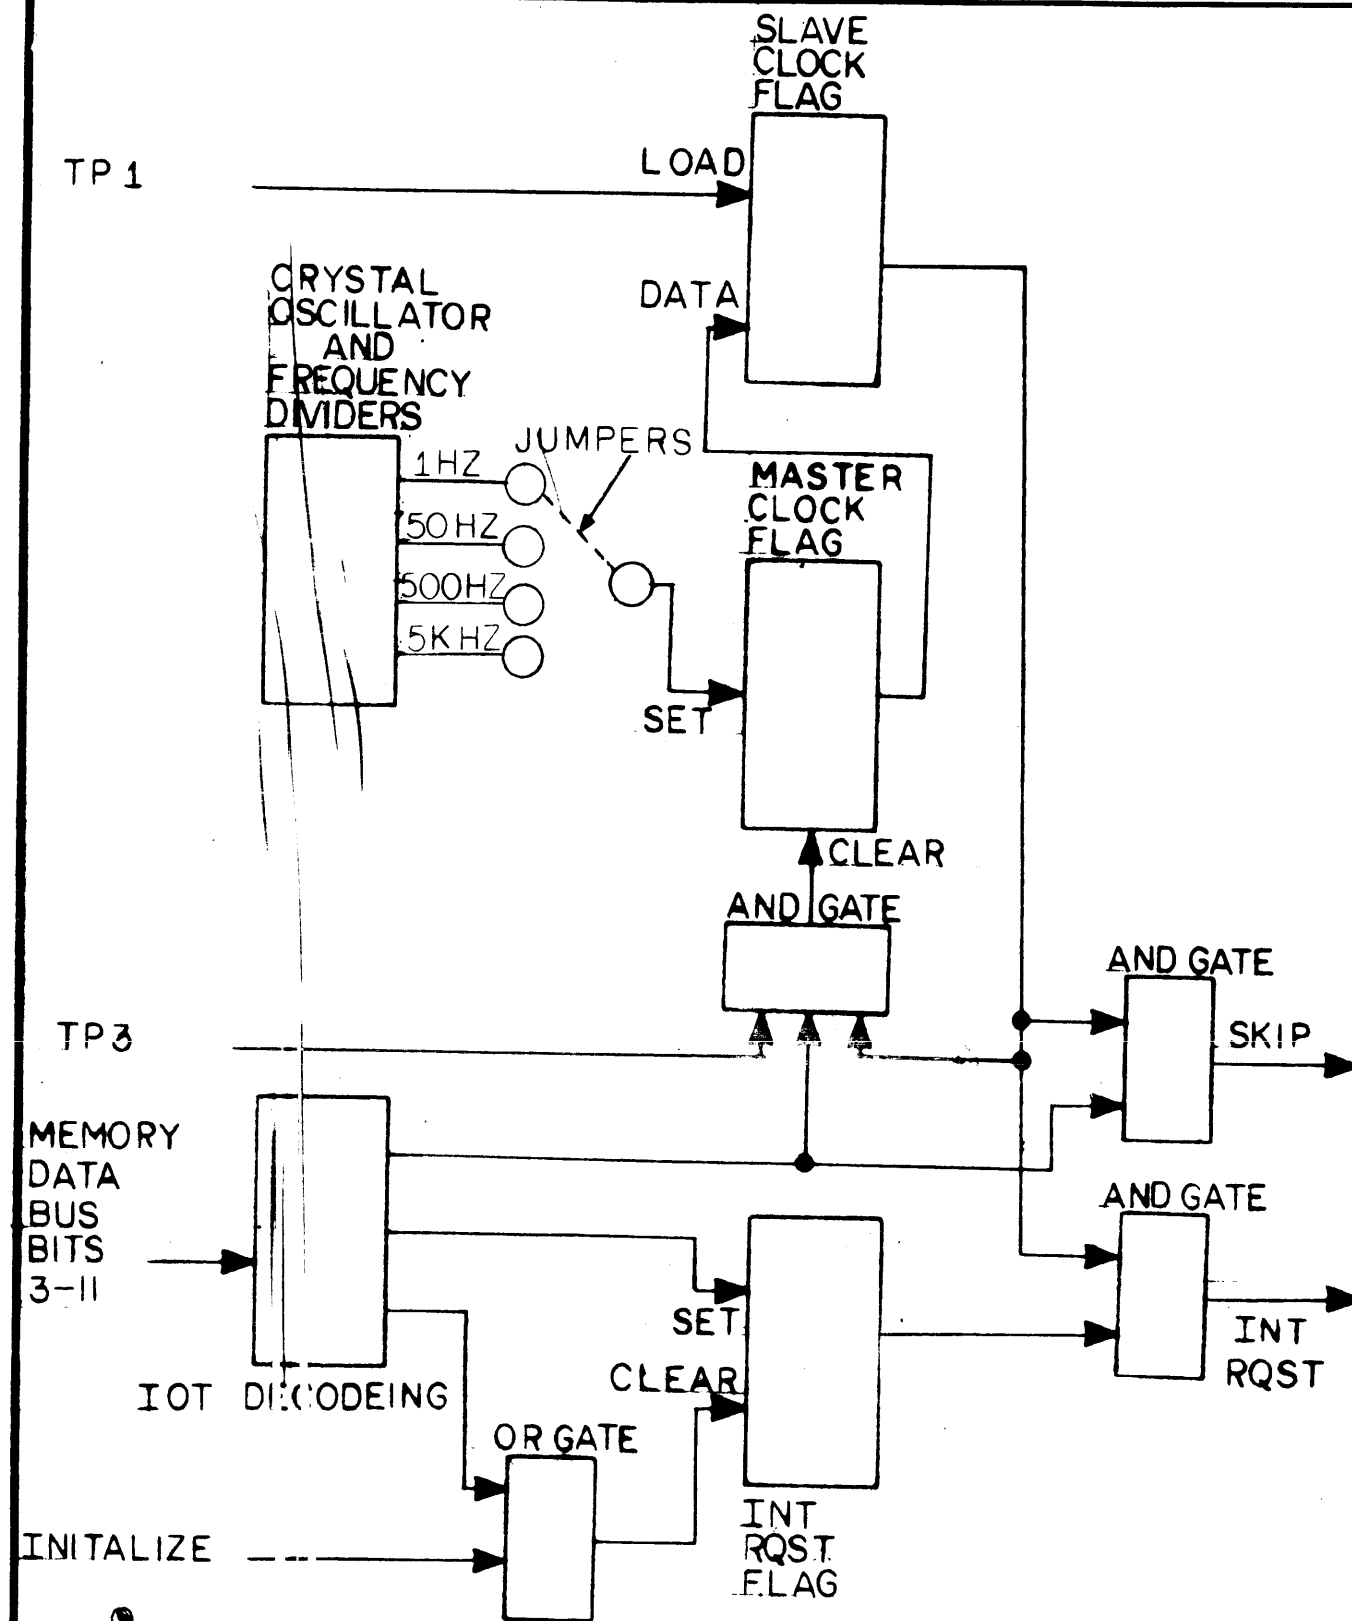

SIZE	CODE	NUMBER	REV
A	SP	DK8-EC-4	

SHEET 4 OF 5

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE DK8-EC TIMING DIAGRAM

FREQUENCY
SOURCE

MASTER
CLOCK
FLAG

TP 1

TP 3

IOT

SLAVE
CLOCK
FLAG

SKIP

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

DIGITAL EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

ENGINEERING SPECIFICATION

DATE 3/17/71

TITLE DK8-EA, EC TEST PROCEDURE

REVISIONS

REV	DESCRIPTION	CHG NO	ORIG	DATE	APPD BY	DATE
A	ECO CHANGE	DK8E-00007	MCCLUSKY	3/18/72	A.D.	3/17/72

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE DK8-EA, EC TEST PROCEDURE

1.0 Equipment

- 1.1 PDP-8/e Standard
- 1.2 Heat Box
- 1.3 453 Scope and Voltage Probes
- 1.4 Teletype
- 1.5 Option module and cable required:
DK8-EA = M882 Module & 7007128 Cable
DK8-EC = M8830 Module

2.0 Test Station Set Up

- 2.1 Check paper work in the envelope, making sure it is complete as required by DEC Standard #101.
 - 2.1.1 Test and Inspection Record.
 - 2.1.2 Key Sheet and ECO Status Sheet will contain both CS and etch revision.
 - 2.1.3 Quality Control Inspection Report
 - 2.1.4 PDP-8/e Progress Report (inserted at this time).
- 2.2 Insert M882 or M8830 module in the Omnibus per Recommended Module Assignment List (ASP-PDP-8/e-0-4).
- 2.3 Connect the red wire from the 7007128 cable to the middle hole of the amp connector (J5, H724 power supply) and either white wire on each side of the red one. Insert the Mate-N-Lock end of the cable to the M882 module. The 7007128 cable can be daisy-chained.
- 2.4 Turn on PDP-8/e power

ENG	APPD	SIZE	CODE	NUMBER	REV
Al De Luca	Al De Luca	A	SP	DK8-EC-5	A

DEC FORM NO. 107

SHEET 1 OF 5

SIZE	CODE	NUMBER	REV
A	SP	DK8-EC-5	A

DEC FORM NO 16-1022

SHEET 2 OF 5

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE DK8-EA, EC TEST PROCEDURE

3.0 High Speed Dump Operating Procedure (USING MOTHER SYSTEM
IF NOT USING MOTHER SYSTEM GO TO STEP 5.0)

3.1 Set test station "On Line" switch to "Off Line".

3.2 Toggle into 8/e memory.

3.2.1 Load address 0001 through switch register.

3.2.2 Deposit 0001/5001
0002/7777
0003/7777

3.2.3 Load address 0001, hit clear and continue.

3.2.4 This initializes the memory; the address lights
will indicate 0001 and MD lights will indicate
5001.

3.3 Set "Auto/Manual" switch to manual.

3.3.1 High speed dump light will light on test panel.

3.4 Set "On Line" switch to "On Line".

3.4.1 On Line light will light.

3.5 Set test station switch register to octal number of
program desired.

3.6 Depress and release initialized switch.

3.6.1 Initialize light will come on and stay there
until mother recognizes stations service request,
then initialize light goes out.

3.7 Program will be loaded and checked by mother computer;
if load is completed, the 8/e will stop at location
0001, MA-0002.

3.7.1 Initialize light is out and the loaded light
goes out.

SIZE	CODE	NUMBER	REV
A	SP	DK8-EA- 5	A

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE DK8-EA, EC TEST PROCEDURE

3.8 If an error, the following lights will/may be lit.

3.8.1 Receive - Data receive by mother not complete,
go back to 3.1 and load again.

3.8.2 Transmit - Data transmitted by mother not
complete; go to 3.1.

3.8.3 Load - Check sum error, go to 3.1.

3.8.4 Illegal Program - Program non-existent; go
to 3.1.

3.8.5 Had load - If load is on, hit initialize key
to clear; go back to 3.1.

3.8.6 If any of the above error lights light, the
program under test will have to be loaded five
successive times to insure the 8/E is not causing
the error.

3.9 Start a program

3.9.1 In order to start a program, consult diagnostic
write-up for starting address.

4.0 DK8 Checkout

4.1 For jumper configurations for different frequencies
(DK8-EC) along with switch register settings required,
consult diagnostic write-up.

4.2 The DK8-EC comes supplied with a machine inserted jumper
selecting the 1 Hz . frequency. The diagnostic should be
run with this configuration for five minutes. The split
lugs on the M8830 module should be scoped and their
correct frequency of 50 Hz, 500 Hz and 5000 Hz verified.

4.3 Execution times are as follows:

Options	Minutes/Pass	Run Time	Program Octal No.
DK8-EA	≈ 2.5	5 Minutes	36
DK8-EC	≈ 2.5	5 Minutes	36

SIZE	CODE	NUMBER	REV
A		DK8-EC- 5	A

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE DK8-EA, EC TEST PROCEDURE

5.0 System or Option Checkout with no Mother System

5.1 Manually load RIM loader into the PDP8/E memory.

5.2 Load Binary Loader into the 8/E memory via RIM Loader and the teletype.

5.3 Load Maindec-8E-D8AA-PB into the 8/E memory via Binary Loader and the teletype. Refer to the program document for starting procedure.

5.4 The DK8-E is considered to be accepted after running the Diagnostic for fifteen minutes.

6.0 Heat Test

6.1 Heat test is to be run after successful completion of all previously indicated tests.

6.2 Run the DK8-E clocks diagnostic for five minutes with the heat box down, ports closed and heat off.

6.3 Raise the heat switch on the test station panel and once the indicator light goes off, run the DK8-E clock's diagnostic for ten minutes.

6.4 Turn the heat switch off and open the two ports on the left side of the heat box.

6.5 Allow fifteen minutes for the machine to cool before removing the heat box.

6.6 Terminate the test once the machine has run for five minutes at room temperature.

7.0 Final Operation and Inspection

7.1 If shipping the DK8-EA or DK8-EC as an add on, disconnect the M882 or M8830 module from the 8/E and the cable from J5 (H724 power supply) if M882 module is used.

7.2 Check that the following paper work has been completed: Envelope, ECO Status Sheet, Q.C. Sheet, PDP8/E Progress Report.

SIZE	CODE	NUMBER	REV
A	SP	DK8-EC-5	A

NOTES: 5 REF

DEC FORM NO
DD FORM 135-E

QTY	REF DESIGNATION	DESCRIPTION	PART NO.	ITEM NO.
PARTS LIST				
ETCH BOARD REV	C			
		DRN. W. MC CARTHY	DATE 8-10-71	 EQUIPMENT CORPORATION PAT. PEND. U.S. & FOREIGN
		CHK'D K. GULICK	DATE 8-13-71	
		ENG. A. DELUCA	DATE 8-16-71	
		PROJ. ENG. A. DELUCA	DATE 8-16-71	
		PROD.	DATE	
		NEXT HIGHER ASSY		
DEC NO.	EIA NO.	M8830		TITLE REAL TIME CLOCK (CRYSTAL)
CONVERSION CHART		SCALE	SIZE CODE	NUMBER
		SHEET 1 OF 2	DICS	M8830-0-1
			DIST.	REV. C


digital EQUIPMENT CORPORATION

TITLE
REAL TIME CLOCK
(CRYSTAL)

SIZE	CODE	NUMBER	REV.
D	CS	V8830-0-1	C

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT ©, DIGITAL EQUIPMENT CORPORATION

REV. C 1-0-0-08830 CS D 2

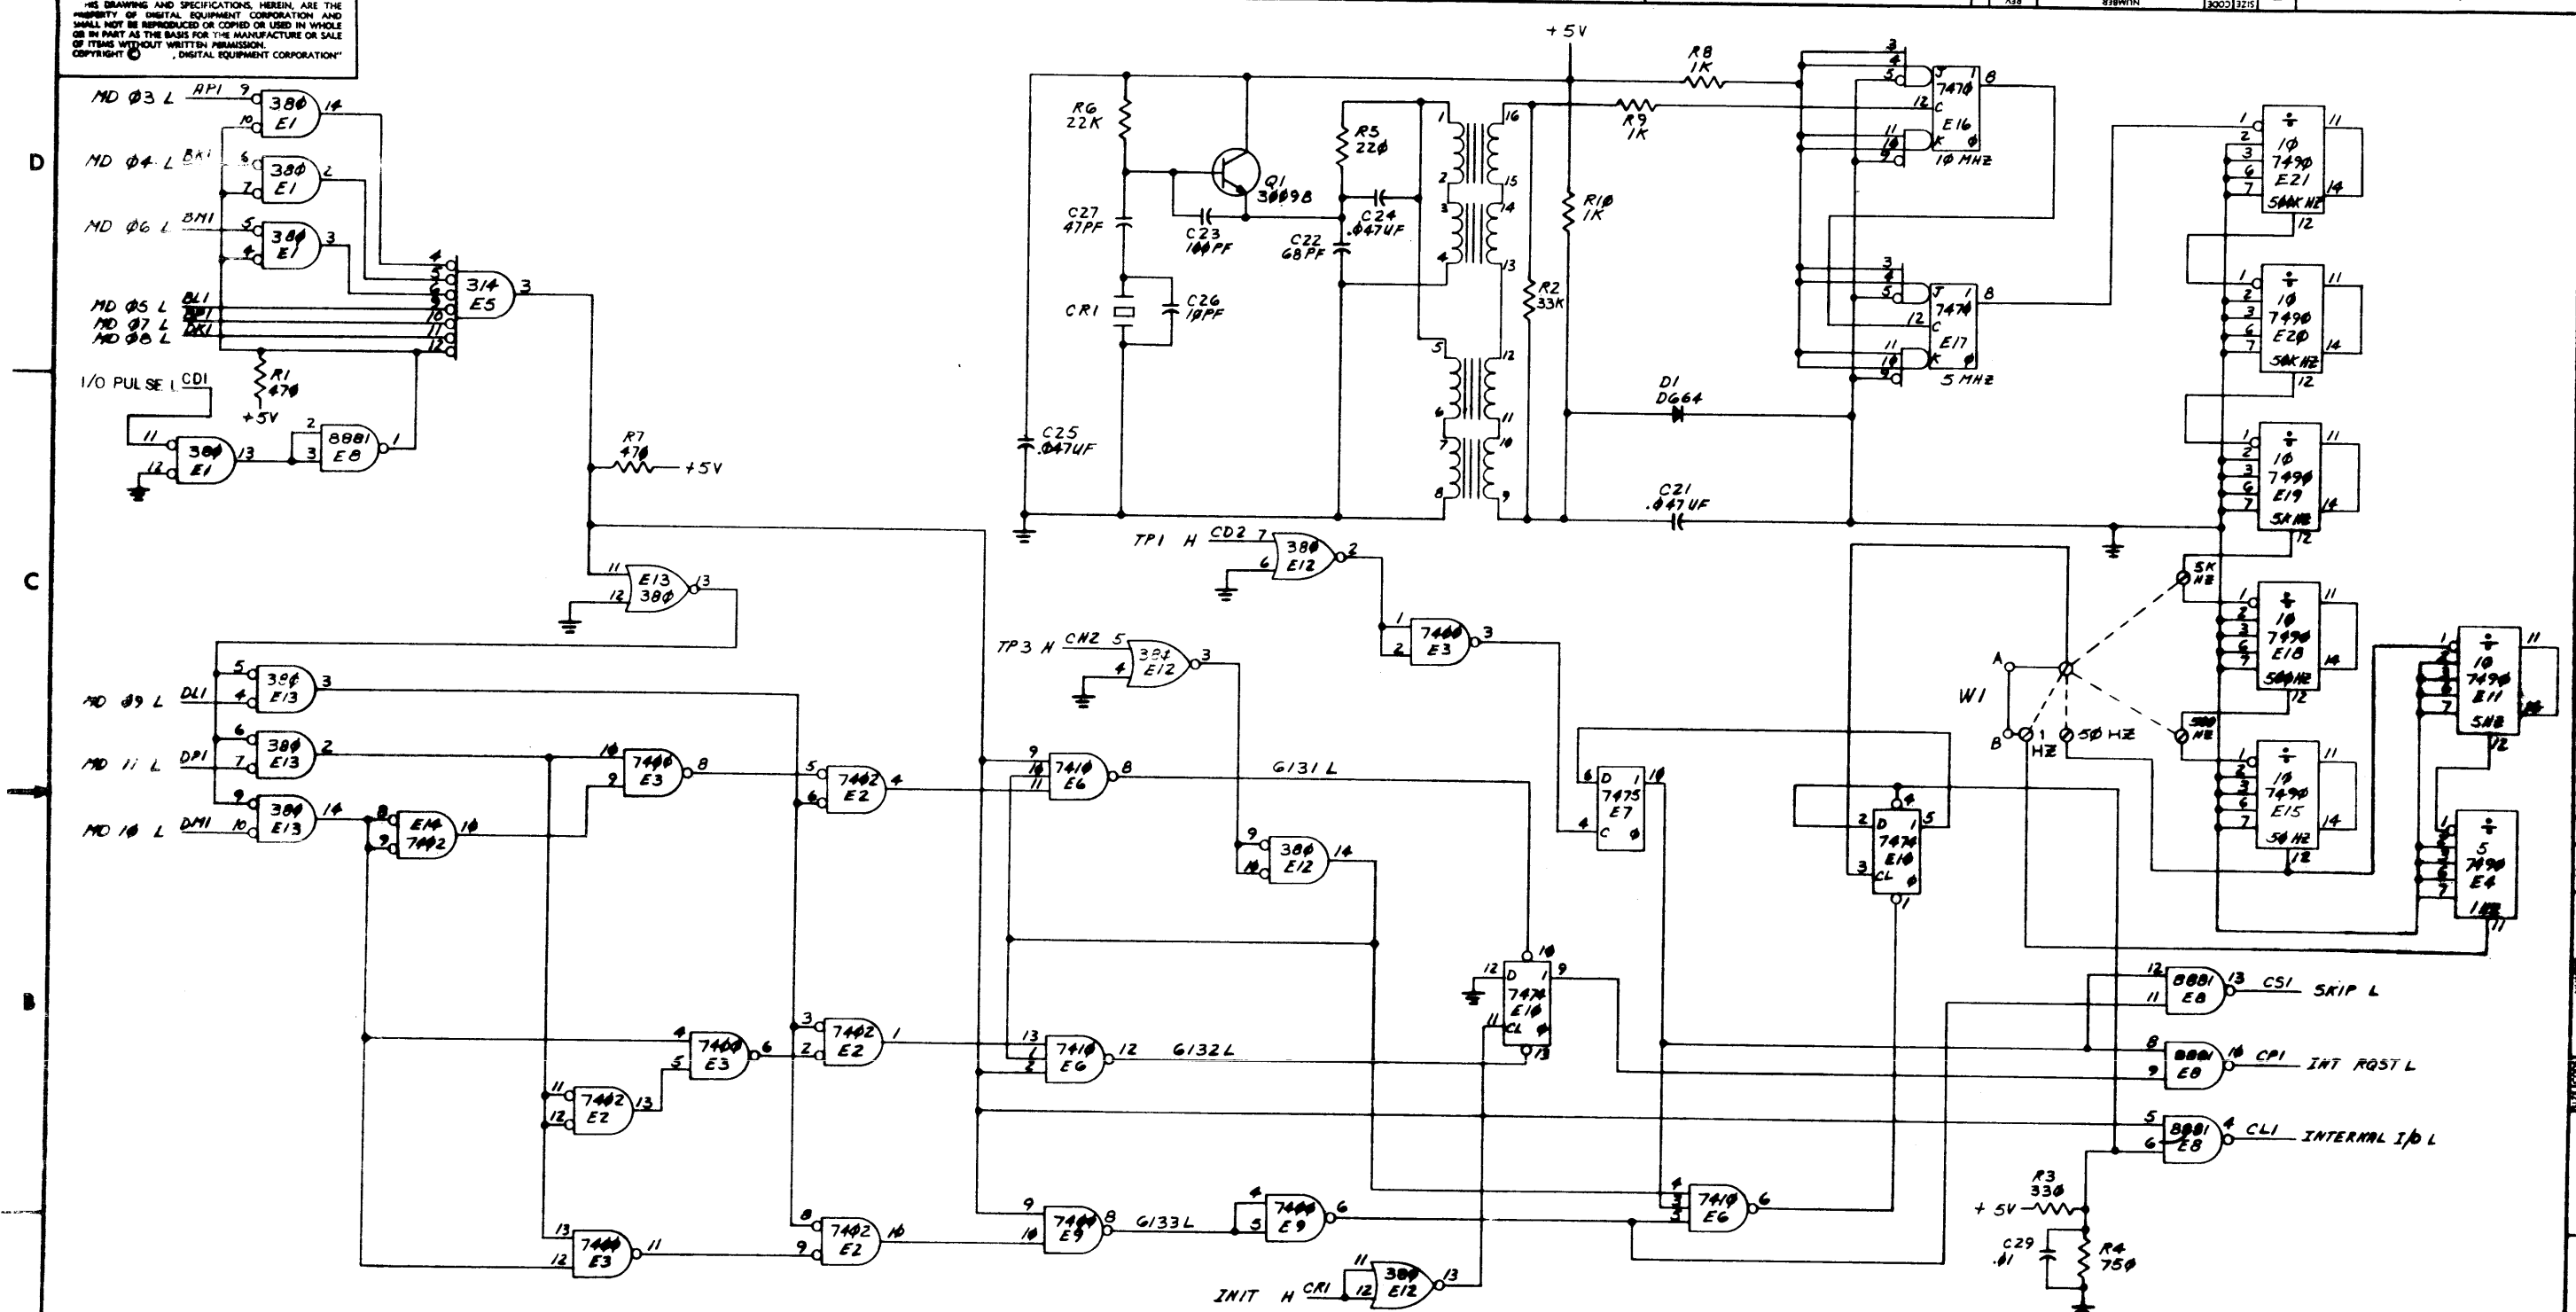

FIRST USED ON OPTION/MODEL			QTY.	DESCRIPTION	PART NO.	ITEM NO.
DIMENSIONAL TOLERANCE			PARTS LIST			
DIMENSIONS ARE <u>MILLIMETERS</u> UNLESS OTHERWISE SPECIFIED			DRN. NORM. CUPEAU CHK'D. KEN GULICK ENG. A. DELUCA PROJ. ENG. A. DELUCA PROD.	DATE 8-6-71 DATE 8-13-71 DATE 8-16-71 DATE 8-16-71 DATE	TITLE REAL TIME CLOCK (CRYSTAL)	
MILLIMETERS	INCHES	ANGLES				
X,XX X,X X	.XXX X X	10° 30'				
THIRD ANGLE PROJECTION			REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY ✓		NEXT HIGHER ASSY.	
					SIZE CODE D CS	
MATERIAL					NUMBER M8830-0-1	
FINISH			SCALE NONE		REV. C	
			SHEET 2 OF 2		DIST.	

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

DIGITAL EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

ENGINEERING SPECIFICATION

DATE 4/1/71

TITLE DK8-EC ACCEPTANCE PROCEDURE

REVISIONS

REV	DESCRIPTION	CHG NO	ORIG	DATE	APPD BY	DATE
A	CHANGE MODULE NUMBER	00005	DE LUCA	12/71	Al DeLuca	12/28/71

ENG <i>RE Dinker</i>	APPD <i>Waver Chertman</i>	SIZE <i>A</i>	CODE <i>SP</i>	NUMBER 7665123-0-0	REV <i>A</i>
----------------------	----------------------------	---------------	----------------	--------------------	--------------

DEC FORM NO.
DRA 107

SHEET 1 of 2

ENGINEERING SPECIFICATION

CONTINUATION SHEET

TITLE DK8-EC ACCEPTANCE PROCEDURE

1.0 SET-UP

- 1.1 Inspect M8830(DK8-EC) module to insure conformance to "Final Inspection Procedure for Flip-Chip Modules" (A-SP-7665039-0-0) and "Module Rework Standard" (A-SP-7605845-0-0).
- 1.2 Check the M8830(DK8-EC) module for a legible three character numerical date code.
- 1.3 Check the M8830 module to insure the circuit and etch revisions are up to current ECO levels and the correct clock frequency jumper is installed.
- 1.4 Make sure the power to the PDP8-E is turned off.
- 1.5 Insert the M8830(DK8-EC) module into the omnibus. Be sure you adhere to the "Recommended Omnibus Assignment List" (A-SP-PDP8-E-0-4).

2.0 ELECTRICAL TEST

- 2.1 Turn on power to the PDP8-E.
- 2.2 Follow the loading procedure for the DK8-EC diagnostic (MAINDEC-8E-D8AA).
- 2.3 Run the DK8-EC diagnostic following the instructions in the program write-up, this test must run error free for a minimum of 15 minutes.

3.0 FAILURE CLASSIFICATION

- 3.1 Mechanical failure.
 - 3.1.1 Any M8830(DK8-EC) module that does not meet the criterion outlined in 1.1, 1.2, and 1.3 will be classified as a failure.
 - 3.1.2 The acceptance supervisor has the option of either waiving the failure (using DEC form 12-1026) or returning the M883 module to production for repair.
- 3.2 Electrical failure.
 - 3.2.1 Any M8830 which while performing 2.3, halts, generates error printouts, garble, or runs other than continuous and as specified in the diagnostic write-up will be classified defective and returned to production for repair.

DEC FORM NO 16-1022
DRA 108

SIZE <i>A</i>	CODE <i>SP</i>	NUMBER 7665123-0-0	REV <i>A</i>
---------------	----------------	--------------------	--------------

SHEET 2 OF 2

[illegible]

DEC FORM NO.
DRA 121