



THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY. COPYRIGHT 1970 BY DIGITAL EQUIPMENT CORPORATION

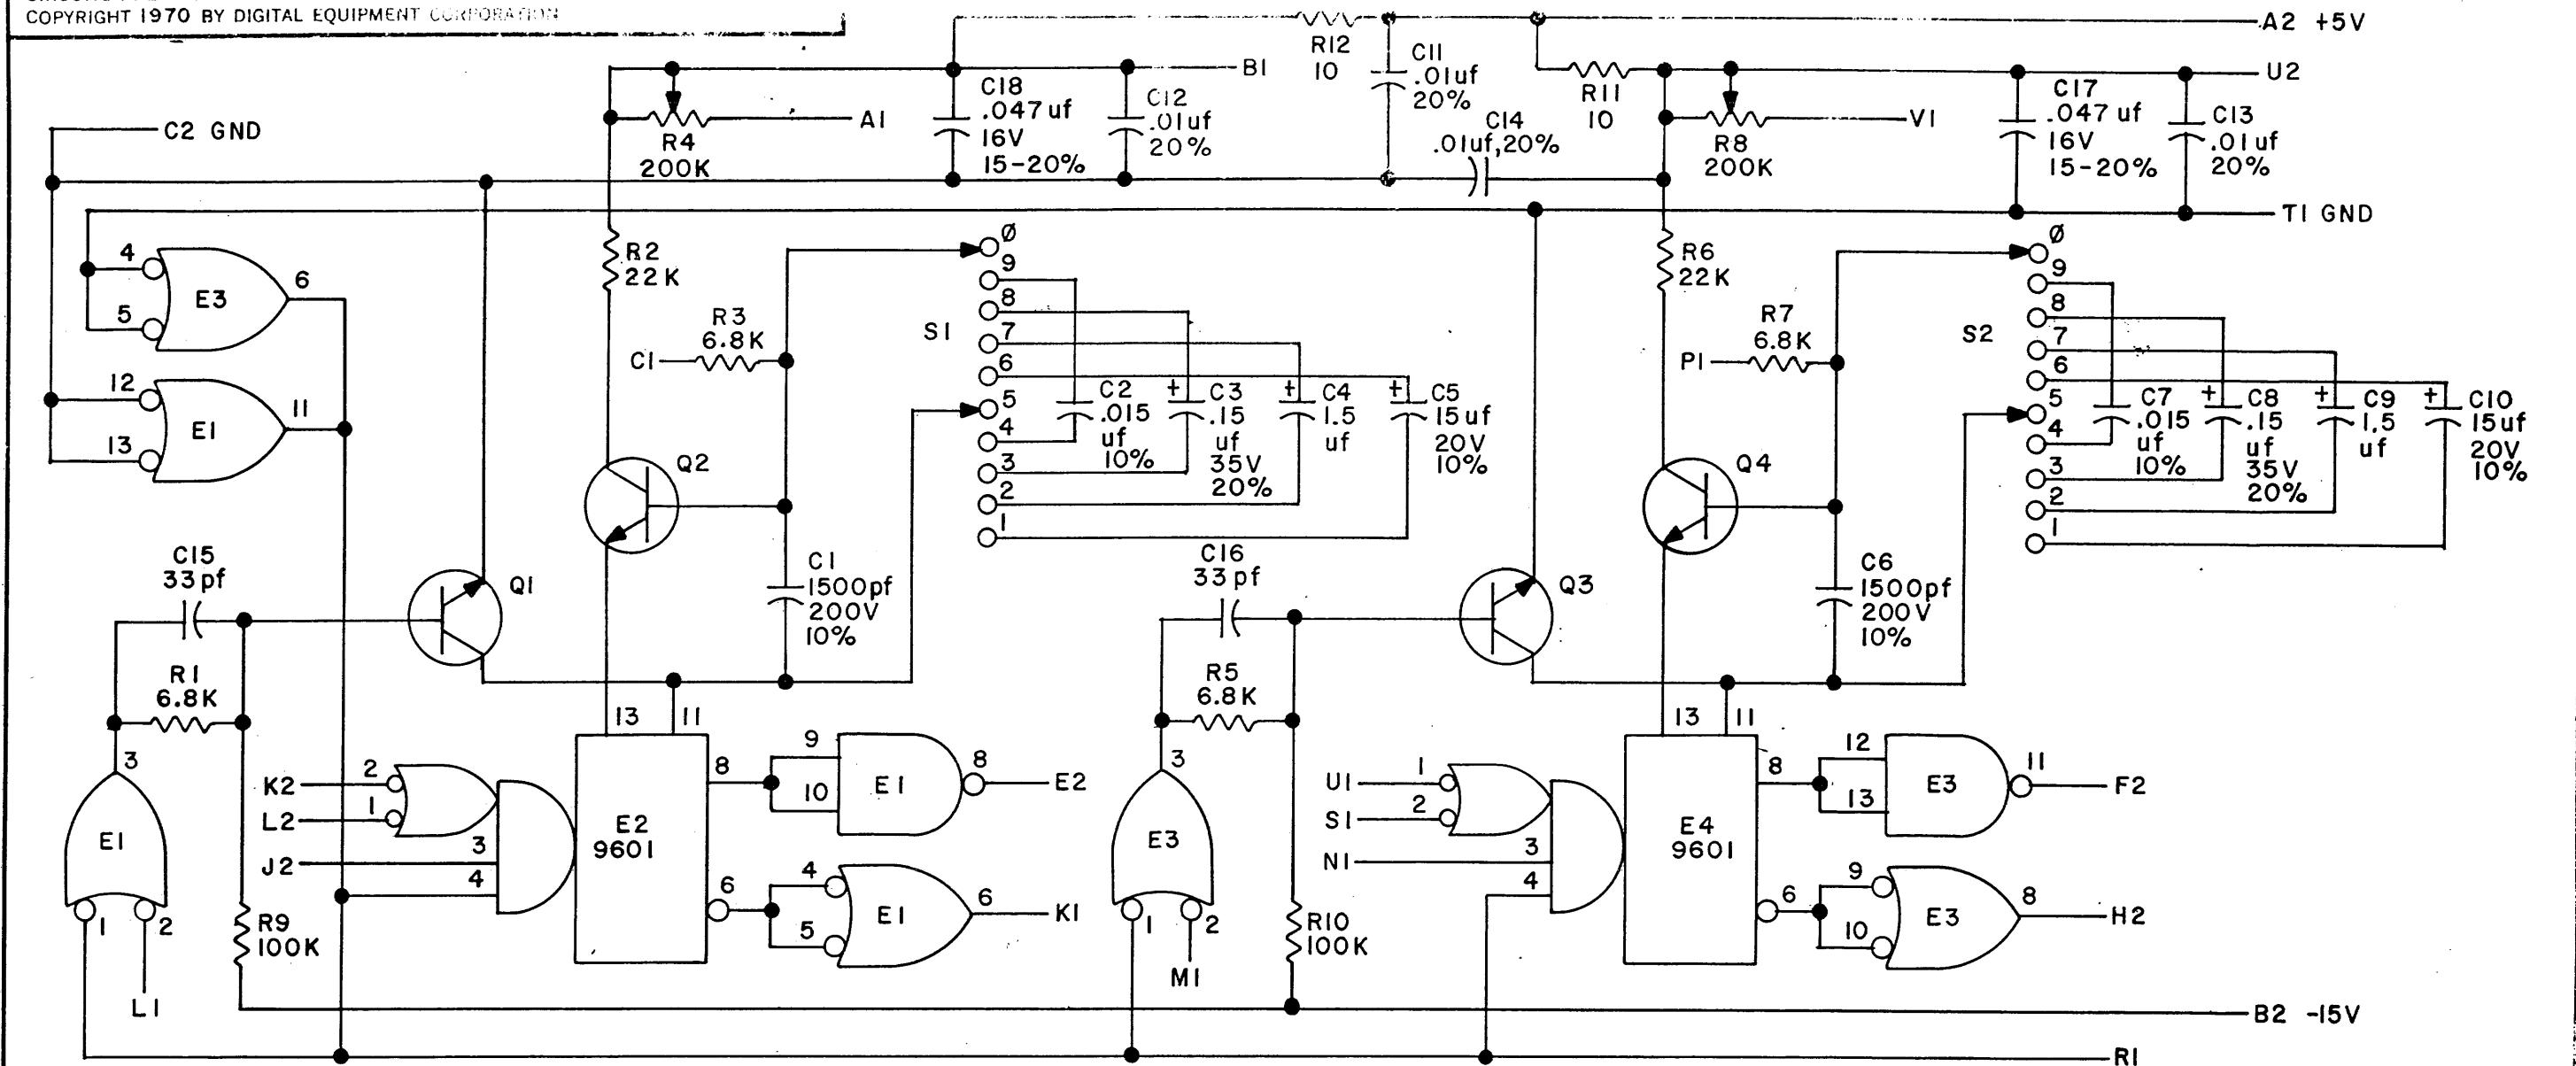

UNLESS OTHERWISE INDICATED:
 TRANSISTORS ARE DEC 3009B
 RESISTORS ARE 1/4W, 5%
 CAPACITORS ARE 100V, 5%
 R4 & R8 ARE 78PR POTS
 SWITCHES ARE 2 POLE, 5 POSITION SPECTROL
 E1, E3 ARE DEC 7400
 PIN 7 ON EACH IC = GND
 PIN 14 ON E1, E3 = +5V
 PIN 14 ON E2 = VCC, PIN B1
 PIN 14 ON E4 = VCC, PIN U2



RANGE 5 5 μ sec. — 50 μ sec.
 4 50 μ sec. — 500 μ sec.
 3 500 μ sec. — 5 msec.
 2 5 msec. — 50 msec.
 1 50 msec. — 500 msec.

REVISIONS CHG NO. REV. A MH 00001 REV. & REDR. B 00002 G. BUDIAISKY 6/1/73-7 00003				DRN. M. HALLER DATE 9-3-69 CHK'D A. YAUGA DATE 9-3-69 ENG. R. SCHWEGLER DATE 9-4-69 PROD. R. SCHWEGLER DATE 9-4-69		TRANSISTOR & DIODE CONVERSION CHART <table border="1"> <tr> <th>DEC</th> <th>EIA</th> <th>DEC</th> <th>EIA</th> </tr> <tr> <td>DEC 3009B</td> <td>2N3009</td> <td></td> <td></td> </tr> </table>				DEC	EIA	DEC	EIA	DEC 3009B	2N3009			digital EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS				TITLE INTEGRATING ONE SHOT M307 <table border="1"> <tr> <th>SIZE</th> <th>CODE</th> <th>NUMBER</th> <th>REV.</th> </tr> <tr> <td>B</td> <td>CS</td> <td>M307-0-1</td> <td>C</td> </tr> </table>				SIZE	CODE	NUMBER	REV.	B	CS	M307-0-1	C
DEC	EIA	DEC	EIA																														
DEC 3009B	2N3009																																
SIZE	CODE	NUMBER	REV.																														
B	CS	M307-0-1	C																														