

DL11-E C/D

OFFLINE TEST
CZDLAGO

AH-8517G-MC


COPYRIGHT © 72-78

FICHE 1 OF 1

JUL 1978

digital

MADE IN USA

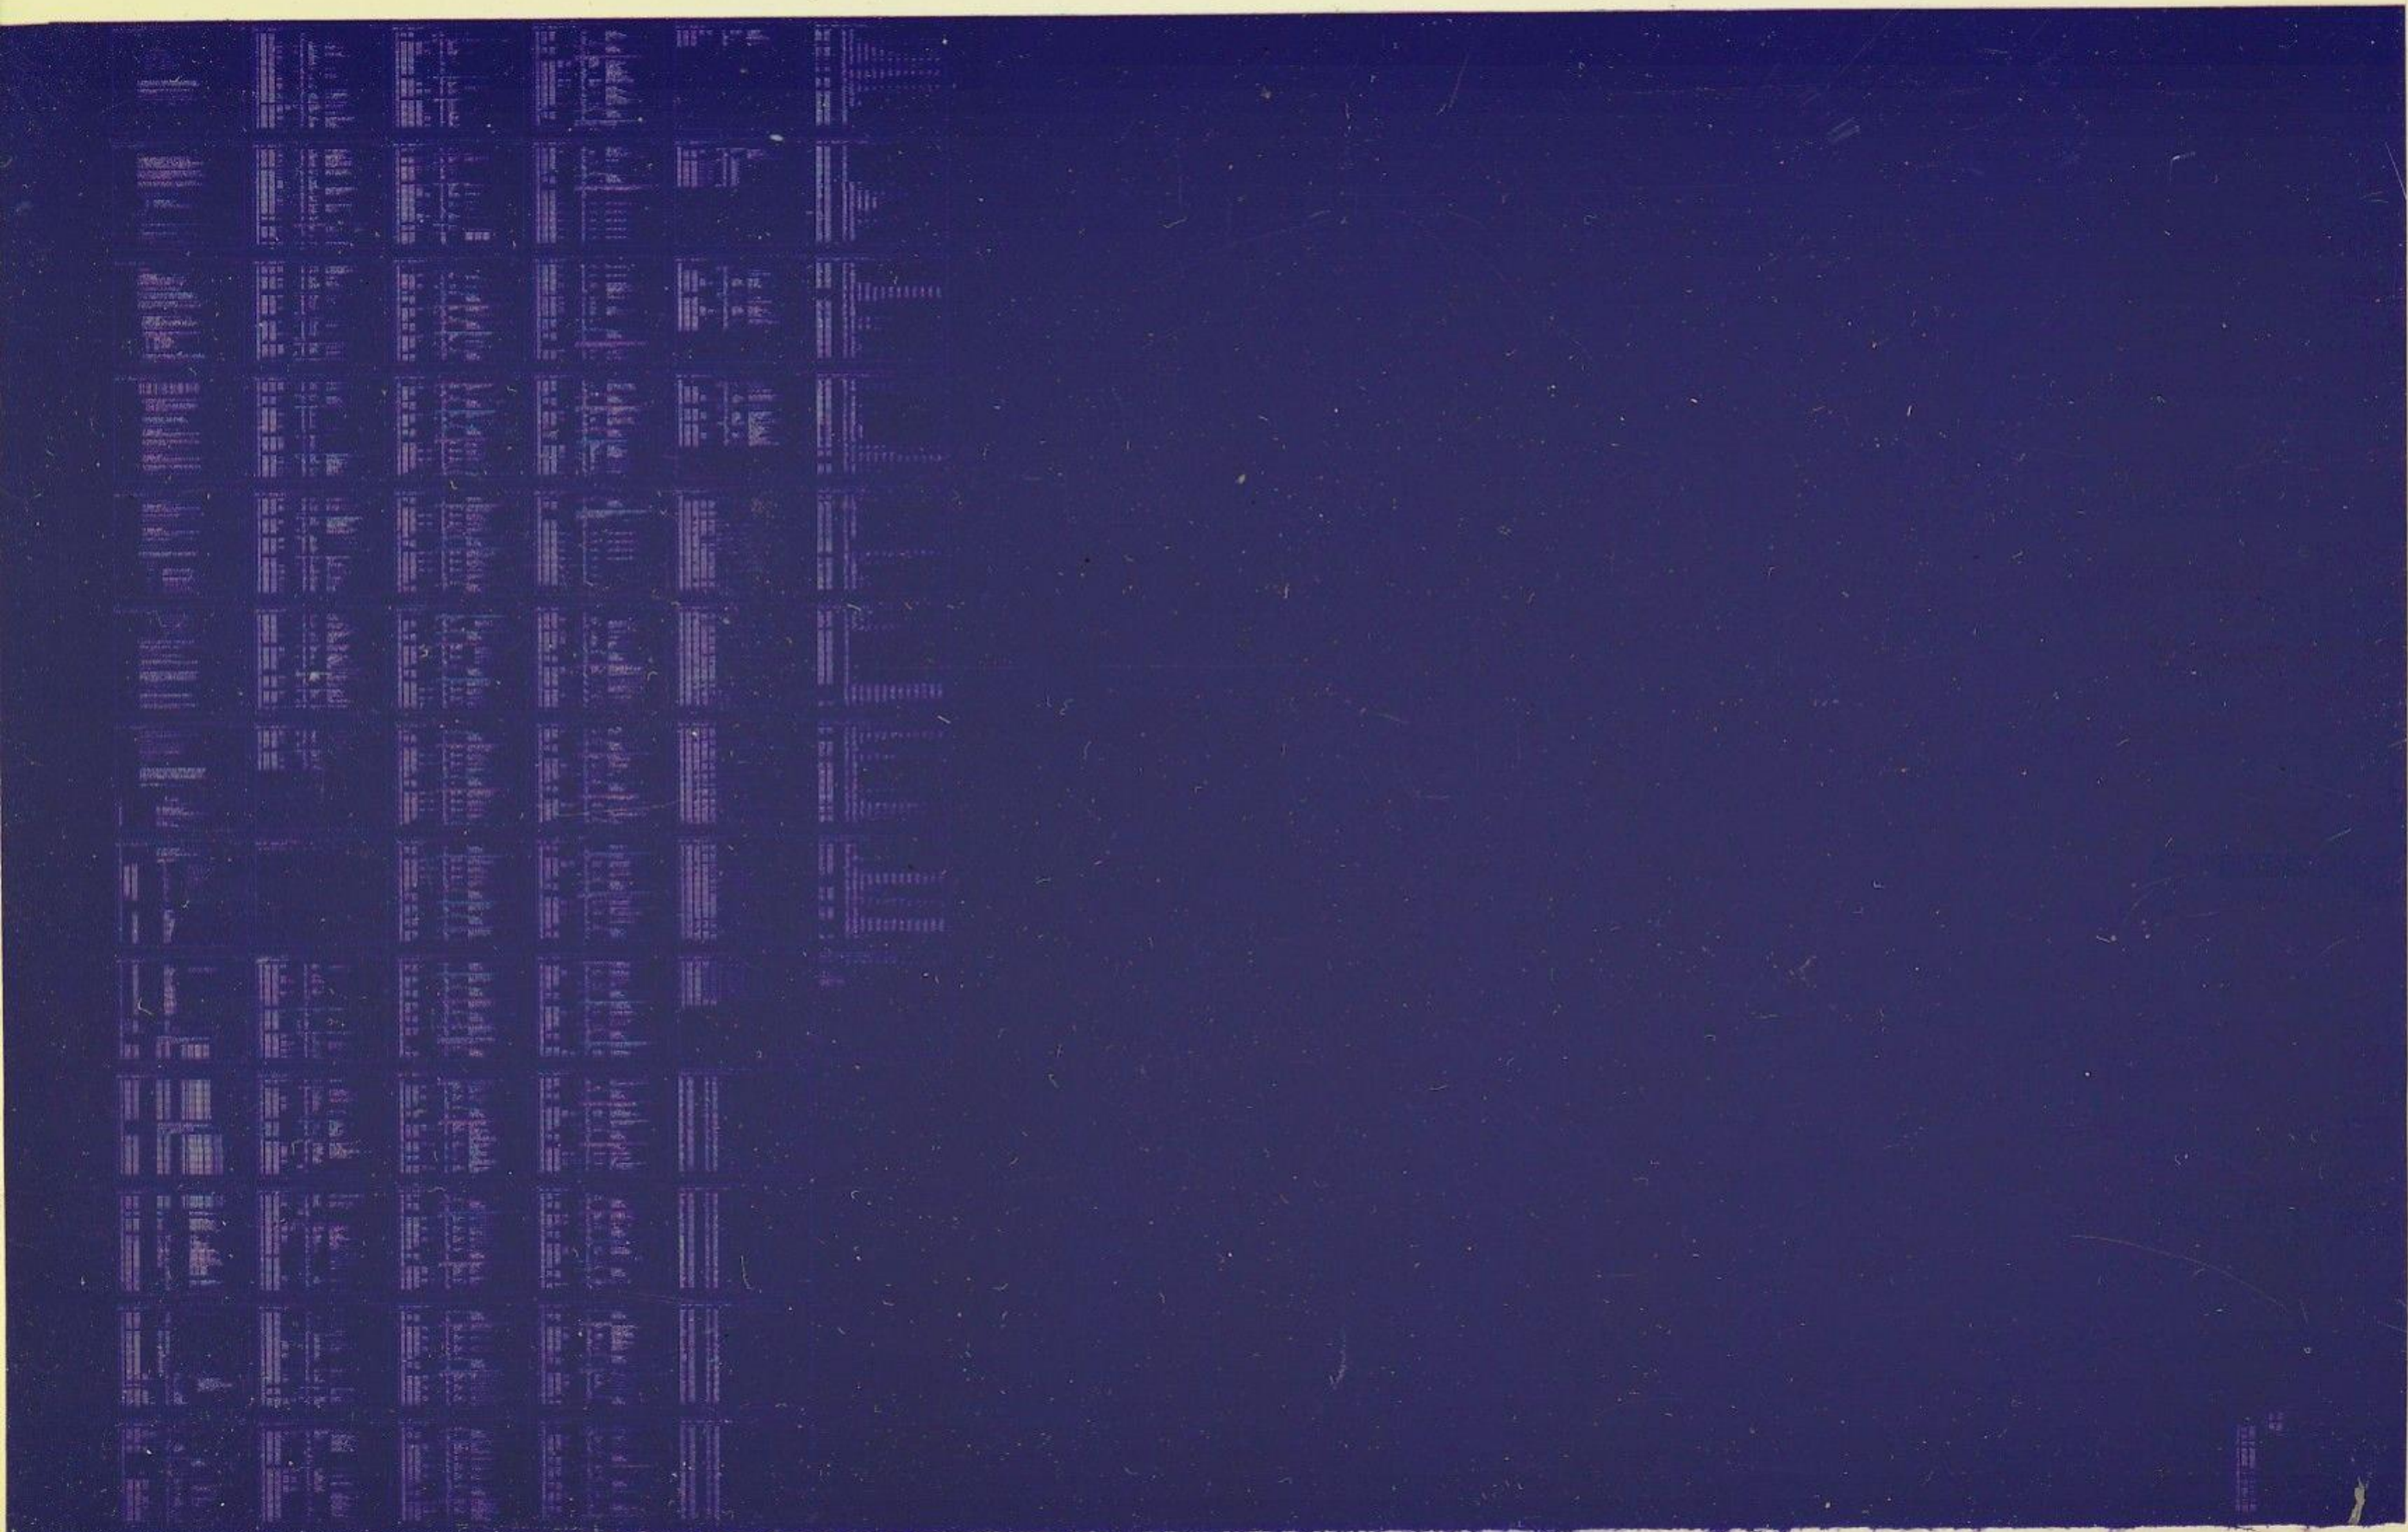

.REM 0
.REPT 0

IDENTIFICATION

PRODUCT CODE: AC-8516G-MC
PRODUCT NAME: CZDLAGO DL11-E,C/D OFLNE TST
DATE: JUNE 1978
MAINTAINER: DIAGNOSTIC GROUP
AUTHOR: ROBERT WHITTON

THE INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY DIGITAL EQUIPMENT CORPORATION. DIGITAL EQUIPMENT CORPORATION ASSUMES NO RESPONSIBILITY FOR ANY ERRORS THAT MAY APPEAR IN THIS DOCUMENT.

NO RESPONSIBILITY IS ASSUMED FOR THE USE OR RELIABILITY OF SOFTWARE ON EQUIPMENT THAT IS NOT SUPPLIED BY DIGITAL OR ITS AFFILIATED COMPANIES.

COPYRIGHT (C) 1972,1978 BY DIGITAL EQUIPMENT CORPORATION

THE FOLLOWING ARE TRADEMARKS OF DIGITAL EQUIPMENT CORPORATION:

DIGITAL	PDP	UNIBUS	MASSBUS
DEC	DECUS	DECTAPE	

1. ABSTRACT

TWO SEPARATE DIAGNOSTIC PROGRAMS ARE PROVIDED FOR THE DL11-E (ASYNCHRONOUS MODEM INTERFACE), CZDLA (DL11-E OFF LINE TESTS) AND CZDLB (DL11-E ON LINE TESTS). THE OFF LINE TEST TESTS ALL DL11-E LOGIC. THE OFF LINE TESTS DO NOT REQUIRE THE USE OF A MODEM, HOWEVER A SPECIAL JUMPER CONNECTOR H315 IS REQUIRED. THE ON LINE TESTS ARE ESSENTIALLY DATA RELIABILITY TESTS REQUIRING THE USE OF MODEMS AND A SUITABLE TERMINAL DEVICE.

THE DL11-C AND DL11-D CAN ALSO BE TESTED WITH THIS OFF LINE TEST. THESE ARE BOTH TESTED IN MAINTENANCE MODE AND ONLY THOSE TESTS MARKED C,D IN THE TEST NUMBER ARE EXECUTED. IN ORDER TO TEST C AND D VERSIONS IT IS NECESSARY TO MODIFY THE TABLE AT LOCATION 1300 ACCORDING TO THE INSTRUCTIONS CONTAINED THERE.

TESTS WHICH ARE NOT EXECUTED FOR DL11C+D CAN BE PERFORMED BY USING THE SELECT SWITCH OPTION (SR9). TEST 56 IS A DATA TEST WHICH CAN BE USED FOR CABLE TESTING DL11-D'S. WARNING--A FAILURE IN THIS TEST MAY OCCUR DUE TO A SPLIT BAUD RATE OF RCVTR/TXVTR.

THIS DOCUMENT DESCRIBES THE OFF LINE TESTS.

THE AVAILABLE TESTS ARE:

PRG0	INPUT/OUTPUT LOGIC TESTS
PRG1	TRANSMITTER SCOPE LOOP
PRG2	RECEIVER SCOPE LOOP
PRG3	SINGLE CHARACTER MAINT. MODE DATA TEST
PRG4	SPECIAL BINARY COUNT MAINTENANCE MODE DATA TEST

2. REQUIREMENTS

2.1 EQUIPMENT

- A. PDP 11 SYSTEM
- B. DL11-E OR DL11-C OR DL11-D
- C. SPECIAL JUMPER CONNECTOR H315 (SEE DL11 MAINTENANCE MANUAL FOR DETAILED DESCRIPTION) IF DL11-E.

2.2 STORAGE

THIS PROGRAM USES ALL OF CORE (4K) EXCEPT THAT AREA RESERVED FOR THE BOOTSTRAP AND ABSOLUTE LOADERS.

3. LOADING PROCEDURE

THE ABSOLUTE LOADER IS USED TO LOAD THE PROGRAM.

4. USE PROCEDURE

THIS PROGRAM HAS BEEN MODIFIED TO RUN WITH OR WITHOUT
A CONSOLE PROCESSOR.
IF A CONSOLE MACHINE IS USED; THEN THE PROGRAM
LOOKS AT THE HARDWARE SWITCH REGISTER.
IF A CONSOLE-LESS MACHINE IS USED; THEN THE PROGRAM
AUTOMATICALLY LOOKS AT THE CONTENTS OF LOCATION
SOFTSR (176) AS A SWITCH REGISTER.

IT'S THE RESPONSIBILITY OF THE OPERATOR TO SET UP
THIS LOCATION PRIOR TO STARTING THE PROGRAM.

BEFORE STARTING ANY OF THE SELECTABLE PROGRAMS MAKE SURE
THAT THE TTY IS IN REMOTE MODE; AND THAT THE PROGRAM SELECTED
IS A LEGAL PROGRAM, IE. NO. 0-4, OTHERWISE AN ERROR MESSAGE
WILL OCCUR. TERMINATE ALL INPUTS WITH A CARRIAGE RETURN.

A MAP OF DEVICES PRESENT WILL BE TYPED AT RUN TIME. THIS MAP WILL NOT
BE TYPED OUT AGAIN UNLESS THE PROGRAM IS
RESTARTED AT LOCATION 200. A RESTART FROM THIS LOCATION WILL CAUSE
THE MAP OF DEVICES TO BE TYPED OUT AGAIN AND THEN A NORMAL START
WILL OCCUR.

4.1 PRGO INPUT/OUTPUT LOGIC TESTS

- A. LOAD ADDRESS = 000200 (RESTART LOAD ADDR. = 000204)
TYPE PROGRAM NUMBER = 0.
THE DIAGNOSTIC WILL IDENTIFY THE PROGRAM YOU SELECTED.
DISCONNECT THE DL11-E FROM THE MODEM AND INSERT THE JUMPER CON-
NECTOR IN THE MODEM END OF THE CABLE, AND PRESS CONTINUE.
NOTE, IF THE CABLE IS LEFT CONNECTED TO THE MODEM THE FOL-
LOWING TESTS WILL FAIL:
AT22, AT23, AT25, AT30, AT32, AT56
- B. THE PROGRAM WILL TYPE OUT INSTRUCTIONS TO SET IN THE DESIRED
SR OPTIONS. PRESS CONTINUE WHEN THE OPTIONS ARE IN THE SR.
THE AVAILABLE OPTIONS ARE:
SR 0-6 ROUTINE TO BE RUN (IF ENABLED BY SR9)
SR7 DISABLE STALL MODE
SR9 LOOP SELECTED ROUTINE
SR10 HALT AT END OF CURRENT TEST
SR11 INHIBIT ITERATION
SR12 SELECT LINE NUMBER AND LOCK ON IT
SR13 INHIBIT PRINTOUT
SR14 SCOPE
SR15 HALT ON ERROR.
- C. THE PROGRAM WILL NOW REQUEST THE LINE # (IF SR12=1) YOU WISH TO
TEST. TYPE THE LINE # AS REQUESTED, FOLLOWED BY A CARRIAGE RETURN.
LINE NUMBER REFERS TO THE ADDRESSES TO WHICH THE DL11-E RESPONDS.

LINE 00 77561X LINE 10 77571X LINE 20 77601X LINE 30 77611X

LINE 01 77562X	LINE 11 77572X	LINE 21 77602X	LINE 31 77612X
LINE 02 77563X	LINE 12 77573X	LINE 22 77603X	LINE 32 77613X
LINE 03 77564X	LINE 13 77574X	LINE 23 77604X	LINE 33 77614X
LINE 04 77565X	LINE 14 77575X	LINE 24 77605X	LINE 34 77615X
LINE 05 77566X	LINE 15 77576X	LINE 25 77606X	LINE 35 77616X
LINE 06 77567X	LINE 16 77577X	LINE 26 77607X	LINE 36 77617X
LINE 07 77570X	LINE 17 77600X	LINE 27 77610X	

- D. THE PROGRAM WILL NOW BEGIN TESTING THE DL11-E OR C/D YOU SELECTED.
ALL DL11'S WILL BE TESTED AUTOMATICALLY AND SEQUENTIALLY
UNLESS SR12 IS SELECTED.

NOTE: ALL LOGIC TESTS WILL NOT BE RUN AUTOMATICALLY.
THERE ARE TWO TESTS WHICH REQUIRE MANUAL INTERVENTION
WHICH ARE USED TO TEST THE SPEED SELECTION SWITCHES.
THESE ARE TESTS T34, T40. TO EXECUTE THESE TESTS USE SR9 AND
SR 0-6 TO SELECT THEM.

- E. REFER TO SECTION 5.1.2 FOR ERROR DESCRIPTION

- F. AFTER ONE COMPLETE PASS THE BELL WILL RING
FOLLOWED BY 'END PASS = ' WITH THE NUMBER OF
PASSES COMPLETED SINCE PROGRAM LAST STARTED AND
THE DEVICE ADDRESS UNDER TEST AND ITS TRAP VECTOR.

4.2 PRG1 - TRANSMITTER SCOPE LOOP

- A. LOAD ADDRESS = 000200 (RESTART = 000204)
TYPE PROGRAM NUMBER = 1.
THE DIAGNOSTIC WILL IDENTIFY THE PROGRAM YOU SELECTED, AND
REQUEST THE LINE # YOU WISH TO TEST. TYPE THE LINE # AS RE-
QUESTED, FOLLOWED BY A CARRIAGE RETURN.
- B. THE PROGRAM WILL REQUEST A CHARACTER CODE, AND A DELAY
TIME. THE CHARACTER CODE IS THE DATA THE DL11-E WILL TRANSMIT
AND THE DELAY IS THE TIME ELAPSED BETWEEN SUCCESSIVE TRANS-
MISSIONS OF ONE CHARACTER.
- C. THE PROGRAM WILL RUN WITHOUT ERROR OR END TYPEOUTS.

4.3 PRG2 - RECEIVER SCOPE LOOP

- A. LOAD ADDRESS = 000200 (RESTART = 000204)
TYPE PROGRAM NUMBER = 2.
THE DIAGNOSTIC WILL IDENTIFY THE PROGRAM YOU SELECTED, AND
REQUEST THE LINE # YOU WISH TO TEST. TYPE THE LINE # AS REQ-
UESTED, FOLLOWED BY A CARRIAGE RETURN.
- B. THE PROGRAM WILL REQUEST A TEST CHARACTER CODE, AND A DELAY
TIME. THE CHARACTER CODE IS THE DATA THAT THE DL11-E WILL BE
TRANSMITTING AND THE DELAY IS THE ELAPSED TIME BETWEEN SUCCES-
SIVE CHARACTERS.
- C. THE PROGRAM WILL NOW RUN WITHOUT ERROR OR END TYPEOUTS.

4.4 PRG3 - SINGLE CHARACTER MAINT MODE DATA TEST

- A. LOAD ADDRESS = 000200 (RESTART = 000204)
TYPE PROGRAM NUMBER = 3.
THE DIAGNOSTIC WILL IDENTIFY THE PROGRAM YOU SELECTED, AND
REQUEST THE LINE # YOU WISH TO TEST. TYPE THE LINE # AS REQ-
UESTED, FOLLOWED BY A CARRIAGE RETURN.
- B. THE PROGRAM WILL REQUEST A TEST CHARACTER. TYPE THE TEST CHAR-
ACTER, FOLLOWED BY A CARRIAGE RETURN.
- C. THE PROGRAM WILL NOW RUN CONTINUOUSLY REPORTING ANY DATA FAIL-
URES.

4.5 PRG4 - SPECIAL BINARY COUNT MAINT. MODE DATA TEST

- A. LOAD ADDRESS = 000200
TYPE PROGRAM NUMBER = 4.
THE DIAGNOSTIC WILL IDENTIFY THE PROGRAM YOU SELECTED, AND
REQUEST THE LINE # YOU WISH TO TEST. TYPE THE LINE # AS REQ-
UESTED, FOLLOWED BY A CARRIAGE RETURN.
- B. THE PROGRAM WILL BEGIN TESTING THE LINE YOU SELECTED.
AND REPORT ANY DATA ERRORS.

5. PROGRAM DESCRIPTIONS

5.1 PRG0 - INPUT/OUTPUT LOGIC TESTS

THE INPUT/OUTPUT LOGIC TESTS CONSIST OF 57(8) ROUTINES WHICH
MAY BE RUN IN SEQUENTIAL ORDER OR INDIVIDUALLY LOOPED (SEE
SECT 4.1, C FOR SWITCH SETTINGS). THE JUMPER CONNECTOR MUST
BE INSERTED BEFORE STARTING IF DL11-E.

5.1.1 ROUTINE DESCRIPTIONS

ROUTINE	TESTS
AT0-AT3 AT4-AT27	ADDRESSABILITY OF CSRS & DBRS DIDDLES ALL BITS IN THE CSRS AND CHECKS THAT THEY CAN BE READ/WRITTEN PROPERLY.
AT31-AT32 AT33 AT34	PROPER OPERATION OF RESET INSTRUCTION PROPER OPERATION OF READY BIT PROPER OPERATION OF TRANSMIT SPEED SELECTION
AT35-AT37	PROPER OPERATION OF DONE BIT
AT40	PROPER OPERATION RECEIVER SPEED SELECT
AT41	PROPER OPERATION OF DATA OVERRUN

AT42-AT52	PROPER OPERATION OF INTERRUPTS
AT53	READING RXCSR DOES NOT CLEAR DONE
AT54	ERROR CAUSES INTERRUPT
AT55	DATA TEST MAINTENANCE MODE
AT56	DATA TEST WITH JUMPER
AT57	PROPER OPERATION OF BREAK BIT

5.1.2 ERROR DESCRIPTION

IF A ROUTINE FAILS AND THE INHIBIT PRINTOUT SWITCH IS NOT
ENABLED (SR13) A PRINTOUT RESULTS. THE PRINTOUT FORMAT IS:

T(ROUTINE#) PC=(PC OF ERROR CALL) RXCSR=(ADDRESS OF DEVICE UNDER TEST)
AND AN ADDITIONAL/MESSAGE (IF APPLICABLE)

T005 PC=XXXX RXCSR=XXXX

T122 PC=XXXX RXCSR=XXXX DATA S/B:---WAS:---
INDICATING A DATA ERROR

TO RESUME TESTING PRESS CONTINUE.
IF THE VECTOR PROVIDED BY THE INTERRUPTING DL11-E IS INCORRECT
A TRAP TO THE WRONG LOCATION WILL OCCUR AND AN ERROR MESSAGE
WILL OCCUR.

5.1.3 JUMPER CONNECTOR

THE JUMPER CONNECTOR TESTS THOSE F/F'S, GATES (RING INDICATOR,
CARRIER TRANSITION, CLEAR TO SEND, AND SUPERVISORY RECEIVE
DATA) WHICH CANNOT BE TESTED UNLESS A DATA SET IS ACTUALLY
CONNECTED TO THE DL11-E. IN ADDITION TO TESTING DL11-E LOGIC
THE JUMPER ALSO TESTS CABLE WIRING TO/FROM THE DL11-E/DATA
SET. THE FOLLOWING TESTS WILL FAIL IF THE CABLE IS NOT
INSTALLED IN THE DL11-E:

AT22,AT23,AT25,AT30,AT32,AT56

5.2 PRG1-TRANSMITTER SCOPE LOOP

THE PURPOSE OF PRG1 IS TO ALLOW SCOPING OF TRANSMITTER
FUNCTIONS IN A RUN CONDITION USING USER SPECIFIED DL11-E
PARAMETERS AND DATA. NO ERROR PRINTOUTS ARE PROVIDED.

5.3 PRG2-RECEIVER SCOPE LOOP

THE PURPOSE OF PRG2 IS TO ALLOW SCOPING OF RECEIVER FUNCTIONS
IN A RUN CONDITION USING USER SPECIFIED DL11-E PARAMETERS
AND DATA. NO ERROR PRINTOUTS ARE PROVIDED.

5.4 PRG3-SINGLE CHARACTER MAINT MODE DATA TEST

PRG3 TRANSMITS, RECEIVES AND CHECKS RECEIVED DATA USING USER
SPECIFIED DL11-E PARAMETERS, AND DATA.

5.4.1 ERROR PRINTOUTS

SELF EXPLANATORY ERROR PRINTOUTS ARE PROVIDED.

5.5 PRG4-SPECIAL BINARY COUNT MAINT MODE DATA TEST

PRG4 IS THE SAME AS PRG0 ROUTINE 54 EXCEPT THAT
THE USER SPECIFIES DL11-E RUNNING PARAMETERS.

5.5.1 ERROR PRINTOUTS

SELF EXPLANATORY PRINTOUTS ARE PROVIDED.

6.0 POWER FAIL

A POWER FAIL ROUTINE IS INCLUDED IN THE PROGRAM. WHEN THE POWER FAILS
THE PROGRAM WILL AUTOMATICALLY RESTART USING THE PRESENT SR OPTIONS
AND THE LINE PREVIOUSLY SELECTED. NOTE: THE POWER MAY FAIL WHEN THE
PROGRAM IS EXECUTING A 'RESET' INSTRUCTION, IN THIS CASE OPERATOR
INTERVENTION IS NEEDED TO PRESS CONTINUE. AN ERROR TYPEOUT RESULTS
AND WILL TYPE THE PROGRAM #, THE ROUTINE THAT WAS RUNNING AT THE TIME
THE POWER FAILED (PROGRAM 0 ONLY), AND THE PC OF THE POWER FAIL ER-
ROR CALL.

RECOVERED FROM POWER FAILURE.
P(PRG#) T(ROUTINE #) PC = (ADDRESS OF ERROR CALL)
.ENDR

```
375 .LIST SEQ,BIN
376 .ENABLE ABS,AMA
377
378 ;DL11-E,C/D DIAGNOSTIC PROGRAM (OFF LINE TESTS)
379 ;
380 ;PRG0- INPUT-OUTPUT LOGIC TESTS
381 ;PRG1- TRANSMITTER SCOPE LOOP
382 ;PRG2- RECEIVER SCOPE LOOP
383 ;PRG3- SINGLE CHARACTER MAINTENANCE MODE DATA TEST
384 ;PRG4- SPECIAL BINARY COUNT MAINTENANCE MODE DATA TEST
385 ;
386 ;STANDARD SR SWITCH OPTIONS (SWITCH SET TO A 1 )
387 ;
388 ;SR15- HALT ON ERROR
389 ;SR14- SCOPE.
390 ;SR13- INHIBIT PRINTOUT
391 ;SR12- SELECT LINE NUMBER AND LOCK ON IT
```

```
392      ;SR11- INHIBIT ITERATION.
393      ;SR10- HALT AT END CURRENT TEST, TEST NO. IN DATA LIGHTS
394      ;SR9- SELECT ROUTINE.
395      ;SR7- DISABLE STALL MODE AND RUN FULL SPEED.
396      ;SR6 THROUGH SRO - NUMBER OF ROUTINE TO BE SELECTED.
397      ;
398      ;STANDARD CONFIGURATION
399      ;CHARACTER LENGTH 8
400      ;STOP CODE 2
401      000000      .-0
402      000000      0C,706      ERTIP      ;UNASSIGNED TRAP
403      000002      000000      0
404      000004      005706      MACHER: ERTIP      ;SP OVERFLOW, BUS ERROR TRAP
405      000006      000040      40
406      000010      005706      ERTIP      ;RESERVED INSTRUCTION TRAP
407      000012      000100      100
408      000014      005706      ERTIP      ;TRACE TRAP
409      000016      000140      140
410      000020      006014      MAPVEC      ;TRAP TO MAP VECTOR
411      000022      000340      PRTY7
412      000024      006234      PFAIL      ;POWER FAIL TRAP
413      000026      000340      PRTY7
414      000030      002766      EMTINT      ;EMT TRAP
415      000032      000340      PRTY7
416      000034      005706      ERTIP
417      000036      000340      340
418      000040      000042      .+2
419      000042      000000      HALT
420      000044      000046      .-46
421      000046      005312      LOGIC
422      000165      .REPT      117.
423      .+2      ;TRAP TO TRAP REPORTER
424      4
425      .ENDR
426
427
428      ;EQUATE STATEMENTS
429      177776      PSW=177776
430      001176      SPBOT=1176
431      000240      NOP=240
432      000000      OPEN=0
433      100000      MANUAL=BIT15
434      100000      BIT15=100000
435      040000      BIT14=40000
436      020000      BIT13=20000
437      010000      BIT12=10000
438      004000      BIT11=4000
439      002000      BIT10=2000
440      001000      BIT9=1000
441      000400      BIT8=400
442      000200      BIT7=200
443      000100      BIT6=100
444      000040      BIT5=40
445      000020      BIT4=20
446      000010      BIT3=10
447      000004      BIT2=4
```

```
448      000002      BIT1=2
449      000001      BIT0=1
450      005726      POPSP=5726      ;POP THE STACK. SAME AS TST (6)+
451      022626      POPSP2=022626      ;POP STACK TWICE. SAME AS CMP (6)+,(6)+
452      000340      PRTY7=340      ;PRIORITY LEVEL DEFINITIONS
453      000300      PRTY6=300
454      000240      PRTY5=240
455      000200      PRTY4=200
456      000140      PRTY3=140
457      000100      PRTY2=100
458      000040      PRTY1=40
459      000000      PRTY0=0
460      104000      TYPE=EMT+0
461      104001      TYPES=EMT+1
462      104002      STALL=EMT+2
463      104003      ERROR=EMT+3
464      104004      DATCHK=EMT+4
465      104005      CHALT=EMT+5
466      104006      STRXV=EMT+6
467      104007      STTXV=EMT+7
468      104010      EHALT=EMT+10
469      104011      SRESET=EMT+11
470      104012      SCOPE=EMT+12
471      104013      SAVREG=EMT+13
472      104014      RSTREG=EMT+14
473      104015      ERROR1=EMT+15
474      104016      DELAY=EMT+16
475      104017      TIMERX=EMT+17
476      104020      TIMETX=EMT+20
477      177777      ATLAST=-1
478      100000      CD=100000      ;FLAG FOR C/D TESTS
479
480      .LIST      ME
481      .=174
482      000174      177570      SRPTR: 177570
483      000176      000000      SOFTSR: 000000
484      000200      .=200
485      000200      000137      001640      JMP      @#STARTZ      ;GO TO START OF PROGRAM.
486      000204      000204      .=204
487      000204      000137      006414      JMP      @#RESTART
488      001200      .=1200
489
490      ;
491      ;DEVICE ADDRESS LIST
492      ;LSB BIT0 IS SET TO A 1 BY MAPPER IF DEVICE NOT FOUND
493      ;TO TEST THAT LINE NOT FOUND CLEAR BIT0 IN THAT DEVICE ADDRESS
494      ;IN THIS TABLE AFTER MAPPING DONE
495      ;*****
495      001200      175610      RXCR0: 175610      ;LINE 0 DEVICE ADDRESS (RXCSR)
496      001202      175620      RXCR1: 175620      ;LINE 1 DEVICE ADDRESS (RXCSR)
497      001204      175630      RXCR2: 175630      ;LINE 2 DEVICE ADDRESS (RXCSR)
498      001206      175640      RXCR3: 175640      ;LINE 3 DEVICE ADDRESS (RXCSR)
499      001210      175650      RXCR4: 175650      ;LINE 4 DEVICE ADDRESS (RXCSR)
500      001212      175660      RXCR5: 175660      ;LINE 5 DEVICE ADDRESS (RXCSR)
501      001214      175670      RXCR6: 175670      ;LINE 6 DEVICE ADDRESS (RXCSR)
502      001216      175700      RXCR7: 175700      ;LINE 7 DEVICE ADDRESS (RXCSR)
503      001220      175710      RXCR10: 175710      ;LINE 10 DEVICE ADDRESS (RXCSR)
```

```
504 001222 175720 RXCR11: 175720 ;LINE 11 DEVICE ADDRESS (RXCSR)
505 001224 175730 RXCR12: 175730 ;LINE 12 DEVICE ADDRESS (RXCSR)
506 001226 175740 RXCR13: 175740 ;LINE 13 DEVICE ADDRESS (RXCSR)
507 001230 175750 RXCR14: 175750 ;LINE 14 DEVICE ADDRESS (RXCSR)
508 001232 175760 RXCR15: 175760 ;LINE 15 DEVICE ADDRESS (RXCSR)
509 001234 175770 RXCR16: 175770 ;LINE 16 DEVICE ADDRESS (RXCSR)
510 001236 176000 RXCR17: 176000 ;LINE 17 DEVICE ADDRESS (RXCSR)
511 001240 176010 RXCR20: 176010 ;LINE 20 DEVICE ADDRESS (RXCSR)
512 001242 176020 RXCR21: 176020 ;LINE 21 DEVICE ADDRESS (RXCSR)
513 001244 176030 RXCR22: 176030 ;LINE 22 DEVICE ADDRESS (RXCSR)
514 001246 176040 RXCR23: 176040 ;LINE 23 DEVICE ADDRESS (RXCSR)
515 001250 176050 RXCR24: 176050 ;LINE 24 DEVICE ADDRESS (RXCSR)
516 001252 176060 RXCR25: 176060 ;LINE 25 DEVICE ADDRESS (RXCSR)
517 001254 176070 RXCR26: 176070 ;LINE 26 DEVICE ADDRESS (RXCSR)
518 001256 176100 RXCR27: 176100 ;LINE 27 DEVICE ADDRESS (RXCSR)
519 001260 176110 RXCR30: 176110 ;LINE 30 DEVICE ADDRESS (RXCSR)
520 001262 176120 RXCR31: 176120 ;LINE 31 DEVICE ADDRESS (RXCSR)
521 001264 176130 RXCR32: 176130 ;LINE 32 DEVICE ADDRESS (RXCSR)
522 001266 176140 RXCR33: 176140 ;LINE 33 DEVICE ADDRESS (RXCSR)
523 001270 176150 RXCR34: 176150 ;LINE 34 DEVICE ADDRESS (RXCSR)
524 001272 176160 RXCR35: 176160 ;LINE 35 DEVICE ADDRESS (RXCSR)
525 001274 176170 RXCR36: 176170 ;LINE 36 DEVICE ADDRESS (RXCSR)
526 001276 177777 XORADD: 177777 ;LINE 37 SPECIAL ADDRESS FOR XOR
527 001300 177777 RXEND: 177777 ;LINE XX DEVICE ADDRESS (RXCSR)
528
529 ;
530 ; CHARACTER LENGTH, PRIORITY, C/D MASK
531 ; INITIALLY SET FOR DL11-E, PRIORITY=4, CHARACTER LENGTH=8
532 ; BIT 15 SET TO A 1 = THAT LINE HAS DL11-C OR DL11-D
533 ; EX: 140377 = DL11C OR DL11D, PRIORITY = 4, CHARACTER LENGTH = 8
534 ; BITS 12-14 = PRIORITY LEVEL THAT LINE
535 ; BITS 0-7 = CHARACTER MASK EX. 377=8, 177=7, 77=6, 37=5
536 ; *****
536 001302 040377 CMAS0: 040377 ;LINE 0 CHARACTER MASK, PRIORITY, C/D FLAG
537 001304 040377 CMAS1: 040377 ;LINE 1 CHARACTER MASK, PRIORITY, C/D FLAG
538 001306 040377 CMAS2: 040377 ;LINE 2 CHARACTER MASK, PRIORITY, C/D FLAG
539 001310 040377 CMAS3: 040377 ;LINE 3 CHARACTER MASK, PRIORITY, C/D FLAG
540 001312 040377 CMAS4: 040377 ;LINE 4 CHARACTER MASK, PRIORITY, C/D FLAG
541 001314 040377 CMAS5: 040377 ;LINE 5 CHARACTER MASK, PRIORITY, C/D FLAG
542 001316 040377 CMAS6: 040377 ;LINE 6 CHARACTER MASK, PRIORITY, C/D FLAG
543 001320 040377 CMAS7: 040377 ;LINE 7 CHARACTER MASK, PRIORITY, C/D FLAG
544 001322 040377 CMAS10: 040377 ;LINE 10 CHARACTER MASK, PRIORITY, C/D FLAG
545 001324 040377 CMAS11: 040377 ;LINE 11 CHARACTER MASK, PRIORITY, C/D FLAG
546 001326 040377 CMAS12: 040377 ;LINE 12 CHARACTER MASK, PRIORITY, C/D FLAG
547 001330 040377 CMAS13: 040377 ;LINE 13 CHARACTER MASK, PRIORITY, C/D FLAG
548 001332 040377 CMAS14: 040377 ;LINE 14 CHARACTER MASK, PRIORITY, C/D FLAG
549 001334 040377 CMAS15: 040377 ;LINE 15 CHARACTER MASK, PRIORITY, C/D FLAG
550 001336 040377 CMAS16: 040377 ;LINE 16 CHARACTER MASK, PRIORITY, C/D FLAG
551 001340 040377 CMAS17: 040377 ;LINE 17 CHARACTER MASK, PRIORITY, C/D FLAG
552 001342 040377 CMAS20: 040377 ;LINE 20 CHARACTER MASK, PRIORITY, C/D FLAG
553 001344 040377 CMAS21: 040377 ;LINE 21 CHARACTER MASK, PRIORITY, C/D FLAG
554 001346 040377 CMAS22: 040377 ;LINE 22 CHARACTER MASK, PRIORITY, C/D FLAG
555 001350 040377 CMAS23: 040377 ;LINE 23 CHARACTER MASK, PRIORITY, C/D FLAG
556 001352 040377 CMAS24: 040377 ;LINE 24 CHARACTER MASK, PRIORITY, C/D FLAG
557 001354 040377 CMAS25: 040377 ;LINE 25 CHARACTER MASK, PRIORITY, C/D FLAG
558 001356 040377 CMAS26: 040377 ;LINE 26 CHARACTER MASK, PRIORITY, C/D FLAG
559 001360 040377 CMAS27: 040377 ;LINE 27 CHARACTER MASK, PRIORITY, C/D FLAG
```

560	001362	040377	CMAS30: 040377	;LINE 30 CHARACTER MASK, PRIORITY, C/D FLAG
561	001364	040377	CMAS31: 040377	;LINE 31 CHARACTER MASK, PRIORITY, C/D FLAG
562	001366	040377	CMAS32: 040377	;LINE 32 CHARACTER MASK, PRIORITY, C/D FLAG
563	001370	040377	CMAS33: 040377	;LINE 33 CHARACTER MASK, PRIORITY, C/D FLAG
564	001372	040377	CMAS34: 040377	;LINE 34 CHARACTER MASK, PRIORITY, C/D FLAG
565	001374	040377	CMAS35: 040377	;LINE 35 CHARACTER MASK, PRIORITY, C/D FLAG
566	001376	040377	CMAS36: 040377	;LINE 36 CHARACTER MASK, PRIORITY, C/D FLAG
567	001400	040377	CMAS37: 040377	;LINE 37 SPECIAL ADDRESS FOR XOR
568			:	
569	001402	000000	UMASK: 0	;MASK FOR DEVICE UT
570	001404	000000	RMASK: 0	;MASK FOR CHAR LENGTH FOR DEVICE UT
571	001406	177740	STLMSK: 177740	;MASK FOR MAX RANDOM STALL
572			:	
573	001410	000000	RXCSR: 0	;RECEIVER UNDER TEST
574	001412	000000	RXBUF: 0	;RECEIVER BUFFER UNDER TEST
575	001414	000000	TXCSR: 0	;TRANSMITTER CSR UNDER TEST
576	001416	000000	TXBUF: 0	;TRANSMITTER BUFFER UNDER TEST
577	001420	000000	RXVTR: 0	;RECEIVER VECTOR UNDER TEST
578	001422	000000	RXLVL: 0	;RECEIVER PRIORITY LEVEL UT
579	001424	000000	TXVTR: 0	;TRANSMITTER VECTOR UNDER TEST
580	001426	000000	TXLVL: 0	;TRANSMITTER PRIORITY LEVEL UT
581			;*****	
582			:	
583	001430	177560	TKS: 177560	;LSR CSR
584	001432	177562	TKB: 177562	;LSR BUFFER
585	001434	177564	TPS: 177564	;LSP CSR
586	001436	177566	TPB: 177566	;LSP BUFFER
587	001440	000060	TKVTR: 60	;LSR INTERRUPT VECTOR
588	001442	000200	TKLVL: PRTY4	;LSR PRIORITY LEVEL
589	001444	000064	TPVTR: 64	;LSP INTERRUPT VECTOR
590	001446	000200	TPLVL: PRTY4	;LSP PRIORITY LEVEL
591	001450	000000	PRGNUM: OPEN	;CONTAINS CURRENT PROGRAM#
592	001452	000000	KSTART: OPEN	;CURRENT PROGRAM START ADDRESS.
593	001454	000000	CURTST: OPEN	;CONTAINS ADDR OF CURRENT TEST.
594	001456	000000	RTNNO: OPEN	;CONTAINS CURRENT TEST #.
595	001460	000000	TNNO: 0	;CONTAINES EDITED TNUM
596	001462	000000	NXTST: OPEN	;CONTAINS ADDR OF NEXT TEST.
597	001464	000000	ICTR: OPEN	;CONTAINS CURRENT ITERATION COUNT
598	001466	000000	SCOPTR: OPEN	;CONTAINS CURRENT SCOPE POINTER.
599	001470	000000	OLDPS: 0	;PS SAVED FROM TRAP TO EMT ROUTINE
600	001472	000000	FMAP: 0	;MAPPING FLAG, 1= MAPPING IN PROGRESS
601	001474	006446	PRGTAB: PRG0	;PRG0 START ADDRESS
602	001476	014522	PRG1	;PRG1 START ADDRESS
603	001500	014574	PRG2	;PRG2 START ADDRESS
604	001502	014672	PRG3	;PRG3 START ADDRESS
605	001504	014732	PRG4	;PRG4 START ADDRESS
606	001506	005110	INCRPG	;INCORRECT PROGRAM SELECTED
607	001510	005110	INCRPG	
608	001512	005110	INCRPG	
609	001514	003342	EMTTAB: TYP	;POINTER TO TYPEOUT ROUTINE
610	001516	003464	TYP5	;POINTER TO CHAINED MESSAGES ROUTINE
611	001520	003774	STAL	;POINTER TO RANDOM STALL ROUTINE
612	001522	005516	ERR	;POINTER TO ERROR ROUTINE
613	001524	005424	DTCHK	
614	001526	000000	OPEN	
615	001530	003120	STLSRV	

```
616 001532 003154          STLSVP
617 001534 005362          EHLT                                ;POINTER TO ERROR HALT ROUTINE.
618 001536 003210          SRSETT
619 001540 002540          CHAINN
620 001542 003020          SAVRG
621 001544 003060          RSTRG
622 001546 005540          ERR1
623 001550 003726          DLY
624 001552 004044          TMRX
625 001554 004054          TMTX
626
627 001556 000000          :
628 001560 000000          CRBUF: OPEN
629 001562 000000          CRBUFA: OPEN
630 001564 000000          CRBUFB: OPEN
631 001566 000000          CTR0: OPEN
632 001570 000000          CTR1: OPEN
633 001572 000000          CTR2: OPEN
634 001574 000000          CTR3: OPEN
635 001576 000000          CTR4: OPEN
636 001600 000000          CTR5: OPEN
637 001602 000000          CTR6: OPEN
638 001604 000000          CTR7: OPEN
639 001606 000000          TXCSRT: OPEN
640 001610 000000          RXCSRT: OPEN
641 001612 000000          RXBUFT: OPEN
642 001614 000000          FOUNOV 0
643 001616 000000          LINENO: 0
644 001620 000000          TEMP: OPEN
645 001622 000000          TEMP1: 0
646 001624 000000          TEMP2: 0
647 001626 000000          COUNT: 0
648 001630 000000          FTITLE: 0
649 001632 000000          FNONE: 0
650 001634 000000          TOPC: 0
651 001636 000000          FROMPC: 0
652 001640 012706 001176    STARTZ: MOV      #SPBOT,%6
653 001644 013746 000006    MOV      6,-(SP)                ;SAVE CURRENT VECTOR
654 001650 013746 000004    MOV      4,-(SP)
655 001654 012737 001670 000004    MOV      #15,4                ;SET UP TIME OUT VECTOR
656 001662 005777 176306    TST      @SRPTR                ;TRY TO REFERENCE THE
657                                     ;HARDWARE SWITCH REGISTER
658 001666 000404          BR      2$                        ;BRANCH IF NO TIME OUT TRAP OCCURRS
659 001670 012737 000176 000174 1$: MOV      #SOFTSR,SRPTR    ;CHANGE THE SWITCH REGISTER POINTER
660                                     ;TO POINT TO A SOFTWARE SWITCH REGISTER
661 001676 022626          CMP      (6)+,(6)+                ;RESTORE THE STACK
662 001700 012637 000004    2$: MOV      (6)+,4                ;RESTORE TIME OUT VECTOR
663 001704 012637 000006    MOV      (6)+,6
664 001710 005037 001626    CLR      @#FTITLE
665 001714 013746 000004    MOV      @#4,-(%6)
666 001720 012737 002020 000004    MOV      #XORA,@#4
667 001726 005737 177060    TST      @#177060
668 001732 012637 000004    MOV      (%6)+,@#4
669 001736 012737 174000 001276    MOV      #174000,@#XORADD
670 001744 012737 177777 002006    MOV      #-1,@#XORFLG
671 001752 104000          TYPE
```

.MAIN. MACY11 30A(1052) 30-MAR-78 08.52 PAGE 13
CZDLA.G.P11 30-MAR-78 08:51

SEQ 0013

```

672 001754 001762          MESS1
673 001756 000137 002044    JMP      @#START
674 001762 005015 047531 020125 MESS1: .ASCII  <15><12>'YOU ARE ON AN XOR TESTER@'
675 001770 051101 020105 047117
676 001776 040440 020116 047530
677 002004 020122 042524 052123
678 002012 051105      100
679          002016
680 002016 000000          XORFLG: .EVEN
681          .WORD      0
682 002020 022626          XORA:  CMP      (%6,+,%6)+
683 002022 012637 000004          MOV      (%6)+,@#4
684 002026 012737 177777 001276          MOV      #-1,@#XORADD
685 002034 005037 002016          CLR      @#XORFLG
686 002040 000137 002044          JMP      @#START
687
688
689          .MACR      TSTAA  AX,B,C,D,E
690          ;*****
691          AT'E':  C          ;TEST NUMBER
692          AT'D'          ;ADDRESS OF NEXT TEST
693          B          ;ITERATION COUNT
694          'AX'A          ;SCOPE ENTRY POINT
695          X=X+1          ;
696          ;*****
697          .ENDM
698          .MACR      TSTA   B,AX,Z
699          TSTAA      AX,B, X+1+Z, X+2, X+1
700          .ENDM
701
702 002044 012706 001176          START:  MOV      #SPBOT,%6          ;SET BOTTOM OF SP STACK.
703 002050 012737 006234 000024    MOV      #PFAIL,24
704 002056 005037 001612          CLR      FOUNOV
705 002062 005037 001472          CLR      FMAP
706 002066 004737 003300          JSR      %7,CLRCO          ;CLEAR DEVICE UT PARAMETERS
707 002072 004737 003516          JSR      %7,OVRLAY          ;OVERLAY TRAP AREA
708 002076 005737 00 626          TST      FTITLE          ;TITLE PRINTED AND MAP MADE
709 002102 001054          BNE      START1          ;YES, SKIP OVER THIS
710 002104 104000          TYPE
711 002106 015044          MTIT
712 002110 005237 001626          INC      FTITLE
713 002114 005037 001630          CLR      FNONE          ;CLEAR DEVICE PRESENT FLAG
714 002120 012737 002160 000004    MOV      #MAPNE,MACHER          ;SET UP NO DEVICE PRESENT RETURN
715 002126 012704 001200          MOV      #RXCR0,%4          ;SET UP DEVICE POINTER
716 002132 021437 001300          MAPA:  CMP      (%4),@#RXEND          ;LAST DEVICE
717 002136 00 30          BEQ      MAPEND          ;YES, EXIT
718 002140 042,14 000001          BIC      #BIT0,(4)          ;CLEAR ODD ADDRESS
719 002144 005037 177776          CLR      PSW
720 002150 005774 000000          TST      @ (4)          ;TEST DEVICE
721 002154 000240          NOP
722 002156 000404          BR      MAPOK
723 002160 052724 000001          MAPNE:  BIS      #BIT0,(4)+          ;NOT LIVING
724 002164 022626          POPSP2
725 002166 000761          BR      MAPA
726 002170 012437 001620          MAPOK:  MOV      (4)+,TEMP1          ;SAVE DEVICE ADDRESS FOR TYPING
727 002174 004537 0,4474          JSR      %5,OACNV

```

728	002200	001620			TEMP1		
729	002202	015135			MDEVAD		
730	002204	000006			6		
731	002206	104000			TYPE		
732	002210	015135			MDEVAD		
733	002212	005237	001630		INC	FNONE	;SET HAVE DEVICE
734	002216	000745			BR	MAPA	
735	002220	012737	005706	000004	MAPEND: MOV	#ERTP,MACHER	;RESET TRAPS
736	002226	005737	001630		TST	FNONE	;ANY DEVICES PRESENT
737	002232	00142			BEQ	MAPERR	;NO, ERROR
738	002234	012701	001200		START1: MOV	#RXCRO,%1	
739	002240	032711	000001		START2: BIT	#BIT0,(1)	;IS DEVICE LIVING
740	002244	001013			BNE	START3	;NO, CHECK FOR END
741	002246	010137	001614		MOV	%1,LINENO	;CALCULATE LINE NUMBER UNDER TEST
742	002252	162737	001200	001614	SUB	#RXCRO,LINENO	
743	002260	006237	001614		ASR	LINENO	
744	002264	011101			MOV	(1),%1	;YES, LOAD AND EXIT
745	002266	004737	006072		JSR	%7,FORMAD	
746	002272	000420			BR	START4	
747	002274	005721			START3: TST	(1)+	
748	002276	020127	001300		CMP	%1,#RXEND	;END OF TABLE
749	002302	001356			BNE	START2	;NO, LOOP
750	002304	104000			MAPERR: TYPE		
751	002306	015211			MNONE		
752	002310	005737	000042		TST	@#42	;MONITOR LOAD
753	002314	001402			BEQ	+.6	;NO, CONTINUE
754	002316	000137	005302		JMP	PRGXTL	;YES, EXIT
755	002322	005037	001626		CLR	FTITLE	
756	002326	000000			HALT		
757	002330	000137	002044		JMP	START	
758	002334	012737	000001	001636	START4: MOV	#1,PASCNT	
759	002342	005037	177776		CLR	PSW	
760	002346	005037	001456		CLR	RTNNO	
761	002352	104000			TYPE		;CALL FOR PROGRAM NUMBER.
762	002354	015155			PGMSG		
763	002356	004737	003554		JSR	PC,RDOCT	;READ IN PROGRAM NUMBER.
764	002362	012600			MOV	(SP)+,%0	;INPUT DATA TO R0
765	002364	042700	177770		BIC	#177770,%0	;LIMIT (SR) TO BITS 3-0
766	002370	010037	001450		MOV	%0,PRGNUM	;SAVE PROGRAM #
767	002374	006300			ASL	%0	
768	002376	000170	001474		JMP	@PRGTAB(0)	;GO TO SELECTED PROGRAM.
769							
770	002402	013737	001452	001462	GETRDY: MOV	KSTART,NXTST	;ADDR OF 1ST ROUTINE TO NXTST
771	002410	012737	005706	000004	GTRDYX: MOV	#ERTP,MACHER	;RESET MACHER TRAP.
772	002416	012737	000040	000006	MOV	#40,MACHER+2	
773	002424	005037	001472		CLR	FMAP	
774	002430	012706	001176		MOV	#SPBOT,%6	;SET BOTTOM OF STACK.
775	002434	104011			SRESET		;ISSUE RESET.
776	002436	005037	177776		CLR	PSW	
777	002442	004737	002734		JSR	%7,FORWD	;ROLL FORWARD TO 'NEXT' ROUTINE.
778	002446	032777	001000	175520	GTRDYA: BIT	#BIT9,@SRPTR	;CHECK SELECT ROUTINE SWITCH
779	002454	001011			BNE	GTRDYC	;BRANCH IF SELECT ROUTINE SWITCH IS SET.
780	002456	005737	001402		TST	UMASK	;C/D DEVICE
781	002462	100003			BPL	GTRDA1	;NO, CONTINUE
782	002464	005737	001456		TST	RTNNO	;THIS A C/D TEST
783	002470	100364			BPL	GTRDYA	;NO, DO NEXT TEST

MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 15
CZDLA.G.P11 30-MAR-78 08:51

SEQ 0015

```

784 002472 000177 176756      GTRDA1: JMP      @CURTST      ;GO RUN CURRENT ROUTINE.
785 002476 000464              BR      CHNB              ;NO GO. MANUAL RTN BYPASSED.
786 002500 017700 175470      GTRDYC: MOV      @SRPTR,%0      ;(SR) TO R0
787 002504 042700 177600              BIC      #177600,%0      ;MASK UNDESIRED BITS
788 002510 123700 001456              CMPB     RTNNO,%0      ;COMPARE RTNNO TO (R0)
789 002514 001002              BNE      GTRDYD      ;BRANCH IF ROUTINE NOT FOUND YET.
790 002516 000177 176732              JMP      @CURTST      ;GO RUN ROUTINE.
791 002522 022737 177777 001462 GTRDYD: CMP      #-1,NXTST      ;NO. CHECK FOR LAST ROUTINE.
792 002530 001344              BNE      GTRDYA      ;BRANCH IF NOT LAST ROUTINE.
793 002532 004737 005100              JSR      %7,INCRTN      ;YES. INCORRECT ROUTINE SELECTED.
794 002536 000721              BR      GETRDY      ;START OVER.
795
796 002540 032777 040000 175426 CHAINN: BIT      #BIT14,@SRPTR      ;CHECK FOR SCOPE OPTION.
797 002546 001403              BEQ      CHNA              ;BRANCH IF SCOPE SW NOT SET.
798 002550 013716 001466      CHNAB: MOV      SCOPTR,%6      ;SET UP TO RETURN TO ROUTINE.
799 002554 000002              RTI              ;RETURN TO ROUTINE.
800 002556 005737 002016      CHNA:  TST      @#XORFLG
801 002562 100011              BPL      1$
802 002564 013746 000004              MOV      @#4,-(%6)
803 002570 012737 002676 000004              MOV      #XOR,@#4
804 002576 005737 177060              TST      @#177060      ;TEST FOR XOR
805 002602 012637 000004              MOV      (%6)+,@#4
806 002606 032777 004000 175360 1$:  BIT      #BIT11,@SRPTR      ;TEST INHIBIT ITERATION SWITCH
807 002614 001003              BNE      CHNAA      ;BRANCH IF INHIBIT ITERATION SW SET.
808 002616 005337 001464              DEC      ICTR      ;DECREMENT ITERATION COUNT.
809 002622 001352              BNE      CHNAB      ;BRANCH IF COUNT NOT 0.
810 002624 022626              CHNAA: POPSP2      ;POP STACK TWICE
811 002626 032777 002000 175340      BIT      #BIT10,@SRPTR
812 002634 001405              BEQ      CHNB
813 002636 013700 001456              MOV      RTNNO,%0
814 002642 042700 100000              BIC      #BIT15,%0
815 002646 000000              HALT
816 002650 032777 001000 175316 CHNB:  BIT      #BIT9,@SRPTR      ;CHECK SELECT ROUTINE SWITCH
817 002656 001251              BNE      GETRDY      ;BRANCH IF SELECT RTN SW SET
818 002660 022737 177777 001462      CMP      #-1,NXTST      ;LAST TEST?
819 002666 001250              BNE      GTRDYX      ;BRANCH IF NOT LAST TEST.
820 002670 004737 005122              JSR      %7,PRGEND      ;PROGRAM END.
821 002674 000642              BR      GETRDY
822
823 002676 022626              XOR:  CMP      (%6)+,(%6)+
824 002700 012637 000004              MOV      (%6)+,@#4
825 002704 000721              BR      CHNAB
826
827      ;INIT FOR C/D - WITHOUT JUMPER RESET STARTS ASSEMBLING CHARACTER SETTING DONE
828      ;SET MAINT, DELAY, CLEAR RX DONE
829 002706 005737 001402      CDINIT: TST      UMASK      ;C-D DEVICE
830 002712 100007              BPL      CDINX      ;NO, EXIT
831 002714 052777 000004 176472      BIS      #BIT2,@TXCSR      ;SET MAINT BIT
832 002722 104016              DELAY      ;WAIT 1.5 SEC
833 002724 002734              1500.
834 002726 005777 176460              TST      @RXBUF      ;CLEAR RX DONE
835 002732 000207      CDINX:  RTS      %7
836
837      ;
838 002734 013705 001462      FORWD: MOV      NXTST,%5      ;ADDR OF NEXT ROUTINE TO R5.
839 002740 012537 001456              MOV      (5)+,RTNNO      ;GET NEXT ROUTINE NUMBER.

```

```
840 002744 012537 001462      MOV      (5)+,NXTST      ;GET ADDR OF NEXT 'NEXT' ROUTINE.
841 002750 012537 001464      MOV      (5)+,ICTR      ;GET ITERATION COUNT.
842 002754 012537 001466      MOV      (5)+,SCOPTR    ;GET SCOPE LOOP ENTRY POINTER.
843 002760 010537 001454      MOV      %5,CURTST    ;ADDR OF NOW CURRNT TEST TO CURTST.
844 002764 000207              RTS      %7      ;EXIT FORWD SUBROUTINE.
845
846 002766 011646              ;EMTINT: MOV      @%6,-(6)      ;GET SAVED PC.
847 002770 162716 000002      SUB      #2,@%6      ;DECREMENT PC BY 2.
848 002774 017616 000000      MOV      @(%6),@%6
849 003000 006316              EMTA:  ASL      @%6      ;EMT ARG X 2.
850 003002 042716 177001      BIC      #177001,@%6    ;REMOVE 7 MSB.
851 003006 062716 001514      ADD      #EMTTAB,@%6    ;FORM EMT RTN ADDR.
852 003012 017616 000000      MOV      @(%6),@%6
853 003016 000136              JMP      @(%6)+    ;GO TO EMT ROUTINE.
854
855              ;SAVE REGS 0 TO 4 SUBROUTINE.
856
857 003020 012637 003054      SAVRG:  MOV      (6)+,SVRPC      ;SAVE PC AND PSW.
858 003024 012637 003056      MOV      (6)+,SVRPSW
859 003030 010446              MOV      %4,-(6)      ;SAVE REGS 0 - 4
860 003032 010346              MOV      %3,-(6)      ;IN STACK.
861 003034 010246              MOV      %2,-(6)
862 003036 010146              MOV      %1,-(6)
863 003040 010046              MOV      %0,-(6)
864 003042 013746 003056      MOV      SVRPSW,-(6)    ;RESTORE PC AND PSW.
865 003046 013746 003054      MOV      SVRPC,-(6)
866 003052 000002              RTI
867 003054 000000              SVRPC:  OPEN
868 003056 000000              SVRPSW: OPEN
869
870              ;RESTORE REGS 0 TO 4 SUBROUTINE.
871
872 003060 012637 003114      RSTRG:  MOV      (6)+,RSTPC      ;SAVE PC AND PSW.
873 003064 012637 003116      MOV      (6)+,RSTPSW
874 003070 012600              MOV      (6)+,%0      ;RESTORE REGS 0 - 4
875 003072 012601              MOV      (6)+,%1      ;FROM STACK.
876 003074 012602              MOV      (6)+,%2
877 003076 012603              MOV      (6)+,%3
878 003100 012604              MOV      (6)+,%4
879 003102 013746 003116      MOV      RSTPSW,-(6)    ;RESTORE PC AND PSW.
880 003106 013746 003114      MOV      RSTPC,-(6)
881 003112 000002              RTI
882 003114 000000              RSTPC:  OPEN
883 003116 000000              RSTPSW: OPEN
884
885              ;ROUTINE TO SET RECEIVER INTERRUPT VECTOR AND PRIORITY
886 003120 004737 006270      STLSPV: JSR      %7,TSTVEC
887 003124 017637 000000      MOV      @(%6),STPRA+2    ;MOVE VECTOR ADDR TO STPRA+2
888 003132 062716 000002      ADD      #2,@%6      ;SET UP EXIT
889 003136 013701 001420      MOV      RXVTR,%1
890 003142 012721 000000      STPRA:  MOV      #OPEN,(1)+    ;SET VECTOR ADDRESS
891 003146 013721 001422      MOV      RXLVL,(1)+    ;SET PRIORITY
892 003152 000002              RTI
893
894              ;ROUTINE TO SET TRANSMITTER INTERRUPT VECTOR AND PRIORITY.
895 003154 004737 006270      STLSPV: JSR      %7,TSTVEC
```

```
896 003160 017637 000000 003200      MOV      @ (6),STPPA+2      ;MOVE VECTOR ADDR TO STPPA+2
897 003166 062716 000002              ADD      #2,@%6          ;SET UP EXIT
898 003172 013701 001424              MOV      TXVTR,%1
899 003176 012721 000000      STPPA:  MOV      #OPEN,(1)+      ;SET VECTOR ADDRESS.
900 003202 013721 001426              MOV      TXLVL,(1)+      ;SET PRIORITY
901 003206 000002              RTI                          ;EXIT.
902
903      ;ROUTINE TO ISSUE RESET.
904 003210 012700 052525      SRSETT: MOV      #52525,%0      ;DATA TO R0.
905 003214 005100              COM      %0              ;COMPLEMENT (R0).
906 003216 010037 003212              MOV      %0,SRSETT+2      ;(R0) TO SRSETT+2.
907 003222 000005              RESET          ;ISSUE RESET. (R0) IS
908 003224 000002              RTI                          ;DISPLAYED. EXIT.
909
910      ;RANDOM NUMBER GENERATOR. ROUTINE EXITS WITH NUMBER IN REGISTER 0.
911 003226 013700 003274      RNGEN:  MOV      RP1,%0
912 003232 006100              ROL      %0
913 003234 006100              ROL      %0
914 003236 063700 003276              ADD      RP2,%0
915 003242 010037 003274              MOV      %0,RP1
916 003246 006100              ROL      %0
917 003250 006100              ROL      %0
918 003252 063700 003276              ADD      RP2,%0
919 003256 006100              ROL      %0
920 003260 006100              ROL      %0
921 003262 010037 003276              MOV      %0,RP2
922 003266 013700 003274              MOV      RP1,%0
923 003272 000207              RTS      %7              ;EXIT. NUMBER IN R0
924 003274 001233      RP1:      1233
925 003276 007622      RP2:      7622
926
927      ;CLRCD - CLEAR CURRENT DEVICE PARAMETERS
928 003300 005037 001416      CLRCD:  CLR      TXBUF
929 003304 005037 001414              CLR      TXCSR
930 003310 005037 001410              CLR      RXCSR
931 003314 005037 001412              CLR      RXBUF
932 003320 005037 001420              CLR      RXVTR
933 003324 005037 001424              CLR      TXVTR
934 003330 005037 001422              CLR      RXLVL
935 003334 005037 001426              CLR      TXLVL
936 003340 000207              RTS      %7
937
938      ;SUBROUTINE TO OUTPUT ASCII MESSAGE ON TELETYPE PRINTER.
939 003342 011600      TYP:      MOV      @%6,%0      ;GET ADDRESS THAT CONTAINS MESSAGE ADDRESS.
940 003344 062716 000002              ADD      #2,@%6          ;SET UP EXIT.
941 003350 011000              MOV      @%0,%0      ;ADDRESS OF MESSAGE TO R0.
942 003352 112037 003462      TYP A:  MOVB      (0)+,TYPDAT      ;GET CHARACTER
943 003356 122737 000100 003462      CMPB      #100,TYPDAT      ;CHECK FOR '@' CHARACTER
944 003364 001001              BNE      TYP C      ;BRANCH IF NOT '@'.
945 003366 000002              RTI                          ;TERMINATOR CHAR. DONE. EXIT.
946 003370 122737 000045 003462      TYP C:  CMPB      #45,TYPDAT      ;CHECK FOR '%'.
947 003376 001416              BEQ      TYP F      ;BRANCH IF '%'.
948 003400 122737 000043 003462      CMPB      #43,TYPDAT      ;NOT '%'.CHECK FOR '#'.
949 003406 001417              BEQ      TYP G      ;BRANCH IF '#'.
950 003410 004737 003416              JSR      %7,TYPD      ;TYPE CHAR IN TYPDAT
951 003414 000756              BR      TYP A
```

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 18
CZDLA.G.P11 30-MAR-78 08:51

SEQ 0018

```

952 003416 113777 003462 176012 TYPD:  MOV  TYPDAT,@TPB      ;OUTPUT CHARACTER TO PRINTER
953 003424 105777 176004          TSTB  @TPS          ;WAIT FOR DONE FLAG.
954 003430 100375          BPL    .-4
955 003432 000207          RTS     %7                ;EXIT
956 003434 112737 000015 003462 TYPF:  MOV  #15,TYPDAT      ;MOVE CARRIAGE RETURN CODE TO TYPDAT
957 003442 004737 003416          JSR  %7,TYPD          ;GO TYPE CHAR.
958 003446 112737 000012 003462 TYPG:  MOV  #12,TYPDAT      ;MOVE LF CODE TO TYPDAT.
959 003454 004737 003416          JSR  %7,TYPD          ;GO TYPE CHAR.
960 003460 000734          BR     TYPDA
961 003462 000000          TYPDAT: OPEN
962
963          ;SUBROUTINE TO OUTPUT A SERIES OF ASCII MESSAGES ON TELETYPE PRINTER
964 003464 011600          TYPB:  MOV  @%6,%0          ;GET ADDRESS THAT CONTAINS MESSAGE ADDRESS
965 003466 062716 000002          ADD  #2,@%6          ;UPDATE TO NEXT MESSAGE ADDRESS
966 003472 011037 003512          MOV  @%0,TYPB          ;ADDRESS OF MESSAGE TO TYPB
967 003476 022737 177777 003512          CMP  #-1,TYPB          ;CHECK FOR TERMINATOR
968 003504 001001          BNE  TYPB          ;BRANCH IF NOT TERMINATOR.
969 003506 000002          RTI     ;TERMINATOR, EXIT
970 003510 104000          TYPB:  TYPE          ;CALL ON TYP SUB TO TYPE MESSAGE
971 003512 000000          TYPB:  OPEN          ;ADDRESS OF MESSAGE GOES HERE
972 003514 000763          BR     TYPB          ;GO PROCESS NEXT MESSAGE
973
974          ;OVERLAY VECTOR AREA
975 003516 012701 000300          OVRLAY: MOV  #300,%1          ;GET DL11-E VECTOR BASE ADDRESS
976 003522 012702 000302          MOV  #302,%2
977 003526 012703 000004          MOV  #4,%3
978 003532 010221          OVRLYA: MOV  %2,(1)+          ;LOAD VECTOR WITH IOT ERROR TRAP
979 003534 010321          MOV  %3,(1)+
980 003536 062702 000004          ADD  #4,%2
981 003542 020127 001000          CMP  %1,#1000          ;ALL VECTORS BEEN LOADED
982 003546 001401          BEQ  OVRLYB
983 003550 000770          BR     OVRLYA
984 003552 000207          OVRLYB: RTS     7                ;EXIT
985
986          ;SUBROUTINE TO READ OCTAL DATA FROM THE TELETYPE PRINTER
987 003554 011646          RDOCT:  MOV  (SP),-(SP)          ;MAKE ROOM FOR DATA WORD
988 003556 010046          MOV  %0,-(SP)          ;SAVE R0
989 003560 010146          MOV  %1,-(SP)          ;SAVE R1
990 003562 005001          INDAT:  CLR  %1          ;CLEAR DATA WORD
991 003564 005037 001624          CLR  COUNT          ;SET NO. OF DIGITS = 0
992 003570 105777 175634          RDDAT: TSTB  @TKS          ;TEST TTY READ STATUS
993 003574 100375          BPL    RDDAT          ;WAIT
994 003576 117746 175630          MOV  @TKB,-(SP)          ;PUSH DIGIT ON STACK
995 003602 042716 177600          BIC  #177600,(SP)          ;++G
996 003606 105777 175622          ECDAT: TSTB  @TPS          ;TEST TTY PRINT STATUS
997 003612 100375          BPL    ECDAT          ;WAIT
998 003614 111677 175616          MOV  (SP),@TPB          ;ECHO CHARACTER
999 003620 122716 000015          CMPB  #15,(SP)          ;IS IT A TERMINATOR?
1000 003624 001432          BEQ  RETRN          ;BR IF YES
1001 003626 122716 000177          CMPB  #177,(SP)          ;IS IT A RUBOUT?
1002 003632 001423          BEQ  RREAD          ;BR IF YES
1003 003634 122716 000060          CMPB  #60,(SP)          ;IS IT AN OCTAL DIGIT?
1004 003640 003020          BGT  RREAD          ;BR IF NO
1005 003642 122716 000067          CMPB  #67,(SP)          ;TEST AGAIN
1006 003646 002415          BLI  RREAD          ;BR IF NO
1007 003650 005237 001624          INC  COUNT          ;INC NO. OF DIGITS

```

```

1008 003654 022737 000007 001624      CMP      #7,COUNT      ;MORE THAN SIX DIGITS? ;:++G
1009 003662 003407                      BLE      RREAD      ;BR IF YES
1010 003664 006301                      ASL      %1          ;CLEAR LOWEST THREE BITS
1011 003666 006301                      ASL      %1          ;OF DATA WORD
1012 003670 006301                      ASL      %1
1013 003672 162716 000060              SUB      #60,(SP)      ;CONVERT TO BINARY
1014 003676 062601                      ADD      (SP)+,%1      ;ADD DIGIT TO DATA WORD
1015 003700 000733                      BR       RDDAT        ;GET NEXT DIGIT
1016 003702 104000                      RREAD:  TYPE          ;TELL USER ABOUT ILLEGAL CHARACTER
1017 003704 017253                      DTERR
1018 003706 005726                      TST      (SP)+        ;GET RID OF ILLEGAL CHARACTER
1019 003710 000724                      BR       INDAT        ;START SUBROUTINE AGAIN
1020 003712 010166 000010              RETRN:  MOV      %1,10(SP) ;STORE DATA WORD ON STACK
1021 003716 005726                      TST      (SP)+        ;INC STACK POINTER
1022 003720 012601                      MOV      (SP)+,%1      ;RESTORE R1
1023 003722 012600                      MOV      (SP)+,%0      ;RESTORE R0
1024 003724 000207                      RTS       PC          ;RETURN
1025
1026                      ;SUBROUTINE TO DELAY A SPECIFIED NUMBER OF MILLISECONDS
1027 003726 011637 003772              DLY:   MOV      @%6,DLCNT ;GET DELAY COUNT ADDRESS.
1028 003732 062716 000002                      ADD      #2,@%6      ;SET UP EXIT ADDRESS
1029 003736 017746 000030                      MOV      @DLCNT,-(6) ;DELAY COUNT TO STACK
1030 003742 001411                      BEQ      DLYC
1031 003744 005037 177776                      CLR      PSW          ;SET PRIORITY 0
1032 003750 012746 000226              DLYA:  MOV      #226,-(6) ;1 MSEC COUNT TO STACK
1033 003754 005316              DLYB:  DEC      @%6      ;DECREMENT 1 MSEC COUNT
1034 003756 001376                      BNE      DLYB          ;BRANCH IF NOT 0.
1035 003760 005726                      POPSP          ;ZERO. UNCOVER MSEC. COUNT.
1036 003762 005316                      DEC      @%6      ;DECREMENT IT
1037 003764 001371                      BNE      DLYA          ;BR IF NOT DONE DEL 'ING
1038 003766 005726              DLYC:  POPSP          ;DONE
1039 003770 000002                      RTI           ;EXIT.
1040 003772 000000              DLCNT: OPEN          ;CONTAINS MILLISECONDS COUNT ADDRESS.
1041
1042                      ;SUBROUTINE TO STALL A RANDOM NUMBER OF MILLISECONDS. MAXIMUM STALL
1043                      ;DETERMINED BY CONTENTS OF LOC STLMSK.
1044 003774 004737 003226              STAL: JSR      %7,RNGEN ;GO GET RANDOM NUMBER.
1045 004000 043700 001406                      BIC      STLMSK,%0    ;# IN R0. APPLY STALL MASK.
1046 004004 001404                      BEQ      STALB        ;BRANCH IF RESULT IS 0.
1047 004006 010037 004014                      MOV      %0,STALA
1048 004012 104016                      DELAY
1049 004014 000000              STALA: OPEN          ;DELAY COUNT
1050 004016 000002              STALB: RTI           ;DONE. EXIT.
1051
1052                      ;SUBROUTINE TO GENERATE RANDOM CHARACTER COUNT
1053 004020 004737 003226              GRCNT: JSR      %7,RNGEN ;GET RANDOM NUMBER
1054 004024 043700 004040                      BIC      RCMSK,%0     ;APPLY MASK
1055 004030 001773                      BEQ      GRCNT        ;TRY AGAIN IF RESULT 0
1056 004032 010037 004042                      MOV      %0,RNCNT    ;COUNT TO RNCNT
1057 004036 000207                      RTS       %7          ;EXIT.
1058 004040 000000              RCMSK: OPEN          ;RANDOM CHARACTER MASK.
1059 004042 000000              RNCNT: OPEN          ;RANDOM CHARACTER COUNT.
1060
1061                      ;SUBROUTINE TO SKIP ON FLAG AND TIME OUT IF SKIP FAILS
1062 004044 013737 001410 004112          TMRX:  MOV      RXCSR,SIOT ;SET UP RXCSR ADDRESS
1063 004052 000403                      BR       TIME1

```

```
1064 004054 013737 001414 004112 TMTX: MOV TXCSR,S1OT ;SET UP TXCSR ADDRESS
1065 004062 005037 004110 TIME1: CLR TIMER
1066 004066 005237 004110 TIME2: INC TIMER
1067 004072 001405 BEQ TIMEX ;BRANCH IF COUNTER OVERFLOW
1068 004074 105777 000012 TSTB @S1OT
1069 004100 100372 BPL TIME2
1070 004102 062716 000002 ADD #2,@%6 ;SET UP EXIT RETURN
1071 004106 000002 TIMEX: RTI
1072 004110 000000 TIMER: 0
1073 004112 000000 S1OT: 0
1074
1075 ;SUBROUTINE TO SELECT LINE
1076 004114 032777 010000 174052 LINSEL: BIT #BIT12,@SRPTR
1077 004122 001003 BNE LINS LX ;BRANCH IF SET
1078 004124 005037 001612 CLR FOUNDV
1079 004130 000205 RTS 5
1080 004132 004737 003516 LINS LX: JSR %7,OVRLAY
1081 004136 004737 003300 JSR %7,CLRCD
1082 004142 104000 TYPE
1083 004144 016657 LDLINE
1084 004146 004737 003554 JSR PC,RDOCT
1085 004152 012637 001616 MOV (SP)+,TEMP
1086 004156 042737 177740 001616 BIC #177740,TEMP
```

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 21
CZDLAG.P11 30-MAR-78 08:51

I 2

SEQ 0021

1087	004164	013737	001616	001614	MOV	TEMP,LINENO	;SAVE FOR TYPING
1088	004172	006337	001616		ASL	TEMP	

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 22
CZDLA.G.P11 30-MAR-78 08:51

SEQ 0022

```

1089 004176 013701 001616      MOV      TEMP,X1
1090 004202 016101 001200      MOV      RXCR0(1),X1      ;GET RXCSR DEVICE ADDRESS
1091 004206 032701 000001      BIT      #BIT0,X1      ;IS DEVICE THERE
1092 004212 001403              BEQ      LINB      ;YES
1093 004214 104000              LINA:  TYPE      ;NO, REPORT
1094 004216 017210              MNOLIN
1095 004220 000744              BR      LINS LX
1096 004222 004737 006072      LINB:  JSR      X7,FORMAD
1097 004226 005037 177776      CLR      PSW
1098 004232 052737 000001 001472  BIS      #BIT0,FMAP      ;SET MAPPING FLAG
1099 004240 042777 000100 175146  BIC      #BIT6,@TXCSR
1100 004246 052777 000100 175140  BIS      #BIT6,@TXCSR
1101 004254 000240              NOP
1102 004256 000240              NOP
1103 004260 005737 001420      TST      RXVTR
1104 004264 001753              BEQ      LINA
1105 004266 042777 000100 175120  BIC      #BIT6,@TXCSR
1106 004274 012737 000340 177776  MOV      #PRTY7,PSW
1107 004302 004537 004474      JSR      5,OACNV      ;TYPE LINE #
1108 004306 001614              LINENO
1109 004310 016716              SELINE
1110 004312 000002              2
1111 004314 104000              TYPE
1112 004316 016705              ALINE
1113 004320 000205              RTS      5
1114
1115      ; SUBROUTINE TO INITIALIZE BINARY COUNT PATTERNS
1116 004322 012737 177777 004344  INBIN:  MOV      #-1,RIND      ;SET ALL VARIABLES
1117 004330 004537 004562              JSR      X5,BMOVE      ;TO MINUS 1.
1118 004334 004344              RIND
1119 004336 004345              RIND+1
1120 004340 000013              11.
1121 004342 000207              RTS      X7      ;EXIT
1122 004344 000000      RIND:  OPEN
1123 004346 000000      PTO:   OPEN
1124 004350 000000      PT1:   OPEN
1125 004352 000000      PIND:   OPEN
1126 004354 000000      PTOP:   OPEN
1127 004356 000000      PT1P:   OPEN
1128
1129      ; SPECIAL BINARY COUNT PATTERN SUBROUTINE. EXITS WITH BIN CHAR IN RO
1130 004360 013737 004346 004350  GTBIN:  MOV      PTO,PT1      ;PREVIOUS BIN CHAR TO PT1
1131 004366 005137 004350              COM      PT1
1132 004372 005137 004344              COM      RIND
1133 004376 001002              BNE      .+6
1134 004400 005237 004350              INC      PT1
1135 004404 042737 177400 004350  BIC      #177400,PT1      ;MASK TO 8 BITS
1136 004412 013737 004350 004346  MOV      PT1,PTO      ;SAVE BIN CHAR IN PTO
1137 004420 013700 004350              MOV      PT1,X0      ;BIN CHAR TO RO.
1138 004424 000207              RTS      X7      ;EXIT.
1139 004426 013737 004354 004356  GTBINP: MOV      PTO,PT1P      ;PREVIOUS BIN CHAR TO PT1P
1140 004434 005137 004356              COM      PT1P
1141 004440 005137 004352              COM      PIND
1142 004444 001002              BNE      .+6
1143 004446 005237 004356              INC      PT1P
1144 004452 042737 177400 004356  BIC      #177400,PT1P      ;MASK TO 8 BITS.

```

```

1145 004460 013737 004356 004354      MOV      PT1P,PTOP      ;SAVE BIN CHAR IN PTOP.
1146 004466 013701 004356              MOV      PT1P,%1      ;BIN CHAR TO R1.
1147 004472 000207              RTS          %7              ;EXIT.
1148
1149      ;OCTAL TO ASCII CONVERT ROUTINE
OACNV:  SAVREG
1150 004474 104013              MOV      @(%)+,%OACNVX      ;GET OCTAL VALUE.
1151 004476 013537 004560              MOV      (%)+,%1      ;GET DESTINATION ADDR.
1152 004502 012501              MOV      (%)+,%2      ;GET CONVERT COUNT.
1153 004504 012502              ADD       %2,%1      ;DEVELOP ADDR TO STORE 1ST CHAR.
1154 004506 060201              OACNVA: MOV      OACNVX,%3
1155 004510 013703 004560              BIC      #177770,%3      ;ISOLATE LEAST SIGNIFICANT DIGIT.
1156 004514 042703 177770              ADD      #60,%3      ;CONVERT DIGIT TO ASCII.
1157 004520 062703 000060              MOVB     %3,-(1)      ;STORE ASCII CHARACTER.
1158 004524 110341              BIC      #7,OACNVX
1159 004526 042737 000007 004560      ROR      OACNVX
1160 004534 006037 004560      ROR      OACNVX
1161 004540 006037 004560      ROR      OACNVX
1162 004544 006037 004560      DEC      %2          ;DONE ALL DIGITS?
1163 004550 005302              BNE      OACNVA        ;BRANCH IF NOT DONE.
1164 004552 001356              RSTREG
1165 004554 104014              RTS          %5          ;DONE. EXIT.
1166 004556 000205
1167 004560 000000      OACNVX: OPEN
1168
1169      ;SUBROUTINE TO MOVE A VARIABLE NUMBER OF BYTES.
BMOVE:  SAVREG      ;SAVE REGS.
1170 004562 104013      MOV      (%)+,%1      ;GET 'FROM' ADDRESS
1171 004564 012501      MOV      (%)+,%2      ;GET 'TO' ADDRESS
1172 004566 012502      MOV      (%)+,%3      ;GET COUNT
1173 004570 012503      BMOVA: MOVB     (1)+,(2)+ ;MOVE BYTE
1174 004572 112122      DEC      %3          ;DECREMENT COUNT
1175 004574 005303      BNE      BMOVA        ;BRANCH IF NOT DONE.
1176 004576 001375      RSTREG      ;RESTORE REGS.
1177 004600 104014      RTS          %5          ;DONE EXIT
1178 004602 000205
1179
1180      ;BINARY TO DECIMAL ASCII CONVERT SUBROUTINE.
BDCNV:  SAVREG
1181 004604 104013      MOV      #DECVAL,%0      ;SET UP ADDR TO STORE DECIMAL ASCII IN R0
1182 004606 012700 004762      MOV      @(%)+,%1      ;BINARY VALUE TO R1.
1183 004612 013501      MOV      (%)+,%BDCNVC    ;GET DEST ADDR
1184 004614 012537 004672      MOV      (%)+,%BDCNVD    ;GET CHAR COUNT
1185 004620 012537 004674      MOV      #ADTENP,%2      ;ADDR OF TEN POWER STRING TO R2.
1186 004624 012702 004750      MOV      #5,CNVCTR      ;SET UP FOR 5 POWER CONVERSIONS.
1187 004630 012737 000005 004742      MOV      (2)+,TENPWR     ;MOVE POWER OF TEN VALUE TO TENPWR.
1188 004636 012237 004746      JSR      %7,SUBTEN      ;PERFORM CONVERSION
1189 004642 004737 004702      DEC      CNVCTR          ;DONE 5 CONVERSIONS?
1190 004646 005337 004742      BNE      BDCNVA        ;BRANCH IF NOT YET 5.
1191 004652 001371      SUB      BDCNVD,%0
1192 004654 163700 004674      MOV      %0,BDCNVB
1193 004660 010037 004670      JSR      %5,BMOVE
1194 004664 004537 004562      BDCNVB: 0
1195 004670 000000      BDCNVC: 0
1196 004672 000000      BDCNVD: 0
1197 004674 000000      RSTREG
1198 004676 104014      RTS          %5          ;YES, EXIT.
1199 004700 000205      SUBTEN: CLR      DIGIT      ;CLEAR DIGIT
1200 004702 005037 004744

```

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 24
CZDLA.G.P11 30-MAR-78 08:51

SEQ 0024

1201	004706	163701	004746		SUBTNA: SUB	TENPWR,%1	;SUBTRACT TEN POWER FROM BINARY VALUE.
1202	004712	103403			BCS	SUBTNB	;BRANCH IF UNSUCCESSFUL SUBTRACTION.
1203	004714	005237	004744		INC	DIGIT	
1204	004720	000772			BR	SUBTNA	
1205	004722	063701	004746		SUBTNB: ADD	TENPWR,%1	;RESTORE SUBTRACTED VALUE.
1206	004726	062737	000060	004744	ADD	#60,DIGIT	;CONVERT (DIGIT) TO ASCII
1207	004734	113720	004744		MOVB	DIGIT,(0)+	;MOVE ASCII CHAR TO DECVAL FIELD.
1208	004740	000207			RTS	%7	;EXIT.
1209	004742	000000			CNVCTR: OPEN		
1210	004744	000000			DIGIT: OPEN		
1211	004746	000000			TENPWR: OPEN		
1212	004750	023420			ADTENP: 10000.		
1213	004752	001750				1000.	
1214	004754	000144				100.	
1215	004756	000012				10.	
1216	004760	000001				1	
1217	004762	040	040	040	DECVAL: .BYTE	040,040,040,040,040,040	
1218	004765	040	040	040			
1219	004770	042777	000002	174412	DATTST: BIC	#BIT1,@RXCSR	;CLEAR DATA TERM. READY
1220	004776	052777	000004	174410	BIS	#BIT2,@TXCSR	;SET MAINTENANCE BIT
1221	005004	012737	000144	001564	MOV	#100.,CTRO	;GET CHARACTER COUNT
1222	005012	105777	174376		DATAA: TSTB	@TXCSR	;WAIT FOR
1223	005016	100375			BPL	.-4	;READY FLAG
1224	005020	004737	004426		JSR	7,GTBINP	;GET CHARACTER
1225	005024	110137	001560		MOVB	%1,CRBUFA	;MOVE CHARACTER
1226	005030	004737	005374		JSR	7,MASKIT	;MASK OFF NON TRANSMITTED BITS
1227	005034	110177	174356		MOVB	%1,@TXBJF	;TRANSMIT CHARACTER
1228	005040	105777	174344		TSTB	@RXCSR	;WAIT FOR
1229	005044	100375			BPL	.-4	;DONE FLAG
1230	005046	117737	174340	001556	MOVB	@RXBUF,CRBUF	;GET RECEIVED CHARACTER
1231	005054	104004			DATCHK		;CHK DATA
1232	005056	005337	001564		DEC	CTRO	;DECREMENT CHARACTER COUNT
1233	005062	001353			BNE	DATAA	
1234	005064	005726			TST	(6)+	;POP STACK
1235	005066	104012			SCOPE		
1236							
1237	005070	104000			SETSR: TYPE		;TYPE SELECT OPTION MESSAGE.
1238	005072	016117			ASETSR		
1239	005074	000000			HALT		;COMMON HALT.
1240	005076	000207			RTS	%7	;EXIT.
1241	005100	104000			INCRTN: TYPE		;TYPE INCORRECT ROUTINE SELECTED.
1242	005102	016216			AINCRT		
1243	005104	000000			HALT		;COMMON HALT.
1244	005106	000207			RTS	%7	;EXIT.
1245	005110	104000			INCRPG: TYPE		
1246	005112	016337			AINCPG		
1247	005114	000000			HALT		
1248	005116	000137	002044		JMP	START	
1249	005122	005037	001612		PRGEND: CLR	FOUNDV	
1250	005126	032777	020000	173040	BIT	#BIT13,@SRPTR	;INHIBIT PRINT SET?
1251	005134	001026			BNE	PRGEXT	;BR IF SET
1252	005136	004537	004604		JSR	%5,BDCNV	
1253	005142	001636			PASCNT		
1254	005144	016407			APCNT		
1255	005146	000006			6		
1256	005150	004537	004474		JSR	%5,OACNV	;CONVERT LINE NUMBER

```
1257 005154 001614 LINENO
1258 005156 016427 ACLIN
1259 005160 000002 2
1260 005162 004537 004474 JSR %5,0ACNV ;CONVERT RXCSR
1261 005166 001410 RXCSR
1262 005170 016443 APRXC
1263 005172 000006 6
1264 005174 004537 004474 JSR %5,0ACNV ;CONVERT VECTOR
1265 005200 001420 RXVTR
1266 005202 016464 APVEC
1267 005204 000004 4
1268 005206 104000 TYPE ;TYPE PROGRAM END.
1269 005210 016372 APGEN
1270 005212 032777 010000 172754 PRGEXT: BIT #BIT12,@SRPTR ;LOCK ON LINE
1271 005220 001403 BEQ PRGXT1 ;BR IF NOT SET
1272 005222 005237 001636 INC PASCNT
1273 005226 000425 BR PRGXTL
1274 005230 013737 001614 001616 PRGXT1: MOV LINENO,TEMP ;GET LINENO
1275 005236 006337 001616 ASL TEMP
1276 005242 062737 000002 001616 PRGEC: ADD #2,TEMP ;UPDATE LINE NUMBER
1277 005250 013701 001616 PRGEA: MOV TEMP,%1
1278 005254 016101 001200 MOV RXCR0(1),%1 ;GET RXCSR DEVICE ADDRESS
1279 005260 022701 177777 CMP #177777,%1 ;LAST ONE
1280 005264 001023 BNE PRGEB ;NO,CONTINUE
1281 005266 005237 001636 INC PASCNT
1282 005272 005037 001614 CLR LINENO
1283 005276 005037 001616 CLR TEMP
1284 005302 013705 000042 PRGXTL: MOV @#42,%5
1285 005306 001405 BEQ CONT
1286 005310 000005 RESET
1287 005312 004715 LOGIC: JSR 7,(5)
1288 005314 000240 NOP
1289 005316 000240 NOP
1290 005320 000240 NOP
1291 005322 032777 010000 172644 CONT: BIT #BIT12,@SRPTR ;LOCK ON LINE
1292 005330 001747 BEQ PRGEA ;BRANCH IF NOT SET
1293 005332 000207 RTS 7
1294 005334 032701 000001 PRGEB: BIT #BIT0,%1 ;DEVICE THERE
1295 005340 001340 BNE PRGEC ;NO
1296 005342 006237 001616 ASR TEMP
1297 005346 013737 001616 001614 MOV TEMP,LINENO
1298 005354 004737 006072 JSR %7,FORMAD
1299 005360 000207 RTS %7 ;EXIT.
1300
1301 ;CONDITIONAL ERROR HALT ROUTINE.
1302 005362 005777 172606 EHLT: TST @SRPTR ;CHECK FOR HALT ON ERROR.
1303 005366 100001 BPL EHLTA ;BRANCH IF NO HALT DESIRED.
1304 005370 000000 HALT ;HALT.
1305 005372 000002 EHLTA: RTI ;IN DATA LIGHTS.
1306
1307 ;MASKIT - MASK DATA ACCORDING TO LINE NUMBER
1308 005374 013737 001402 001404 MASKIT: MOV UMASK,RMASK ;GET MASK
1309 005402 042737 177000 001404 BIC #177000,RMASK ;REMOVE C/D FLAG+PRIORITY
1310 005410 005137 001404 COM RMASK
1311 005414 043737 001404 001560 BIC RMASK,CBPUFA ;MASK DESIRED BITS
1312 005422 000207 RTS 7
```

```

1313
1314 ; DATA CHECK ROUTINE, TEST ERROR BITS
1315 005424 017737 173762 001562 DTCHK: MOV @RXBUF,CRBUF ;DID ANY ERROR BITS SET
1316 005432 032737 170000 001562 BIT #170000,CRBUF
1317 005440 001004 BNE DTCHKX ;YES, TYPE ERROR
1318 005442 023737 001556 001560 CMP CRBUF,CRBUFA ;COMPARE EXPECTED AND RECEIVED
1319 005450 001421 BEQ DTCHKA ;CHARS. BRANCH IF SAME.
1320 005452 004537 004474 DTCHKX: JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
1321 005456 001556 CRBUF ;SOURCE ADDR.
1322 005460 016074 AWAS ;DESTINATION ADDR.
1323 005462 000003 3 ;#OF DIGITS TO CONVERT.
1324 005464 004537 004474 JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
1325 005470 001560 CRBUFA ;SOURCE ADDR.
1326 005472 016063 AASB ;DESTINATION ADDR.
1327 005474 000003 3 ;#OF DIGITS TO CONVERT.
1328 005476 004537 004474 JSR %5,OACNV
1329 005502 001562 CRBUF
1330 005504 016107 ARXBUF
1331 005506 000006 6
1332 005510 104015 ERROR1
1333 005512 016051 ERDAT
1334 005514 000002 DTCHKA: RTI
1335
1336 ; ERROR HANDLER
1337 005516 012737 177777 005666 ERR: MOV #-1,ERRB ;SET UP ONE MESSAGE CALL.
1338 005524 012737 000240 005670 MOV #240,ERRB+2
1339 005532 005037 005704 CLR ERRE
1340 005536 000413 BR ERRA
1341 005540 011637 005666 ERR1: MOV @%6,ERRB ;DEVELOP ADDT'L MESSAGE ADDR.
1342 005544 017737 000116 005666 MOV @ERRB,ERRB ;STORE AT ERRB.
1343 005552 012737 177777 005670 MOV #-1,ERRB+2
1344 005560 012737 000002 005704 MOV #2,ERRE
1345 005566 032777 020000 172400 ERRA: BIT #BIT13,@SRPTR ;INHIBIT ERROR PRINT?
1346 005574 001036 BNE ERRC ;BRANCH TO INHIBIT PRINT.
1347 005576 011637 005702 MOV @%6,ERRD ;DEVELOP CALLING ADDR.
1348 005602 162737 000002 005702 SUB #2,ERRD
1349 005610 013737 001456 001460 MOV RTNNO,TNNO
1350 005616 042737 100000 001460 BIC #BIT15,TNNO
1351 005624 004537 004474 JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
1352 005630 005702 ERRD ;SOURCE ADDR.
1353 005632 015240 APC ;DESTINATION ADDR.
1354 005634 000006 6 ;#OF DIGITS TO CONVERT.
1355 005636 004537 004474 JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
1356 005642 001410 RXCSR ;SOURCE ADDR.
1357 005644 015257 MRXNUM ;DESTINATION ADDR.
1358 005646 000006 6 ;#OF DIGITS TO CONVERT.
1359 005650 004537 004474 JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
1360 005654 001456 RTNNO ;SOURCE ADDR.
1361 005656 015230 ATNUMB ;DESTINATION ADDR.
1362 005660 000003 3 ;#OF DIGITS TO CONVERT.
1363 005662 104001 TYPES ;TYPE:
1364 005664 015226 EMO ;ERROR HEADER,
1365 005666 000000 ERRB: OPEN ;ADDT'L ERROR MESSAGE IF ANY.
1366 005670 177777 -1
1367 005672 104010 ERRC: EHALT ;GO ERR HALT IF DESIRED.
1368 005674 063716 005704 ADD ERRE,%6

```

```
1369 005700 000002          RTI          ;EXIT.
1370 005702 000000          ERRD: OPEN
1371 005704 000000          ERRE: OPEN
1372
1373          ;
1374 005706 013737 177776 001470  ;ERROR TRAP HANDLER - TYPE TO AND FROM WHERE ERROR TRAP OCCURRED
1375 005714 012737 000340 177776  ERTTP: MOV PSW,OLDPS          ;SAVE OLD STATUS
1376 005722 006237 001470          MOV #PRTY7,PSW
1377 005726 006237 001470          ASR OLDPS
1378 005732 006237 001470          ASR OLDPS
1379 005736 042737 177740 001470  ASR OLDPS
1380 005744 013737 001470 001632  BIC #177740,OLDPS
1381 005752 011637 001634          MOV OLDPS,TOPC
1382 005756 004537 004474          MOV @%6,FROMPC          ;GET FROM PC
1383 005762 001632          ERTPA: JSR %5,OACNV
1384 005764 017145          TOPC
1385 005766 000006          MTO
1386 005770 004537 004474          6
1387 005774 001634          JSR %5,OACNV
1388 005776 017177          FROMPC
1389 006000 000006          MFROM
1390 006002 104000          6
1391 006004 017100          TYPE
1392 006006 000000          MTERR
1393 006010 000137 002044          HALT
1394          JMP START
1395          ;
1396 006014 011637 001632          ;MAPVEC - MAP VECTOR OR REPORT ERROR DEPENDING ON FMAP FLAG
1397 006020 022626          MAPVEC: MOV @%6,TOPC
1398 006022 011637 001634          POPSP2
1399 006026 162737 000004 001632  MOV @%6,FROMPC
1400 006034 005737 001472          SUB #4,TOPC
1401 006040 001746          TST FMAP
1402 006042 013737 001632 001424  BEQ ERTPA          ;NOT MAPPING, REPORT ERROR
1403 006050 162737 000004 001632  MOV TOPC,TVTR          ;STORE VECTOR
1404 006056 013737 001632 001420  SUB #4,TOPC
1405 006064 005037 001472          MOV TOPC,RXVTR
1406 006070 000002          CLR FMAP
1407          RTI
1408          ;
1409 006072 010137 001410          ;FORMAD-FORM DEVICE AT ADDRESSES
1410 006076 062701 000002          FORMAD: MOV %1,R'LSR
1411 006102 010137 001412          ADD #2,%1
1412 006106 062701 000002          MOV %1,RXBUF
1413 006112 010137 001414          ADD #2,%1
1414 006116 062701 000002          MOV %1,TVCSR
1415 006122 010137 001416          ADD #2,%1
1416 006126 013737 001614 001616  MOV %1,TVBUF
1417 006134 006337 001616          MOV LINENO,TEMP          ;GET PRIORITY
1418 006140 062737 001302 001616  ASL TEMP
1419 006146 017737 173444 001620  ADD #CMASO,TEMP
1420 006154 013737 001620 001402  MOV @TEMP,TEMP1
1421 006162 000337 001620          MOV TEMP1,UMASK
1422 006166 006337 001620          SWAB TEMP1
1423 006172 042737 177437 001620  ASL TEMP1
1424 006200 013737 001620 001422  BIC #177437,TEMP1
1424          MOV TEMP1,RXLVL
```

MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 28
CZDLAG.P11 30-MAR-78 08:51

SEQ 0028

```

1425 006206 013737 001620 001426      MOV    TEMP1,TXLVL
1426 006214 000207                      RTS     %7
1427                                     ;
1428                                     ;DOTHIS - SELECTABLE TEST DECISION MAKER
1429                                     ;
1430 006216 032777 001000 171750  DOTHIS: BIT    #BIT9,@SRPTR    ;IS SELECT TEST SWITCH SET
1431 006224 001002                      BNE     GOBACK          ;RETURN TO TEST IF SW SET
1432 006226 000137 002410                      JMP     GTRDYX          ;GO TO NEXT TEST
1433 006232 000207                      GOBACK: RTS     %7
1434                                     ;
1435 006234 012737 006244 000024  PFAIL:  MOV     #PWRUP,%24
1436 006242 000000                      HALT
1437 006244 012737 006234 000024  PWRUP:  MOV     #PFAIL,%24
1438 006252 000005                      RESET
1439 006254 012706 001176                      MOV     #SPBOT,%6
1440 006260 104000                      TYPE
1441 006262 017374                      MPWRF
1442 006264 104003                      ERROR
1443 006266 000452                      BR      RESTART
1444                                     ;
1445                                     ;DECIDE IF VECTOR TO BE MAPPED AND MAP
1446 006270 022737 000000 001612  TSTVEC: CMP     #0,FOUNDV    ;NEED VECTOR MAPPING
1447 006276 001045                      BNE     TSTVEX          ;NO, EXIT
1448 006300 004737 003516                      JSR     %7,OVRLAY
1449 006304 005037 001420                      CLR     RXVTR
1450 006310 005037 177776                      CLR     PSW
1451 006314 052737 000001 001472  BIS     #BIT0,FMAP      ;SET MAPPING FLAG
1452 006322 042777 000100 173064  BIC     #BIT6,@TXCSR    ;CAUSE INTERRUPT
1453 006330 052777 000100 173056  BIS     #BIT6,@TXCSR
1454 006336 000240                      NOP
1455 006340 000240                      NOP
1456 006342 005737 001420                      TST     RXVTR          ;DID TRAP OCCUR?
1457 006346 001011                      BNE     TSTVA          ;YES, OK
1458 006350 032777 020000 171616  BIT     #BIT13,@SRPTR
1459 006356 001344                      BNE     TSTVEC
1460 006360 104000                      TYPE          ;NO, ERROR
1461 006362 017256                      INTER
1462 006364 104003                      ERROR
1463 006366 000137 006270                      JMP     TSTVEC
1464 006372 042777 000100 173014  TSTVA:  BIC     #BIT6,@TXCSR
1465 006400 012737 000340 177776  MOV     #PRTY7,PSW    ;RAISE PRIORITY, RETURN
1466 006406 005237 001612                      INC     FOUNDV
1467 006412 000207                      TSTVEX: RTS     %7
1468                                     ;
1469                                     ;RESTART ROUTINE
1470 006414 013700 001450  RESTART: MOV     PRGNUM,%0
1471 006420 006300                      ASL     %0
1472 006422 000170 006426                      JMP     @RSTART(0)    ;GO RESTART SELECTED PROGRAM
1473                                     ;
1474 006426 006500  RSTART:  PRG0A          ;PROGRAM 0 RESTART ADDRESS
1475 006430 014546                      PRG1A          ;PROGRAM 1 RESTART ADDRESS
1476 006432 014620                      PRG2A          ;PROGRAM 2 RESTART ADDRESS
1477 006434 014716                      PRG3A          ;PROGRAM 3 RESTART ADDRESS
1478 006436 014746                      PRG4A          ;PROGRAM 4 RESTART ADDRESS
1479 006440 005110                      INCRPG
1480 006442 005110                      INCRPG

```

```

1481 006444 005110          INCRPG
1482
1483
1484          : PRGO - INPUT-OUTPUT LOGIC TESTS
1485
1486 006446 012737 006504 001452 PRGO:  MOV    #ATO,KSTART
1487 006454 005737 000042          TST     @#42          ;MONITOR LOAD
1488 006460 001005          BNE     PRGOB          ;YES, START TEST
1489 006462 104000          TYPE          ;TYPE TITLE AND INSTRUCTIONS
1490 006464 015270          POTIT
1491 006466 000000          HALT
1492 006470 004737 005070          JSR     7,SETSR
1493 006474 004537 004114          PRGOB: JSR     5,LINSEL          ;GO GET LINE # FROM USER
1494 006500 000137 002402          PRGOA: JMP     GETRDY          ;GET STARTED.
1495          X=-1
1496 006504          TSTA     1000.,AA,CD
1497 006504          TSTAA    AA,1000., X+1+CD, X+2, X+1
1498          ;*****
1499 006504 100000          ATO:     100000          ;TEST NUMBER
1500 006506 006536          AT1      ;ADDRESS OF NEXT TEST
1501 006510 001750          1000.      ;ITERATION COUNT
1502 006512 006514          AAA        ;SCOPE ENTRY POINT
1503          X=X+1
1504          ;*****
1505          ;TEST ABILITY TO REFERENCE RECEIVER CSR WITHOUT TRAPPING
1506 006514 012737 006530 000004 AAA:     MOV     #AAE,MACHER          ;SET UP MACHINE ERROR TRAP.
1507 006522 005077 172662          CLR     @RXCSR          ;REFERENCE RXCSR
1508 006526 104012          AAB:     SCOPE          ;OK IF NO TRAP. SCOPE
1509 006530 022626          AAE:     POPSP2
1510 006532 104003          ERROR          ;TRAPPED WHEN REFERENCING RXCSR.
1511 006534 000774          BR       AAB
1512 006536          TSTA     1000.,AB,CD
1513 006536          TSTAA    AB,1000., X+1+CD, X+2, X+1
1514          ;*****
1515 006536 100001          AT1:     100001          ;TEST NUMBER
1516 006540 006576          AT2      ;ADDRESS OF NEXT TEST
1517 006542 001750          1000.      ;ITERATION COUNT
1518 006544 006546          ABA        ;SCOPE ENTRY POINT
1519          X=X+1
1520          ;*****
1521          ;TEST ABILITY TO REFERENCE RECEIVER BUFFER WITHOUT TRAPPING
1522 006546 012737 006570 000004 ABA:     MOV     #ABE,MACHER          ;SET UP MACHINE ERROR TRAP.
1523 006554 005737 002016          TST     @#XORFLG
1524 006560 100402          BMI     ABB
1525 006562 005777 172624          TST     @RXBUF          ;REFERENCE RXBUF
1526 006566 104012          ABB:     SCOPE          ;OK IF NO TRAP SCOPE
1527 006570 022626          ABE:     POPSP2
1528 006572 104003          ERROR          ;TRAPPED WHEN REFERENCING RXBUF
1529 006574 000774          BR       ABB
1530 006576          TSTA     1000.,AC,CD
1531 006576          TSTAA    AC,1000., X+1+CD, X+2, X+1
1532          ;*****
1533 006576 100002          AT2:     100002          ;TEST NUMBER
1534 006600 006630          AT3      ;ADDRESS OF NEXT TEST
1535 006602 001750          1000.      ;ITERATION COUNT
1536 006604 006606          ACA        ;SCOPE ENTRY POINT

```

```

1537          000002          X=X+1
1538
1539          ;*****
1540 006606 012737 006622 000004 ACA: MOV #ACE,MACHER ;TEST ABILITY TO REFERENCE TRANSMITTER CSR WITHOUT TRAPPING.
1541 006614 005777 172574      TST @TXCSR ;SET UP MACHINE ERROR TRAP.
1542 006620 104012      ACB: SCOPE ;REFERENCE TXCSR
1543 006622 022626      ACE: POPSP2 ;SCOPE
1544 006624 104003      ERROR ;TRAPPED WHEN REFERENCING TXCSR
1545 006626 000774      BR ACB
1546 006630      TSTA 1000.,AD,CD
1547 006630      TSTAA AD,1000., X+1+CD, X+2, X+1
1548          ;*****
1549 006630 100003 AT3: 100003 ;TEST NUMBER
1550 006632 006662      AT4 ;ADDRESS OF NEXT TEST
1551 006634 001750      1000. ;ITERATION COUNT
1552 006636 006640      ADA ;SCOPE ENTRY POINT
1553          X=X+1
1554          ;*****
1555          ;TEST ABILITY TO REFERENCE TRANSMITTER BUFFER WITHOUT TRAPPING
1556 006640 012737 006654 000004 ADA: MOV #ADE,MACHER ;SET UP MACHINE ERROR TRAP.
1557 006646 005777 172544      TST @TXBUF ;REFERENCE TX BUF.
1558 006652 104012      ADB: SCOPE ;SCOPE
1559 006654 022626      ADE: POPSP2
1560 006656 104003      ERROR ;TRAPPED WHEN REFERENCING TXBUF
1561 006660 000774      BR ADB
1562 006662      TSTA 10.,AE,CD
1563 006662      TSTAA AE,10., X+1+CD, X+2, X+1
1564          ;*****
1565 006662 100004 AT4: 100004 ;TEST NUMBER
1566 006664 006762      AT5 ;ADDRESS OF NEXT TEST
1567 006666 000012      10. ;ITERATION COUNT
1568 006670 006672      AEA ;SCOPE ENTRY POINT
1569          X=X+1
1570          ;*****
1571          ;TEST THAT TXCSR BIT 0 (BREAK) CAN BE SET AND CLEARED
1572          ;AND THAT RESET CLEARS IT
1573 006672 032777 000001 172514 AEA: BIT #BIT0,@TXCSR ;SEE IF BIT IS CLEAR
1574 006700 001402      BEQ AEB ;BR IF CLEAR
1575 006702 104003      ERROR ;RESET DID NOT CLEAR IT
1576 006704 000421      BR AED
1577 006706 052777 000001 172500 AEB: BIS #BIT0,@TXCSR ;SET TXCSR BIT 0
1578 006714 032777 000001 172472      BIT #BIT0,@TXCSR ;DID IT SET
1579 006722 001002      BNE AEC ;YES, GO ON
1580 006724 104003      ERROR ;TXCSR BIT0 FAILED TO SET
1581 006726 000410      BR AED
1582 006730 042777 000001 172456 AEC: BIC #BIT0,@TXCSR ;CLEAR TXCSR BIT 0
1583 006736 032777 000001 172450      BIT #BIT0,@TXCSR ;DID IT CLEAR
1584 006744 001401      BEQ AED
1585 006746 104003      ERROR ;TXCSR BIT 0 DID NOT CLEAR
1586 006750 052777 000001 172436 AED: BIS #BIT0,@TXCSR ;ISSUE RESET TO CLEAR
1587 006756 104011      SRESET
1588 006760 104012      SCOPE
1589 006762      TSTA 10.,AG,CD
1590 006762      TSTAA AG,10., X+1+CD, X+2, X+1
1591          ;*****
1592 006762 100005 AT5: 100005 ;TEST NUMBER

```

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 31
CZDLA.G.P11 30-MAR-78 08:51

SEQ 0031

```

1593 006764 007062          AT6          ;ADDRESS OF NEXT TEST          *
1594 006766 000012          10.          ;ITERATION COUNT              *
1595 006770 006772          AGA          ;SCOPE ENTRY POINT              *
1596          000005          X=X+1          ;                               *
1597          ;*****
1598          ;TEST THAT TXCSR BIT2 CAN BE SET, CLEARED, AND THAT RESET CLEARS IT.
1599 006772 032777 000004 172414 AGA:  BIT  #BIT2,@TXCSR ;SEE IF TXCSR BIT2 IS CLEAR.
1600 007000 001402          BEQ  AGB          ;BRANCH IF BIT IS CLEAR.
1601 007002 1040C3          ERROR          ;RESET DID NOT CLEAR TXCSR BIT2
1602 007004 000421          BR  AGD          ;
1603 007006 052777 000004 172400 AGB:  BIS  #BIT2,@TXCSR ;SET TXCSR BIT2.
1604 007014 032777 000004 172372      BIT  #BIT2,@TXCSR ;SEE IF BIT IS SET.
1605 007022 001002          BNE  AGC          ;BRANCH IF BIT IS SET.
1606 007024 104003          ERROR          ;TXCSR BIT2 FAILED TO SET.
1607 007026 000410          BR  AGD          ;
1608 007030 042777 000004 172356 AGC:  BIC  #BIT2,@TXCSR ;CLEAR TXCSR BIT2
1609 007036 032777 000004 172350      BIT  #BIT2,@TXCSR ;SEE IF BIT IS CLEAR.
1610 007044 001401          BEQ  AGD          ;
1611 007046 104003          ERROR          ;TXCSR BIT2 FAILED TO CLEAR.
1612 007050 052777 000004 172336 AGD:  BIS  #BIT2,@TXCSR ;SET TXCSR BIT2.
1613 007056 104011          SRESET          ;ISSUE RESET TO CLEAR BIT.
1614 007060 104012          SCOPE          ;SCOPE
1615 007062          TSTA  10.,AJ,CD
1616 007062          TSTA  AJ,10., X+1+CD, X+2, X+1
1617          ;*****
1618 007062 100006          AT6:  100006          ;TEST 'BER          *
1619 007064 007170          AT7          ;ADDR. OF NEXT TEST          *
1620 007066 000012          10.          ;ITERATION COUNT              *
1621 007070 007072          AJA          ;SCOPE ENTRY POINT              *
1622          000006          X=X+1          ;                               *
1623          ;*****
1624          ;TEST THAT TXCSR BIT6 CAN BE SET, CLEARED, AND THAT RESET CLEARS IT.
1625 007072 012737 000340 177776 AJA:  MOV  #PRTY7,PSW ;SET PRIORITY 7.
1626 007100 032777 000100 172306      BIT  #BIT6,@TXCSR ;SEE IF TXCSR BIT6 IS CLEAR.
1627 007106 001402          BEQ  AJB          ;BRANCH IF BIT IS CLEAR.
1628 007110 104003          ERROR          ;RESET DID NOT CLEAR TXCSR BIT6
1629 007112 000421          BR  AJD          ;
1630 007114 052777 000100 172272 AJB:  BIS  #BIT6,@TXCSR ;SET TXCSR BIT6.
1631 007122 032777 000100 172264      BIT  #BIT6,@TXCSR ;SEE IF BIT IS SET.
1632 007130 001002          BNE  AJC          ;BRANCH IF BIT IS SET.
1633 007132 104003          ERROR          ;TXCSR BIT6 FAILED TO SET.
1634 007134 000410          BR  AJD          ;
1635 007136 042777 000100 172250 AJC:  BIC  #BIT6,@TXCSR ;CLEAR TXCSR BIT6
1636 007144 032777 000100 172242      BIT  #BIT6,@TXCSR ;SEE IF BIT IS CLEAR.
1637 007152 001401          BEQ  AJD          ;
1638 007154 104003          ERROR          ;TXCSR BIT6 FAILED TO CLEAR.
1639 007156 052777 000100 172230 AJD:  BIS  #BIT6,@TXCSR ;SET TXCSR BIT6.
1640 007164 104011          SRESET          ;ISSUE RESET TO CLEAR BIT.
1641 007166 104012          SCOPE          ;SCOPE
1642 007170          TSTA  100.,AK,CD
1643 007170          TSTA  AK,100., X+1+CD, X+2, X+1
1644          ;*****
1645 007170 100007          AT7:  100007          ;TEST NUMBER          *
1646 007172 007214          AT10          ;ADDRESS OF NEXT TEST          *
1647 007174 000144          100.          ;ITERATION COUNT              *
1648 007176 007200          AKA          ;SCOPE ENTRY POINT              *

```

```

1649          000007          X=X+1
1650          ;*****
1651          ;TEST THAT TXCSR BIT 7 (READY BIT) IS SET UPON ENTERING ROUTINE AND
1652          ;THAT IT CAN BE READ RELIABLY.
1653 007200 105777 172210 AKA: TSTB @TXCSR ;SEE IF TXCSR BIT 7 IS SET.
1654 007204 100402 BMI AKB ;BRANCH IF SET.
1655 007206 104003 ERROR ;TXCSR BIT 7 NOT SET.
1656 007210 104011 SRESET ;ISSUE RESET TO CLEAR BIT IF ERROR
1657 007212 104012 AKB: SCOPE ;SCOPE
1658 007214 TSTA 100.,AL,0
1659 007214 TSTA AL,100., X+1+0, X+2, X+1
1660          ;*****
1661 007214 000010 AT10: 10 ;TEST NUMBER
1662 007216 007276 AT11 ;ADDRESS OF NEXT TEST
1663 007220 000144 100. ;ITERATION COUNT
1664 007222 007224 ALA ;SCOPE ENTRY POINT
1665          X=X+1
1666          ;*****
1667          ;TEST THAT RXCSR BIT 1 CAN BE SET + CLEARED
1668 007224 042777 000002 172156 AL BIC #BIT1,@RXCSR
1669 007232 052777 000002 172150 BIS #BIT1,@RXCSR ;SET RXCSR BIT1
1670 007240 032777 000002 172142 BIT #BIT1,@RXCSR ;SEE IF BIT IS SET
1671 007246 001002 BNE ALY ;BRANCH IF SET
1672 007250 104003 ERROR ;RXCSR BIT 1 FAILED TO SET
1673 007252 000410 BR ALZ
1674 007254 042777 000002 172126 ALY: BIC #BIT1,@RXCSR ;CLEAR RXCSR BIT 1
1675 007262 032777 000002 172120 BIT #BIT1,@RXCSR ;SEE IF BIT IS CLEAR
1676 007270 001401 BEQ ALZ
1677 007272 104003 ERROR ;RXCSR BIT 1 FAILED TO CLEAR
1678 007274 104012 ALZ: SCOPE ;SCOPE
1679 007276 TSTA 10.,AP,0
1680 007276 TSTA AP,10., X+1+0, X+2, X+1
1681          ;*****
1682 007276 000011 AT11: 11 ;TEST NUMBER
1683 007300 007376 AT12 ;ADDRESS OF NEXT TEST
1684 007302 000012 10. ;ITERATION COUNT
1685 007304 007306 APA ;SCOPE ENTRY POINT
1686          X=X+1
1687          ;*****
1688          ;TEST THAT RXCSR BIT2 IS CLEAR AND CAN BE READ RELIABLY.
1689 007306 032777 000004 172074 APA: BIT #BIT2,@RXCSR ;SEE IF RXCSR BIT2 IS CLEAR.
1690 007314 001402 BEQ APB ;BRANCH IF BIT IS CLEAR.
1691 007316 104003 ERROR ;RXCSR BIT2 IS NOT CLEAR.
1692 007320 000421 BR APD
1693 007322 052777 000004 172060 APB: BIS #BIT2,@RXCSR ;SET RXCSR BIT2
1694 007330 032777 000004 172052 BIT #BIT2,@RXCSR ;SEE IF BIT IS SET
1695 007336 001002 BNE APCX ;BRANCH IF SET
1696 007340 104003 ERROR ;RXCSR BIT2 FAILED TO SET
1697 007342 000410 BR APD
1698 007344 042777 000004 172036 APCX: BIC #BIT2,@RXCSR ;CLEAR RXCSR BIT2
1699 007352 032777 000004 172030 BIT #BIT2,@RXCSR ;SEE IF BIT IS CLEAR
1700 007360 001401 BEQ APD
1701 007362 104003 ERROR ;RXCSR BIT2 FAILED TO CLEAR
1702 007364 052777 000004 172016 APD: BIS #BIT2,@RXCSR ;SET BIT
1703 007372 104011 SRESET ;ISSUE RESET TO CLEAR BIT
1704 007374 104012 SCOPE

```

```

1705 007376          TSTA  10.,AQ,0
1706 007376          TSTAA AQ,10., X+1+0, X+2, X+1
1707          ;*****
1708 007376 000012    AT12: 12          ;TEST NUMBER
1709 007400 007476          AT13        ;ADDRESS OF NEXT TEST
1710 007402 000012          10.         ;ITERATION COUNT
1711 007404 007406          AQA         ;SCOPE ENTRY POINT
1712          X=X+1
1713          ;*****
1714          ;TEST THAT RXCSR BIT3 CAN BE SET, CLEARED, AND THAT RESET CLEARS IT.
1715 007406 032777 000010 171774 AQA:  BIT  #BIT3,@RXCSR ;SEE IF RXCSR BIT3 IS CLEAR.
1716 007414 001402          BEQ  AQB     ;BRANCH IF BIT IS CLEAR.
1717 007416 104003          ERROR        ;RESET DID NOT CLEAR RXCSR BIT3
1718 007420 000421          BR  AQB
1719 007422 052777 000010 171760 AQB:  BIS  #BIT3,@RXCSR ;SET RXCSR BIT3.
1720 007430 032777 000010 171752          BIT  #BIT3,@RXCSR ;SEE IF BIT IS SET.
1721 007436 001002          BNE  AQC     ;BRANCH IF BIT IS SET.
1722 007440 104003          ERROR        ;RXCSR BIT3 FAILED TO SET.
1723 007442 000410          BR  AQC
1724 007444 042777 000010 171736 AQC:  BIC  #BIT3,@RXCSR ;CLEAR RXCSR BIT3
1725 007452 032777 000010 171730          BIT  #BIT3,@RXCSR ;SEE IF BIT IS CLEAR.
1726 007460 001401          BEQ  AQB
1727 007462 104003          ERROR        ;RXCSR BIT3 FAILED TO CLEAR.
1728 007464 052777 000010 171716 AQB:  BIS  #BIT3,@RXCSR ;SET RXCSR BIT3.
1729 007472 104011          SRESET       ;ISSUE RESET TO CLEAR BIT.
1730 007474 104012          SCOPE        ;SCOPE
1731 007476          TSTA  10.,AR,0
1732 007476          TSTAA AR,10., X+1+0, X+2, X+1
1733          ;*****
1734 007476 000013    AT13: 13          ;TEST NUMBER
1735 007500 007604          AT14        ;ADDRESS OF NEXT TEST
1736 007502 000012          10.         ;ITERATION COUNT
1737 007504 007506          ARA         ;SCOPE ENTRY POINT
1738          X=X+1
1739          ;*****
1740          ;TEST THAT RXCSR BIT5 CAN BE SET, CLEARED, AND THAT RESET CLEARS IT.
1741 007506 012737 C00340 177776 ARA:  MOV  #PRTY7,PSW ;PRTY7 TO INHIBIT ANY INT
1742 007514 032777 000040 171666          BIT  #BIT5,@RXCSR ;SEE IF RXCSR BIT5 IS CLEAR.
1743 007522 01402          BEQ  ARB     ;BRANCH IF BIT IS CLEAR.
1744 007524 104003          ERROR        ;RESET DID NOT CLEAR RXCSR BIT5
1745 007526 000421          BR  ARB
1746 007530 052777 000040 171652 ARB:  BIS  #BIT5,@RXCSR ;SET RXCSR BIT5.
1747 007536 032777 000040 171644          BIT  #BIT5,@RXCSR ;SEE IF BIT IS SET.
1748 007544 001002          BNE  ARC     ;BRANCH IF BIT IS SET.
1749 007546 104003          ERROR        ;RXCSR BIT5 FAILED TO SET.
1750 007550 000410          BR  ARC
1751 007552 042777 000040 171630 ARC:  BIC  #BIT5,@RXCSR ;CLEAR RXCSR BIT5
1752 007560 032777 000040 171622          BIT  #BIT5,@RXCSR ;SEE IF BIT IS CLEAR.
1753 007566 001401          BEQ  ARD
1754 007570 104003          ERROR        ;RXCSR BIT4 FAILED TO CLEAR.
1755 007572 052777 000040 171610 ARD:  BIS  #BIT5,@RXCSR ;SET RXCSR BIT5.
1756 007600 104011          SRESET       ;ISSUE RESET TO CLEAR BIT.
1757 007602 104012          SCOPE        ;SCOPE
1758 007604          TSTA  10.,AS,CD
1759 007604          TSTAA AS,10., X+1+CD, X+2, X+1
1760          ;*****

```

```

1761 007604 100014      AT14: 100014      ;TEST NUMBER
1762 007606 007712      AT15      ;ADDRESS OF NEXT TEST
1763 007610 000012      100.      ;ITERATION COUNT
1764 007612 007614      ASA        ;SCOPE ENTRY POINT
1765      000014      X=X+1
1766      ;*****
1767      ;TEST THAT RXCSR BIT6 CAN BE SET, CLEARED, AND THAT RESET CLEARS IT.
1768 007614 012737 000340 177776  ASA:  MOV    #PRTY7,PSW      ;SET PRIORITY 7.
1769 007622 032777 000100 171560      BIT    #BIT6,@RXCSR    ;SEE IF RXCSR BIT6 IS CLEAR.
1770 007630 001402      BEQ    ASB        ;BRANCH IF BIT IS CLEAR.
1771 007632 104003      ERROR          ;RESET DID NOT CLEAR RXCSR BIT6
1772 007634 000421      BR    ASD
1773 007636 052777 000100 171544  ASB:  BIS    #BIT6,@RXCSR    ;SET RXCSR BIT6.
1774 007644 032777 000100 171536      BIT    #BIT6,@RXCSR    ;SEE IF BIT IS SET.
1775 007652 001002      BNE    ASC        ;BRANCH IF BIT IS SET.
1776 007654 104003      ERROR          ;RXCSR BIT6 FAILED TO SET.
1777 007656 000410      BR    ASD
1778 007660 042777 000100 171522  ASC:  BIC    #BIT6,@RXCSR    ;CLEAR RXCSR BIT6
1779 007666 032777 000100 171514      BIT    #BIT6,@RXCSR    ;SEE IF BIT IS CLEAR.
1780 007674 001401      BEQ    ASD
1781 007676 104003      ERROR          ;RXCSR BIT6 FAILED TO CLEAR.
1782 007700 052777 000100 171502  ASD:  BIS    #BIT6,@RXCSR    ;SET RXCSR BIT6.
1783 007706 104011      SRESET        ;ISSUE RESET TO CLEAR BIT.
1784 007710 104012      SCOPE          ;SCOPE
1785 007712      TSTA    100.,AT,0
1786 007712      TSTAA   AT,100., X+1+0, X+2, X+1
1787      ;*****
1788 007712 000015      AT15:  15        ;TEST NUMBER
1789 007714 007740      AT16      ;ADDRESS OF NEXT TEST
1790 007716 000144      100.      ;ITERATION COUNT
1791 007720 007722      ATA        ;SCOPE ENTRY POINT
1792      000015      X=X+1
1793      ;*****
1794      ;TEST THAT RXCSR BIT7 IS CLEAR AND CAN BE READ RELIABLY.
1795 007722 032777 000200 171460  ATA:  BIT    #BIT7,@RXCSR    ;SEE IF RXCSR BIT7 IS CLEAR.
1796 007730 001402      BEQ    ATB        ;BRANCH IF BIT IS CLEAR.
1797 007732 104003      ERROR          ;RXCSR BIT7 IS NOT CLEAR.
1798 007734 104011      SRESET        ;RESET IF ERROR
1799 007736 104012      ATB:  SCOPE          ;SCOPE
1800 007740      TSTA    100.,AX,0
1801 007740      TSTAA   AX,100., X+1+0, X+2, X+1
1802      ;*****
1803 007740 000016      AT16:  16        ;TEST NUMBER
1804 007742 007766      AT17      ;ADDRESS OF NEXT TEST
1805 007744 000144      100.      ;ITERATION COUNT
1806 007746 007750      AXA        ;SCOPE ENTRY POINT
1807      000016      X=X+1
1808      ;*****
1809      ;TEST THAT RXCSR BIT10 IS CLEAR AND CAN BE READ RELIABLY.
1810 007750 032777 002000 171432  AXA:  BIT    #BIT10,@RXCSR    ;SEE IF RXCSR BIT10 IS CLF
1811 007756 001402      BEQ    AXB        ;BRANCH IF BIT IS CLEAR.
1812 007760 104003      ERROR          ;RXCSR BIT10 IS NOT CLEAR.
1813 007762 104011      SRESET        ;RESET BIT IF ERROR
1814 007764 104012      AXB:  SCOPE          ;SCOPE
1815 007766      TSTA    100.,AY,CD
1816 007766      TSTAA   AY,100., X+1+CD, X+2, X+1

```

```

1817 ;*****
1818 007766 100017 AT17: 100017 ;TEST NUMBER *
1819 007770 010014 AT20 ;ADDRESS OF NEXT TEST *
1820 007772 000144 100. ;ITERATION COUNT *
1821 007774 007776 AYA ;SCOPE ENTRY POINT *
1822 000017 X=X+1 ;
1823 ;*****
1824 ;TEST THAT RXCSR BIT11 IS CLEAR AND CAN BE READ RELIABLY.
1825 007776 032777 004000 171404 AYA: BIT #BIT11,@RXCSR ;SEE IF RXCSR BIT11 IS CLEAR.
1826 010004 001402 BEQ AYB ;BRANCH IF BIT IS CLEAR.
1827 010006 104003 ERROR ;RXCSR BIT11 IS NOT CLEAR.
1828 010010 104011 SRESET ;RESET BIT IF ERROR
1829 010012 104012 AYB: SCOPE ;SCOPE
1830 010014 TSTA 100.,AZ,CD
1831 010014 TSTA AZ,100., X+1+CD, X+2, X+1
1832 ;*****
1833 010014 100020 AT20: 100020 ;TEST NUMBER *
1834 010016 010042 AT21 ;ADDRESS OF NEXT TEST *
1835 010020 000144 100. ;ITERATION COUNT *
1836 010022 010024 AZA ;SCOPE ENTRY POINT *
1837 000020 X=X+1 ;
1838 ;*****
1839 ;TEST THAT RXCSR BIT14 IS CLEAR AND CAN BE READ RELIABLY.
1840 010024 032777 040000 171356 AZA: BIT #BIT14,@RXCSR ;SEE IF RXCSR BIT14 IS CLEAR.
1841 010032 001402 BEQ AZB ;BRANCH IF BIT IS CLEAR.
1842 010034 104003 ERROR ;RXCSR BIT14 IS NOT CLEAR.
1843 010036 104011 SRESET ;RESET BIT IF ERROR
1844 010040 104012 AZB: SCOPE ;SCOPE
1845 010042 TSTA 100.,AAA,CD
1846 010042 TSTA AAA,100., X+1+CD, X+2, X+1
1847 ;*****
1848 010042 100021 AT21: 100021 ;TEST NUMBER *
1849 010044 010070 AT22 ;ADDRESS OF NEXT TEST *
1850 010046 000144 100. ;ITERATION COUNT *
1851 010050 010052 AAAA ;SCOPE ENTRY POINT *
1852 000021 X=X+1 ;
1853 ;*****
1854 ;TEST THAT RXCSR BIT15 IS CLEAR AND CAN BE READ RELIABLY.
1855 010052 032777 100000 171330 AAAA: BIT #BIT15,@RXCSR ;SEE IF RXCSR BIT15 IS CLEAR.
1856 010060 001402 BEQ AAAB ;BRANCH IF BIT IS CLEAR.
1857 010062 104003 ERROR ;RXCSR BIT15 IS NOT CLEAR.
1858 010064 104011 SRESET ;RESET BIT IF ERROR
1859 010066 104012 AAAB: SCOPE ;SCOPE
1860 ;
1861 ;ALL PREVIOUS TESTS MUST HAVE BEEN RUN SUCCESSFULLY PRIOR
1862 ;TO RUNNING THE FOLLOWING TESTS. ALSO, THE JUMPER CONNECTOR
1863 ;MUST BE INSERTED IN THE DL11-E CABLE IN PLACE OF THE MODEM. COMMENTS
1864 ;REFER TO OPERATION WITH JUMPER INSERTED.
1865 ;
1866 010070 TSTA 100.,AFB,0
1867 010070 TSTA AFB,100., X+1+0, X+2, X+1
1868 ;*****
1869 010070 000022 AT22: 22 ;TEST NUMBER *
1870 010072 010154 AT23 ;ADDRESS OF NEXT TEST *
1871 010074 000144 100. ;ITERATION COUNT *
1872 010076 010100 AFBA ;SCOPE ENTRY POINT *

```

```
1873          000022          X=X+1          ;
1874          ;*****
1875          ;TEST THAT CARRIER DETECT SETS AND CLEARS WHEN DATA TERMINAL
1876          ;READY SETS AND CLEARS.
1877 010100 052777 000002 171302 AFBA: BIS #BIT1,@RXCSR ;SET DATA TERMINAL READY
1878 010106 004737 011762 JSR %7,TIME ;DELAY
1879 010112 032777 010000 171270 BIT #BIT12,@RXCSR ;TEST CARRIER DETECT
1880 010120 001002 BNE AFBB ;SHOULD BE SET
1881 010122 104003 ERROR ;WASN'T
1882 010124 000412 BR AFBC
1883 010126 042777 000002 171254 AFBB: BIC #BIT1,@RXCSR ;CLEAR DATA TERMINAL READY
1884 010134 004737 011762 JSR %7,TIME ;DELAY
1885 010140 032777 010000 171242 BIT #BIT12,@RXCSR ;TEST CARRIER DETECT
1886 010146 001401 BEQ AFBC
1887 010150 104003 ERROR ;WAS SET, ERROR
1888 010152 104012 AFBC: SCOPE
1889 010154 TSTA 100.,AGB,0
1890 010154 TSTA AGB,100., X+1+0, X+2, X+1
1891          ;*****
1892 010154 000023 AT23: 23 ;TEST NUMBER
1893 010156 010326 AT24 ;ADDRESS OF NEXT TEST
1894 010160 000144 100. ;ITERATION COUNT
1895 010162 010164 AGBA ;SCOPE ENTRY POINT
1896          X=X+1
1897          ;*****
1898          ;TEST THAT MODEM INTERRUPT (BIT 15) SETS WHEN CARRIER DETECT
1899          ;CHANGES STATE, AND IS CLEARED WHEN RXCSR IS READ.
1900 010164 042777 000002 171216 AGBA: BIC #BIT1,@RXCSR ;CLEAR DATA TERMINAL READY
1901 010172 004737 011762 JSR %7,TIME ;DELAY
1902 010176 017737 171206 001606 MOV @RXCSR,RXCSR ;READ RXCSR
1903 010204 032777 100000 171176 BIT #BIT15,@RXCSR ;TEST MODEM INTERRUPT
1904 010212 001402 BEQ AGBB ;WAS CLEAR GO TO AGBB
1905 010214 104003 ERROR ;WASN'T CLEAR
1906 010216 000442 BR AGBE ;GO TO SCOPE
1907 010220 052777 000002 171162 AGBB: BIS #BIT1,@RXCSR ;SETTING DATA TERMINAL READY
1908          ;CAUSES CARRIER DETECT TO SET
1909          ;WHICH CAUSES MODEM INTERRUPT TO SET
1910          JSR %7,TIME ;DELAY
1911 010232 017737 171152 001606 MOV @RXCSR,RXCSR ;MOVE RXCSR TO TEMPORARY LOCATION
1912 010240 032737 100000 001606 BIT #BIT15,RXCSR ;TEST MODEM INTERRUPT
1913 010246 001002 BNE AGBC ;SHOULD BE SET GO TO AGBC
1914 010250 104003 ERROR ;WAS CLEAR
1915 010252 000424 BR AGBE ;GO TO SCOPE
1916 010254 032777 100000 171126 AGBC: BIT #BIT15,@RXCSR ;MODEM INTERRUPT BIT SHOULD
1917          ;HAVE BEEN CLEARED
1918          BEQ AGBD ;IT WAS GO TO AGBD
1919 010264 104003 ERROR ;IT WASN'T
1920 010266 000416 BR AGBE ;GO TO SCOPE
1921 010270 042777 000002 171112 AGBD: BIC #BIT1,@RXCSR ;CLEARING DATA TERMINAL READY
1922          ;CAUSES CARRIER DETECT TO CLEAR
1923          ;BUT MODEM INTERRUPT WILL SET
1924 010276 004737 011762 JSR %7,TIME ;DELAY
1925 010302 017737 171102 001606 MOV @RXCSR,RXCSR ;MOV RXCSR TO TEMPORARY LOCATION
1926 010310 032737 100000 001606 BIT #BIT15,RXCSR ;TEST MODEM INTERRUPT
1927 010316 001002 BNE AGBE ;SHOULD BE SET
1928 010320 104003 ERROR ;IT WASN'T
```

```
1929 010322 000400
1930 010324 104012
1931 010326
1932 010326
1933
1934 010326 000024
1935 010330 010440
1936 010332 000144
1937 010334 010336
1938 010334 000024
1939
1940
1941
1942 010336 042777 000002 171044
1943 010344 004737 011762
1944 010350 032777 020000 171032
1945 010356 001402
1946 010360 104003
1947 010362 000425
1948 010364 052777 000002 171016
1949 010372 004737 011762
1950 010376 032777 020000 171004
1951 010404 001002
1952 010406 104003
1953 010410 000412
1954 010412 042777 000002 170770
1955 010420 004737 011762
1956 010424 032777 020000 170756
1957 010432 001401
1958 010434 104003
1959 010436 104012
1960 010440
1961 010440
1962
1963 010440 000025
1964 010442 010534
1965 010444 000144
1966 010446 010450
1967 010446 000025
1968
1969
1970
1971 010450 042777 000004 170732
1972 010456 004737 011762
1973 010462 052777 000004 170720
1974 010470 004737 011762
1975 010474 032777 040000 170706
1976 010502 001001
1977 010504 104003
1978 010506 042777 000004 170674
1979 010514 004737 011762
1980 010520 032777 040000 170662
1981 010526 001401
1982 010530 104003
1983 010532 104012
1984 010534

AGBE: BR AGBE
SCOPE ;SCOPE
TSTA 100.,AJB,0
TSTA AJB,100., X+1+0, X+2, X+1
;*****
AT24: 24 ;TEST NUMBER *
AT25 ;ADDRESS OF NEXT TEST *
100. ;ITERATION COUNT *
AJBA ;SCOPE ENTRY POINT *
X=X+1 ;
;*****
;TEST THAT CLEAR TO SEND (BIT13) SETS/CLEARs WHEN DATA TERMINAL
;READY SETS/CLEARs.
AJBA: BIC #BIT1,@RXCSR ;CLEAR DATA TERMINAL READY
JSR %7,TIME ;DELAY
BIT #BIT13,@RXCSR ;TEST CLEAR TO SEND
BEQ AJBB
ERROR ;CLEAR TO SEND SHOULD BE CLEAR
BR AJBD
AJBB: BIS #BIT1,@RXCSR ;SET DATA TERMINAL READY
JSR %7,TIME ;DELAY
BIT #BIT13,@RXCSR ;TEST CLEAR TO SEND
BNE AJBC ;BRANCH IF SET
ERROR ;CLEAR TO SEND SHOULD BE SET
BR AJBD
AJBC: BIC #BIT1,@RXCSR ;CLEAR DATA TERMINAL READY
JSR %7,TIME ;DELAY
BIT #BIT13,@RXCSR ;TEST CLEAR TO SEND
BEQ AJBD
ERROR ;CLEAR TO SEND SHOULD BE CLEAR
AJBD: SCOPE ;SCOPE
TSTA 100.,AKB,0
TSTA AKB,100., X+1+0, X+2, X+1
;*****
AT25: 25 ;TEST NUMBER *
AT26 ;ADDRESS OF NEXT TEST *
100. ;ITERATION COUNT *
AKBA ;SCOPE ENTRY POINT *
X=X+1 ;
;*****
;TEST THAT RING (BIT 14 RXCSR) SETS WHEN REQUEST TO
;SEND SETS AND CLEARs AND RESET CLEARs RING
AKBA: BIC #BIT2,@RXCSR ;CLEAR REQUEST TO SEND
JSR %7,TIME ;DELAY
BIS #BIT2,@RXCSR ;SET REQUEST TO SEND
JSR %7,TIME ;DELAY
BIT #BIT14,@RXCSR ;TEST RING
BNE AKBC
ERROR ;RING SHOULD BE SET
AKBC: BIC #BIT2,@RXCSR ;CLEAR REQUEST TO SEND
JSR %7,TIME ;DELAY
BIT #BIT14,@RXCSR ;TEST RING
BEQ .+4 ;SHOULD BE CLEAR
ERROR
SCOPE ;SCOPE
TSTA 100.,AOB,0
```

```
1985 010534          TSTAA AOB,100., X+1+0, X+2, X+1
1986          ;*****
1987 010534 000026    AT26: 26          ;TEST NUMBER
1988 010536 010646          AT27          ;ADDRESS OF NEXT TEST
1989 010540 000144          100.          ;ITERATION COUNT
1990 010542 010544          AOB.          ;SCOPE ENTRY POINT
1991          X=X+1          ;
1992          ;*****
1993          ;TEST THAT MODEM INTERRUPT (BIT 15 RXCSR) SETS WHEN RING SETS.
1994 010544 042777 000004 170636 AOB. : BIC #BIT2,@RXCSR ;CLEAR REQUEST TO SEND
1995 010552 004737 011762          : JSR %7,TIME ;DELAY
1996 010556 032777 100000 170624 : BIT #BIT15,@RXCSR ;TEST MODEM INTERRUPT BIT
1997 010564 001402          : BEQ AOB.
1998 010566 104003          : ERROR
1999 010570 000425          : BR AOB.
2000 010572 052777 000004 170610 AOB. : BIS #BIT2,@RXCSR ;SET REQUEST TO SEND
2001 010600 004737 011762          : JSR %7,TIME ;DELAY
2002 010604 032777 100000 170576 : BIT #BIT15,@RXCSR ;TEST MODEM INTERRUPT BIT
2003 010612 001002          : BNE AOB.
2004 010614 104003          : ERROR
2005 010616 000412          : BR AOB.
2006 010620 042777 000004 170562 AOB. : BIC #BIT2,@RXCSR ;CLEAR REQUEST TO SEND
2007 010626 004737 011762          : JSR %7,TIME ;DELAY
2008 010632 032777 100000 170550 : BIT #BIT15,@RXCSR ;TEST MODEM INTERRUPT BIT
2009 010640 001401          : BEQ AOB.
2010 010642 104003          : ERROR
2011 010644 104012 AOB. : SCOPE ;SCOPE
2012 010646          : TSTA 100.,ALB,0
2013 010646          : TSTAA ALB,100., X+1+0, X+2, X+1
2014          ;*****
2015 010646 000027    AT27: 27          ;TEST NUMBER
2016 010650 010760          AT30          ;ADDRESS OF NEXT TEST
2017 010652 000144          100.          ;ITERATION COUNT
2018 010654 010656          ALBA          ;SCOPE ENTRY POINT
2019          X=X+1          ;
2020          ;*****
2021          ;TEST THAT SUPERVISORY RECEIVE DATA (BIT 10 RXCSR) SETS/CLEAR
2022          ;WHEN SUPERVISORY XMIT DATA SETS/CLEAR.
2023 010656 042777 000010 170524 ALBA: BIC #BIT3,@RXCSR ;CLEAR SUPERVISOR XMIT DATA
2024 010664 004737 011762          : JSR %7,TIME ;DELAY
2025 010670 032777 002000 170512 : BIT #BIT10,@RXCSR ;TEST SUPERVISORY RECEIVE DATA.
2026 010676 001402          : BEQ ALB.
2027 010700 104003          : ERROR ;SHOULD HAVE BEEN CLEAR
2028 010702 000425          : BR ALB.
2029 010704 052777 000010 170476 ALB. : BIS #BIT3,@RXCSR ;SET SUPERVISORY XMIT DATA
2030 010712 004737 011762          : JSR %7,TIME ;DELAY
2031 010716 032777 002000 170464 : BIT #BIT10,@RXCSR ;TEST SUPERVISORY RECEIVE DATA
2032 010724 001002          : BNE ALB.
2033 010726 104003          : ERROR ;SHOULD HAVE BEEN SET
2034 010730 000412          : BR ALB.
2035 010732 042777 000010 170450 ALB. : BIC #BIT3,@RXCSR ;CLEAR SUPERVISORY XMIT DATA
2036 010740 004737 011762          : JSR %7,TIME ;DELAY
2037 010744 032777 002000 170436 : BIT #BIT10,@RXCSR ;TEST SUPERVISORY RECEIVE DATA
2038 010752 001401          : BEQ ALB.
2039 010754 104003          : ERROR ;SHOULD HAVE BEEN CLEAR
2040 010756 104012 ALB. : SCOPE ;SCOPE
```

```
2041 010760          TSTA 100.,AMB,0
2042 010760          TSTAA AMB,100., X+1+0, X+2, X+1
2043                ;*****
2044 010760 000030    AT30: 30                ;TEST NUMBER
2045 010762 011120          AT31                ;ADDRESS OF NEXT TEST
2046 010764 000144          100.                ;ITERATION COUNT
2047 010766 010770          AMBA                ;SCOPE ENTRY POINT
2048          000030          X=X+1                ;
2049                ;*****
2050                ;TEST THAT SUP REC DATA TRANSITIONS SET MODEM INTERRUPT
2051 010770 042777 000010 170412 AMBA: BIC #BIT3,@RXCSR ;CLEAR SUP REC
2052 010776 004737 011762          JSR %7,TIME ;DELAY
2053 011002 052777 000010 170400          BIS #BIT3,@RXCSR ;SET SUP REC
2054 011010 004737 011762          JSR %7,TIME ;DELAY
2055 011014 032777 100000 170366          BIT #BIT15,@RXCSR ;TEST MODEM INTERRUPT
2056 011022 001002          BNE AMBB ;MODEM INTERRUPT SHOULD BE SET
2057 011024 104003          ERROR
2058 011026 000433          BR AMBE
2059 011030 032777 100000 170352 AMBB: BIT #BIT15,@RXCSR ;MODEM INTERRUPT SHOULD BE
2060 011036 001402          BEQ AMBC ;CLEARED BY PREVIOUS READ
2061 011040 104003          ERROR
2062 011042 000425          BR AMBE
2063 011044 042777 000010 170336 AMBC: BIC #BIT3,@RXCSR ;1-0 TRANS OF SUP REC DATA
2064 011052 004737 011762          JSR %7,TIME ;DELAY
2065 011056 032777 100000 170324          BIT #BIT15,@RXCSR ;TEST MODEM INTERRUPT
2066 011064 001002          BNE AMBD ;SHOULD BE SET
2067 011066 104003          ERROR
2068 011070 000412          BR AMBE
2069 011072 052777 000010 170310 AMBD: BIS #BIT3,@RXCSR ;0-1 TRANS OF SUP REC DATA
2070 011100 004737 011762          JSR %7,TIME ;DELAY
2071 011104 032777 100000 170276          BIT #BIT15,@RXCSR ;TEST MODEM INTERRUPT
2072 011112 001001          BNE AMBE ;SHOULD BE SET
2073 011114 104003          ERROR
2074 011116 104012          AMBE: SCOPE
2075 011120          TSTA 10.,ABA,CD
2076 011120          TSTAA ABA,10., X+1+CD, X+2, X+1
2077                ;*****
2078 011120 100031    AT31: 100031                ;TEST NUMBER
2079 011122 011224          AT32                ;ADDRESS OF NEXT TEST
2080 011124 000012          10.                ;ITERATION COUNT
2081 011126 011130          ABAA                ;SCOPE ENTRY POINT
2082          000031          X=X+1                ;
2083                ;*****
2084                ;TEST THAT RESET CLEARS ALL TXCSR BITS, AND SETS BIT 7 (READY)
2085 011130 012737 000340 177776 ABAA: MOV #PRTY7,PSW ;SET PRIORITY 7.
2086 011136 012777 177777 170250          MOV #-1,@TXCSR ;SET ALL POSSIBLE BITS IN TXCSR
2087 011144 104011          SRESET ;ISSUE RESET TO CLEAR BITS
2088 011146 022777 000200 170240          CMP #BIT7,@TXCSR ;SEE IF ONLY BIT 7 IS SET.
2089 011154 001422          BEQ ABAB ;BRANCH IF ONLY BIT 7 IS SET
2090 011156 017737 170232 001604          MOV @TXCSR,TXCST ;SAVE CONTENTS OF TXCSR
2091 011164 012737 000200 001616          MOV #BIT7,TEMP ;MOVE EXPECTED TXCSR TO TEMP.
2092 011172 004537 004474          JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
2093 011176 001616          TEMP ;SOURCE ADDR.
2094 011200 015442          ATXSB ;DESTINATION ADDR.
2095 011202 000006          6 ;#OF DIGITS TO CONVERT.
2096 011204 004537 004474          JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
```

```

2097 011210 001604 TXCSR      ;SOURCE ADDR.
2098 011212 015457 ATXWAS     ;DESTINATION ADDR.
2099 011214 000006 6          ;#OF DIGITS TO CONVERT.
2100 011216 104015 ERROR1     ;RESET FAILED TO CLEAR ALL BITS EXCEPT
2101 011220 015427 ATXCSR     ;BIT 7 - SEE PRINTOUT
2102 011222 104012 ABAB: SCOPE ;SCOPE
2103 011224 TSTA 10.,ACA,0
2104 011224 TSTAA ACA,10., X+1+0, X+2, X+1
2105 *****
2106 011224 000032 AT32: 32 ;TEST NUMBER *
2107 011226 011374 AT33 ;ADDRESS OF NEXT TEST *
2108 011230 000012 10. ;ITERATION COUNT *
2109 011232 011234 ACA ;SCOPE ENTRY POINT *
2110 000032 X=X+1 ; *
2111 *****
2112 ;TEST THAT RESET CLEARS ALL RXCSR BITS EXCEPT DATA TERMINAL READY, RING
2113 ;CLEAR TO SEND,CARRIER DET
2114 011234 012737 000340 177776 ACAA: MOV #PTY7,PSW ;SET PRIORITY 7
2115 011242 042777 000002 170140 BIC #BIT1,@RXCSR ;CLEAR DATA TERM.READY
2116 011250 012777 177777 170132 MOV #-1,@RXCSR ;SET ALL POSSIBLE BITS IN RXCSR
2117 011256 052777 000004 170130 BIS #4,@TXCSR ;SET MAINT BIT
2118 011264 005077 170126 CLR @TXBUF ;TRANSMIT A CHAR
2119 011270 104020 TIMETX ;TIME OUT TX DONE
2120 011272 104003 ERROR ;ERROR DONE NOT SETTING
2121 011274 012777 000001 170114 MOV #1,@TXBUF ;TRANSMIT ANOTHER CHAR.
2122 011302 104017 TIMERX ;TIME OUT RX DONE
2123 011304 104003 ERROR ;ERROR DONE NOT SETTING
2124 011306 104011 SRESET ;ISSUE RESET TO CLEAR BITS.
2125 011310 017737 170074 001606 MOV @RXCSR,RXCSR ;MOVE RXCSR CONTENTS TO RXCSR
2126 011316 022737 030002 001606 CMP #30002,RXCSR ;SEE IF ONLY BITS 1,12,13 SET
2127 011324 001417 BEQ ACAB ;BRANCH IF ONLY BITS 1,12,13 SET.
2128 011326 012737 030002 001616 MOV #30002,TEMP
2129 011334 004537 004474 JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
2130 011340 001616 TEMP ;SOURCE ADDR.
2131 011342 015501 ARXSB ;DESTINATION ADDR.
2132 011344 000006 6 ;#OF DIGITS TO CONVERT.
2133 011346 004537 004474 JSR %5,OACNV ;GO TO OCTAL TO ASCII CONVERT.
2134 011352 001606 RXCSR ;SOURCE ADDR.
2135 011354 015516 ARXWAS ;DESTINATION ADDR.
2136 011356 000006 6 ;#OF DIGITS TO CONVERT.
2137 011360 104015 ERROR1 ;RESET FAILED TO CLEAR ALL BITS EXCEPT
2138 011362 015466 ARXCSR ;BIT 0. SEE ERROR PRINTOUT.
2139 011364 042777 000002 170016 ACAB: BIC #BIT1,@RXCSR ;CLEAR DATA TERM. READY
2140 011372 104012 SCOPE ;SCOPE
2141 011374 TSTA 10.,ADA,CD
2142 011374 TSTAA ADA,10., X+1+CD, X+2, X+1
2143 *****
2144 011374 100033 AT33: 100033 ;TEST NUMBER *
2145 011376 011454 AT34 ;ADDRESS OF NEXT TEST *
2146 011400 000012 10. ;ITERATION COUNT *
2147 011402 011404 ADAA ;SCOPE ENTRY POINT *
2148 000033 X=X+1 ; *
2149 *****
2150 ;TEST THAT LOADING TXBUF (TRANSMITTER BUFFER) CLEARS TXCSR BIT 7 (READY)
2151 ;AND WITHOUT MAINT SET THAT TXDONE SETS READY
2152 011404 005077 170006 ADAA: CLR @TXBUF ;LOAD TXBUF

```

```

2153 011410 104020          TIMETX          ;TIME OUT TX DONE
2154 011412 104003          ERROR            ;ERROR, DONE NOT SETTING
2155 011414 005077 167776   CLR             @TXBUF      ;LOAD TX BUF
2156 011420 105777 167770   TSTB            @TXCSR      ;TEST TXCSR BIT 7 (READY BIT)
2157 011424 100002          BPL             ADAB         ;BRANCH IF BIT NOT SET.
2158 011426 104003          ERROR            ;ERROR. LOADING TXBUF FAILED TO CLEAR READY.
2159 011430 000407          BR              ADAC
2160 011432 104020          ADAB: TIMETX          ;WAIT FOR DONE
2161 011434 104003          ERROR            ;DONE NEVER SET
2162 011436 032777 000200 167750   BIT        #BIT7,@TXCSR
2163 011444 001001          BNE             .+4
2164 011446 104003          ERROR            ;READY DID NOT SET
2165 011450 104011          ADAC: SRESET
2166 011452 104012          SCOPE            ;SCOPE.
2167 011454          TSTA             1.,AIA,CD
2168 011454          TSTAA            AIA,1., X+1+CD, X+2, X+1
2169 *****
2170 011454 100034          AT34: 100034          ;TEST NUMBER
2171 011456 011776          AT35          ;ADDRESS OF NEXT TEST
2172 011460 000001          1.            ;ITERATION COUNT
2173 011462 011464          AIAA          ;SCOPE ENTRY POINT
2174          X=X+1
2175 *****
2176 ;TEST THAT TRANSMIT SPEEDS ARE ARRANGED IN ASCENDING ORDER BY CHECKING THAT TIME
2177 ;TO READY BIT (TXCSR BIT 7) DECREASES AS A HIGHER SPEED IS SELECTED.
2178 011464 004737 006216   AIAA: JSR        X7,DOTHIS      ;TEST IF THIS TEST SELECTED
2179 011470 104001          TYPES
2180 011472 0.6764          MSETTX
2181 011474 017012          MSETC
2182 011476 017274          MS0
2183 011500 177777          -1
2184 011502 000000          HALT
2185 011504 004737 011712   JSR        X7,AIAS          ;OUTPUT CHAR AND TIME.
2186 011510 013737 011774 001564   MOV        AIAST,CTRO      ;MOVE ELAPSED TIME TO CTRO.
2187 011516 104000          TYPE
2188 011520 017304          MS1
2189 011522 000000          HALT
2190 011524 004737 011712   JSR        X7,AIAS          ;OUTPUT CHAR AND TIME.
2191 011530 013737 011774 001566   MOV        AIAST,CTR1      ;MOVE ELAPSED TIME TO CTR1.
2192 011536 104000          TYPE
2193 011540 017314          MS2
2194 011542 000000          HALT
2195 011544 004737 011712   JSR        X7,AIAS          ;OUTPUT CHAR AND TIME.
2196 011550 013737 011774 001570   MOV        AIAST,CTR2      ;MOVE ELAPSED TIME TO CTR2.
2197 011556 104000          TYPE
2198 011560 017324          MS3
2199 011562 000000          HALT
2200 011564 004737 011712   JSR        X7,AIAS          ;OUTPUT CHAR AND TIME.
2201 011570 013737 011774 001572   MOV        AIAST,CTR3      ;MOVE ELAPSED TIME TO CTR3.
2202 011576 104000          TYPE
2203 011600 017334          MS4
2204 011602 000000          HALT
2205 011604 004737 011712   JSR        X7,AIAS          ;OUTPUT CHAR AND TIME
2206 011610 013737 011774 001574   MOV        AIAST,CTR4      ;MOVE ELAPSED TIME TO CTR4
2207 011616 104000          TYPE
2208 011620 017344          MS5

```

```

2209 011622 000000          HALT
2210 011624 004737 011712   JSR      X7,AIAS      ;OUTPUT CHAR AND TIME
2211 011630 013737 011774 001576  MOV      AIAST,CTR5    ;MOVE ELAPSED TIME TO CTR5
2212 011636 104000          TYPE
2213 011640 017354          MS6
2214 011642 000000          HALT
2215 011644 004737 011712   JSR      X7,AIAS      ;OUTPUT CHAR AND TIME
2216 011650 013737 011774 001600  MOV      AIAST,CTR6    ;MOVE ELAPSED TIME TO CTR6
2217 011656 104000          TYPE
2218 011660 017364          MS7
2219 011662 000000          HALT
2220 011664 004737 011712   JSR      X7,AIAS      ;OUTPUT CHAR AND TIME
2221 011670 013737 011774 001602  MOV      AIAST,CTR7    ;MOVE ELAPSED TIME TO CTR7
2222 011676 004737 014424   JSR      X7,CMPT      ;CHECK THAT CTR0 THROUGH CTR7 CONTAIN
2223 011702 000402          BR        AIAF          ;DESCENDING VALUES
2224 011704 104015          ERROR1      ;TRANSMIT SPEEDS NOT ARRANGED IN
2225 011706 015526          ETXTIM      ;ASCENDING ORDER.
2226 011710 104012          AIAF:      SCOPE      ;SCOPE
2227
2228 011712 005037 011774   :AIAS:      CLR        AIAST      ;CLEAR ELAPSED TIME COUNTER.
2229 011716 105777 167472   TSTB      @TXCSR      ;WAIT FOR TX READY.
2230 011722 100375          BPL        -4
2231 011724 005077 167466   CLR        @TXBUF
2232 011730 105777 167460   TSTB      @TXCSR
2233 011734 100375          BPL        -4
2234 011736 005077 167454   CLR        @TXBUF      ;LOAD TXBUF.
2235 011742 004737 011762   AIASA:      JSR      X7,TIME      ;WAIT 75 US
2236 011746 005237 011774   INC        AIAST      ;INCREMENT ELAPSED TIME COUNTER.
2237 011752 105777 167436   TSTB      @TXCSR      ;READY SET?
2238 011756 100371          BPL        AIASA      ;BRANCH IF READY NOT SET.
2239 011760 000207          RTS        X7          ;EXIT.
2240
2241 011762 012700 000017   :TIME:      MOV      #15.,X0
2242 011766 005300          TIM1:      DEC      X0
2243 011770 001376          BNE      TIM1
2244 011772 000207          RTS        X7
2245 011774 000000          AIAST:      OPEN
2246 011776          TSTA      10.,ALA,0
2247 011776          TSTAA     ALA,10., X+1+0, X+2, X+1
2248
2249 011776 000035          *****
2250 012000 012052          AT35:      35          ;TEST NUMBER
2251 012002 000012          AT36          ;ADDRESS OF NEXT TEST
2252 012004 012006          10.          ;ITERATION COUNT
2253          ALAA          ;SCOPE ENTRY POINT
2254          X=X+1          ;
2255          *****
2256          ;TEST THAT OUTPUTTING A CHARACTER WITH THE MAINTENANCE BIT SET (TXCSR BIT 2)
2257          ;RESULTS IN DONE BIT SETTING (RXCSR BIT 7) NO LATER THAN 500 MSECS. AND
2258          ;THAT RESET INSTRUCTION CLEARS THE DONE BIT
2259 012006 052777 000004 167400  ALAA:      BIS      #BIT2,@TXCSR      ;SET MAINTENANCE BIT
2260 012014 005077 167376          CLR      @TXBUF      ;LOAD TXBUF
2261 012020 104016          DELAY      500.          ;WAIT 500 MSECS.
2262 012022 000764          TSTB      @RXCSR
2263 012024 105777 167360          BMI      ALAB      ;SEE IF DONE BIT IS SET
2264 012030 100402          BMI      ALAB      ;BRANCH IF DONE BIT IS SET

```

```

2265 012032 104003          ERROR          ;DONE BIT FAILED TO SET
2266 012034 000405          BR              ALAC
2267 012036 104011          ALAB: SRESET      ;ISSUE RESET TO CLEAR DONE BIT
2268 012040 105777 167344   TSTB      @RXCSR  ;SEE IF DONE BIT IS CLEARED
2269 012044 100001          BPL              ALAC  ;BRANCH IF DONE BIT IS CLEARED
2270 012046 104003          ERROR          ;RESET FAILED TO CLEAR DONE BIT
2271 012050 104012          ALAC: SCOPE      ;SCOPE
2272 012052          TSTA      100.,AMA,CD
2273 012052          TSTAA     AMA,100., X+1+CD, X+2, X+1
2274          ;*****
2275 012052 100036          AT36: 100036      ;TEST NUMBER
2276 012054 012116          AT37          ;ADDRESS OF NEXT TEST
2277 012056 000144          100.          ;ITERATION COUNT
2278 012060 012062          AMAA          ;SCOPE ENTRY POINT
2279          X=X+1
2280          ;*****
2281          ;TEST THAT DONE BIT (RXCSR BIT 7) IS CLEARED BY READING RXBUF.
2282          ;DONE SET BY OUTFITTING CHARACTER WITH MAINTENANCE BIT SET (TXCSR BIT 2)
2283 012062 052777 000004 167324  AMAA: BIS      #BIT2,@TXCSR ;SET MAINTENANCE BIT (TXCSR BIT 2)
2284 012070 005077 167322          CLR      @TXBUF ;LOAD TXBUF
2285 012074 104017          TIMERX        ;WAIT FOR DONE BIT TO SET.
2286 012076 104003          ERROR
2287 012100 005777 167306          TST      @RXBUF ;READ RXBUF TO CLEAR DONE BIT
2288 012104 105777 167300          TSTB     @RXCSR ;SEE IF DONE BIT IS CLEAR
2289 012110 100001          BPL          AMAC ;BRANCH IF DONE BIT IS CLEAR
2290 012112 104003          ERROR          ;READING RXBUF FAILED TO CLEAR DONE BIT
2291 012114 104012          AMAC: SCOPE      ;SCOPE
2292 012116          TSTA      100.,AOA,CD
2293 012116          TSTAA     AOA,100., X+1+CD, X+2, X+1
2294          ;*****
2295 012116 100037          AT37: 100037      ;TEST NUMBER
2296 012120 012226          AT40          ;ADDRESS OF NEXT TEST
2297 012122 000144          100.          ;ITERATION COUNT
2298 012124 012132          AOAA          ;SCOPE ENTRY POINT
2299          X=X+1
2300          ;*****
2301          ;TEST THAT RECEIVER ACTIVE SETS WHEN CHAR STARTS AND
2302          ;CLEAR WHEN RECEIVER DONE SETS
2303 012126 004737 002706          JSR      X7,CDINIT ;INIT IF C-D DEVICE
2304 012132 052777 000004 167254  AOAA: BIS      #BIT2,@TXCSR ;SET MAINT
2305 012140 005077 167252          CLR      @TXBUF ;TRANSMIT CHAR
2306 012144 005037 001616          CLR      TEMP ;CLEAR BUSY INDICATOR
2307 012150 032777 004000 167232  AOAB: BIT      #BIT11,@RXCSR ;IS RECEIVER ACTIVE SET
2308 012156 001402          BEQ      AOAB1 ;BRANCH IF CLEAR
2309 012160 005237 001616          INC      TEMP ;YES, REMEMBER THAT
2310 012164 105777 167220          AOAB1: TSTB     @RXCSR ;SEE IF DONE SET
2311 012170 100367          BPL      AOAB
2312 012172 023727 001616 000000          CMP      TEMP,#0 ;DID RECEIVER ACTIVE SET
2313 012200 001002          BNE      AOAC
2314 012202 104003          ERROR          ;RECEIVER ACTIVE NEVER SET
2315 012204 000405          BR              AOAD
2316 012206 032777 004000 167174  AOAC: BIT      #BIT11,@RXCSR ;DID DONE CLEAR ACTIVE
2317 012214 001401          BEQ      AOAD
2318 012216 104003          ERROR          ;NO, RECEIVER ACTIVE DID NOT CLEAR
2319 012220 005777 167166          AOAD: TST      @RXBUF ;CLEAR RX DONE
2320 012224 104012          SCOPE

```

```

2321 012226          TSTA 1.,AQA,0
2322 012226          TSTA AQA,1., X+1+0, X+2, X+1
2323 ;*****
2324 012226 000040    AT40: 40 ;TEST NUMBER *
2325 012230 012530    AT41 ;ADDRESS OF NEXT TEST *
2326 012232 000001    1. ;ITERATION COUNT *
2327 012234 012236    AQAA ;SCOPE ENTRY POINT *
2328 000040          X=X+1 ;
2329 ;*****
2330 ;TEST THAT RECEIVE SPEEDS ARE ARRANGED IN ASCENDING ORDER BY CHECKING THAT TIME
2331 ;ELAPSED TO DONE BIT SETTING (RXCSR BIT 7) DECREASES AS A HIGHER SPEED
2332 ;THIS IS NOT DONE IN MAINTENANCE MODE TX AND RX
2333 ;POTS MUST BE STEPPED TOGETHER
2334 ;IS SELECTED.
2335 012236 004737 006216    AQAA: JSR %7,DOTHIS ;CHECK IF THIS TEST TO BE DONE
2336 012242 104001          TYPES
2337 012244 016736          MSETRX
2338 012246 017012          MSETC
2339 012250 017274          MS0
2340 012252 177777          -1
2341 012254 000000          HALT
2342 012256 004737 012464    JSR %7,AQAS ;OUTPUT CHARACTER AND TIME DONE BIT
2343 012262 013737 012526 001564    MOV AQAST,CTR0 ;MOVE ELAPSED TIME TO CTR0
2344 012270 104000          TYPE
2345 012272 017304          MS1
2346 012274 000000          HALT
2347 012276 004737 012464    JSR %7,AQAS ;OUTPUT CHARACTER AND TIME DONE BIT
2348 012302 013737 012526 001566    MOV AQAST,CTR1 ;MOVE ELAPSED TIME TO CTR1
2349 012310 104000          TYPE
2350 012312 017314          MS2
2351 012314 000000          HALT
2352 012316 004737 012464    JSR %7,AQAS ;OUTPUT CHARACTER AND TIME DONE BIT.
2353 012322 013737 012526 001570    MOV AQAST,CTR2 ;MOVE ELAPSED TIME TO CTR2.
2354 012330 104000          TYPE
2355 012332 017324          MS3
2356 012334 000000          HALT
2357 012336 004737 012464    JSR %7,AQAS ;OUTPUT CHARACTER AND TIME DONE BIT
2358 012342 013737 012526 001572    MOV AQAST,CTR3 ;MOVE ELAPSED TIME TO CTR3.
2359 012350 104000          TYPE
2360 012352 017334          MS4
2361 012354 000000          HALT
2362 012356 004737 012464    JSR %7,AQAS
2363 012362 013737 012526 001574    MOV AQAST,CTR4
2364 012370 104000          TYPE
2365 012372 017344          MS5
2366 012374 000000          HALT
2367 012376 004737 012464    JSR %7,AQAS
2368 012402 013737 012526 001576    MOV AQAST,CTR5
2369 012410 104000          TYPE
2370 012412 017354          MS6
2371 012414 000000          HALT
2372 012416 004737 012464    JSR %7,AQAS
2373 012422 013737 012526 001600    MOV AQAST,CTR6

```

2374	012430	104000			TYPE		
2375	012432	017364			MS7		
2376	012434	000000			HALT		
2377	012436	004737	012464		JSR	%7,AQAS	
2378	012442	013737	012526	001602	MOV	AQAST,CTR7	
2379	012450	004737	014424		JSR	%7,CMPT	;CHECK THAT CTRO THROUGH CTR3 CONTAIN
2380	012454	000402			BR	AQAB	;DESCENDING VALUES.
2381	012456	104015			ERROR1		;RECEIVE SPEEDS NOT ARRANGED IN
2382	012460	015570			ERXTIM		;ASCENDING ORDER.
2383	012462	104012			SCOPE		;SCOPE
2384							
2385	012464	005037	012526		AQAS:	CLR AQAST	;CLEAR ELAPSED TIME COUNTER AQAST
2386	012470	105777	166720		TSTB	@TXCSR	;WAIT FOR TX READY.
2387	012474	100375			BPL	.-4	
2388	012476	005777	166710		TST	@RXBUF	;CLEAR DONE BIT IF SET
2389	012502	005077	166710		CLR	@TXBUF	;LOAD TXBUF
2390	012506	004737	011762		AQASA:	JSR %7,TIME	
2391	012512	005237	012526		INC	AQAST	;INCREMENT ELAPSED TIME COUNTER
2392	012516	105777	166666		TSTB	@RXCSR	;DONE SET?
2393	012522	100371			BPL	AQASA	;BRANCH IF DONE NOT SET
2394	012524	000207			RTS	%7	;EXIT
2395	012526	000000			AQAST:	OPEN	;ELAPSED TIME COUNTER
2396	012530				TSTA	10.,ARA,CD	
2397	012530				TSTAA	ARA,10., X+1+CD, X+2, X+1	
2398							
2399	012530	100041			AT41:	100041	;TEST NUMBER
2400	012532	012674				AT42	;ADDRESS OF NEXT TEST
2401	012534	000012				10.	;ITERATION COUNT
2402	012536	012540				ARAA	;SCOPE ENTRY POINT
2403		000041				X=X+1	
2404							
2405							
2406	012540	004737	012654				
2407	012544	004737	012654		ARAA:	JSR %7,ARAS	;OUTPUT CHARACTER AND WAIT 500 MSECs
2408	012550	017737	166636	001610		JSR %7,ARAS	;OUTPUT CHARACTER AND WAIT 500 MSECs
2409	012556	032737	040000	001610		MOV @RXBUF,RXBUF	;SAVE RXBUF CONTENTS + CLEAR DONE
2410	012564	001002				BIT #BIT14,RXBUF	;SEE IF DATA OVERRUN BIT WAS SET
2411	012566	104003				.-6	;BRANCH IF BIT WAS SET
2412	012570	104012					
2413	012572	005737	001610				
2414	012576	100402					
2415	012600	104003					
2416	012602	104012					
2417	012604	032777	040000	166600			
2418							
2419	012612	001002					
2420	012614	104003					
2421	012616	104012					
2422	012620	004737	012654				
2423	012624	032777	100000	166560			
2424	012632	001402					
2425	012634	104003					
2426	012636	104012					
2427	012640	032777	040000	166544			
2428	012646	001401					
2429	012650	104003					

```

2430 012652 104012          SCOPE          ;SCOPE
2431 012654 052777 000004 166532 ARAS: BIS    #BIT2,@TXCSR ;SET MAINTENANCE BIT
2432 012662 005077 166530      CLR    @TXBUF    ;LOAD TXBUF
2433 012666 104016          DELAY          ;DELAY 500 MSECS
2434 012670 000764          500.
2435 012672 000207          RTS     %7          ;EXIT
2436 012674          TSTA    10.,ATA,CD
2437 012674          TSTAA   ATA,10., X+1+CD, X+2, X+1
2438          ;*****
2439 012674 100042          AT42: 100042          ;TEST NUMBER
2440 012676 012762          AT43          ;ADDRESS OF NEXT TEST
2441 012700 000012          10.          ;ITERATION COUNT
2442 012702 012714          ATAA          ;SCOPE ENTRY POINT
2443          000042          X=X+1
2444          ;*****
2445          ;TEST THAT TRANSMITTER IS ABLE TO INTERRUPT. IF THE INTERRUPT IS SERVICED,
2446          ;IT WILL HAVE OCCURRED AT THE CORRECT VECTOR.
2447 012704 004737 003516          JSR     7,OVRLAY          ;GO TO OVER LAY ROUTINE
2448 012710 104007          STTXV          ;SET TX INTERRUPT SERVICE
2449 012712 012750          ATAC          ;TO ATAC
2450 012714 042777 000100 166472 ATAA: BIC    #BIT6,@TXCSR ;DISABLE TX INTERRUPT
2451 012722 005037 177776      CLR    PSW          ;SET PROCESSOR PRIORITY TO 0
2452 012726 05 777 000100 166460      BIS    #BIT6,@TXCSR ;ENABLE TX INTERRUPT
2453 012734 000240          NOP
2454 012736 104003          ERROR          ;READY DID NOT CAUSE AN INTERRUPT
2455 012740 042777 000100 166446      BIC    #BIT6,@TXCSR
2456 012746 104012          ATAB: SCOPE          ;SCOPE
2457 012750 042777 000100 166436 ATAC: BIC    #BIT6,@TXCSR ;HERE IF INT, DISABLE TX INT
2458 012756 022626          POPSP2
2459 012760 000772          BR     ATAB
2460 012762          TSTA    1000.,AUA,CD
2461 012762          TSTAA   AUA,1000., X+1+CD, X+2, X+1
2462          ;*****
2463 012762 100043          AT43: 100043          ;TEST NUMBER
2464 012764 013040          AT44          ;ADDRESS OF NEXT TEST
2465 012766 001750          1000.          ;ITERATION COUNT
2466 012770 012776          AUAA          ;SCOPE ENTRY POINT
2467          000043          X=X+1
2468          ;*****
2469          ;TEST THAT READY DOES NOT CAUSE AN INTERRUPT WHEN THE PROCESSOR IS
2470          ;AT THE SAME PRIORITY AS THE TRANSMITTER INTERRUPT REQUEST LEVEL
2471 012772 104007          STTXV          ;SET TX INTERRUPT SERVICE TO
2472 012774 013032          AUAC
2473 012776 013737 001426 177776 AUAA: MOV     TXLVL,PSW          ;SET PROCESSOR PRIORITY SAME AS TX PRIORITY
2474 013004 042777 000100 166402      BIC    #BIT6,@TXCSR
2475 013012 052777 000100 166374      BIS    #BIT6,@TXCSR ;ENABLE TX INTERRUPTS
2476 013020 000240          NOP
2477 013022 042777 000100 166364 AUAB: BIC    #BIT6,@TXCSR ;OK IF NO INTERRUPT OCCURS. DISABLE INTERRUPTS
2478 013030 104012          SCOPE          ;SCOPE
2479 013032 022626          AUAC: POPSP2          ;HERE IF INTERRUPT OCCURS. POP STOCK TWICE
2480 013034 104003          ERROR          ;TX INTERRUPTED WITH PROCESSOR AT SAME
2481 013036 000771          BR     AUAB          ;PRIORITY AS THE TRANSMITTER
2482 013040          TSTA    10.,AVA,CD
2483 013040          TSTAA   AVA,10., X+1+CD, X+2, X+1
2484          ;*****
2485 013040 100044          AT44: 100044          ;TEST NUMBER

```

```
2486 013042 013124          AT45          ;ADDRESS OF NEXT TEST          *
2487 013044 000012          10.          ;ITERATION COUNT              *
2488 013046 013054          AVAA          ;SCOPE ENTRY POINT              *
2489          000044          X=X+1          ;                              *
2490          ;*****
2491          ;TEST THAT TRANSMITTER INTERRUPTS WHEN PROCESSOR IS AT PRIORITY ONE LEVEL
2492          ;LOWER THAN THE TRANSMITTER INTERRUPT PRIORITY.
2493 013050 104007          STTXV          ;SET TX INTERRUPT SERVICE TO AVAB
2494 013052 013112          AVAB
2495 013054 042777 000100 166332 AVAA: BIC #BIT6,@TXCSR ;DISABLE TX INTERRUPTS
2496 013062 013737 001426 177776      MOV TXLVL,PSW ;SET PROCESSOR PRIORITY TO ONE LEVEL
2497 013070 162737 000040 177776      SUB #40,PSW ;LOWER THAN TX PRIORITY
2498 013076 052777 000100 166310      BIS #BIT6,@TXCSR ;ENABLE TX INTERRUPTS
2499 013104 000240          NOP
2500 013106 104003          ERROR          ;TX FAILED TO INTERRUPT
2501 013110 000401          BR AVAC
2502 013112 022626          AVAB: POPSP2 ;HERE IF INTERRUPT OCCURS. POP STOCK TWICE
2503 013114 042777 000100 166272 AVAC: BIC #BIT6,@TXCSR ;DISABLE TX INTERRUPTS
2504 013122 104012          SCOPE          ;SCOPE
2505 013124          TSTA 100.,AWA,CD
2506 013124          TSTAA AWA,100., X+1+CD, X+2, X+1
2507          ;*****
2508 013124 100045          AT45: 100045 ;TEST NUMBER                      *
2509 013126 013222          AT46          ;ADDRESS OF NEXT TEST          *
2510 013130 000144          100.          ;ITERATION COUNT              *
2511 013132 013134          AWAA          ;SCOPE ENTRY POINT              *
2512          000045          X=X+1          ;                              *
2513          ;*****
2514          ;TEST THAT TRANSMITTER DOES NOT REINTERRUPT AFTER THE INITIAL INTERRUPT HAS
2515          ;OCCURRED AND HAS BEEN SERVICED.
2516 013134 104007          AWAA: STTXV          ;SET TX INTERRUPT SERVICE TO AWAC
2517 013136 013174          AWAC
2518 013140 042777 000100 166246      BIC #BIT6,@TXCSR ;DISABLE TX INTERRUPTS
2519 013146 005037 177776      CLR PSW ;SET PROCESSOR PRIORITY TO 0
2520 013152 052777 000100 166234      BIS #BIT6,@TXCSR ;ENABLE TX INTERRUPTS
2521 013160 000240          NOP
2522 013162 104003          ERROR          ;TRANSMITTER FAILED TO INTERRUPT
2523 013164 042777 000100 166222 AWAB: BIC #BIT6,@TXCSR ;DISABLE TX INTERRUPTS
2524 013172 104012          SCOPE          ;SCOPE
2525 013174 012777 013214 166222 AWAC: MOV #AWAE,@TXVTR ;HERE IF INTERRUPT OCCURS. CHANGE EXIT
2526 013202 012716 013210      MOV #AWAD,@X6 ;POINTER TO AWAD AND EXIT INTERRUPT
2527 013206 000002          RTI
2528 013210 000240          AWAD: NOP          ;OK IF NO INTERRUPT REOCCURS.
2529 013212 000764          BR AWAB
2530 013214 022626          AWAE: POPSP2 ;HERE IF INTERRUPT REOCCURS
2531 013216 104003          ERROR          ;TX REINTERRUPTED AFTER RTI
2532 013220 000761          BR AWAB
2533 013222          TSTA 10.,AXA,CD
2534 013222          TSTAA AXA,10., X+1+CD, X+2, X+1
2535          ;*****
2536 013222 100046          AT46: 100046 ;TEST NUMBER                      *
2537 013224 013306          AT47          ;ADDRESS OF NEXT TEST          *
2538 013226 000012          10.          ;ITERATION COUNT              *
2539 013230 013246          AXAA          ;SCOPE ENTRY POINT              *
2540          000046          X=X+1          ;                              *
2541          ;*****
```

```
2542 ;TEST THAT RECEIVER DONE BIT IS ABLE TO INTERRUPT. IF THE INTERRUPT IS
2543 ;SERVICED IT WILL HAVE OCCURRED AT THE CORRECT VECTOR.
2544 013232 004737 003516 JSR 7,OVRLAY ;GO TO OVERLAY ROUTINE
2545 013236 104006 STRXV ;SET RX INTERRUPT SERVICE TO AXAB
2546 013240 013274 AXAB
2547 013242 004737 014404 JSR X7,STRXD ;SET RX DONE BIT
2548 013246 042777 000100 166134 AXAA: BIC #BIT6,@RXCSR ;DISABLE RX INTERRUPTS
2549 013254 005037 177776 CLR PSW ;SET PROCESSOR PRIORITY TO 0
2550 013260 052777 000100 166122 BIS #BIT6,@RXCSR ;ENABLE RX INTERRUPTS
2551 013266 000240 NOP
2552 013270 104003 ERROR ;RX FAILED TO INTERRUPT
2553 013272 000401 BR AXAC
2554 013274 022626 AXAB: POPSP2 ;HERE IF INTERRUPT OCCURS
2555 013276 042777 000100 166104 AXAC: BIC #BIT6,@RXCSR ;DISABLE INT EN
2556 013304 104012 SCOPE ;SCOPE
2557 013306 TSTA 10.,AX1,0
2558 013306 TSTA AX1,10., X+1+0, X+2, X+1
2559 ;*****
2560 013306 000047 AT47: 47 ;TEST NUMBER *
2561 013310 013370 AT50 ;ADDRESS OF NEXT TEST *
2562 013312 000012 10. ;ITERATION COUNT *
2563 013314 013326 AX1A ;SCOPE ENTRY POINT *
2564 000047 X=X+1 ;
2565 ;*****
2566 ;TEST THAT MODEM INTERRUPT BIT IS ABLE TO INTERRUPT. IF THE INTERRUPT IS
2567 ;SERVICED IT WILL HAVE OCCURRED AT THE CORRECT VECTOR.
2568 013316 004737 003516 JSR 7,OVRLAY ;GO TO OVERLAY ROUTINE
2569 013322 104006 STRXV ;SET RX INTERRUPT SERVICE TO AXAB
2570 013324 013356 AX1B
2571 013326 042777 000044 166054 AX1A: BIC #44,@RXCSR ;DISABLE MODEM INTERRUPTS
2572 013334 005037 177776 CLR PSW ;SET PROCESSOR PRIORITY TO 0
2573 013340 052777 000044 166042 BIS #44,@RXCSR ;ENABLE MODEM INTERRUPTS,RQ TO SND
2574 013346 104016 DELAY
2575 013350 000005 5.
2576 013352 104003 ERROR ;MODEM FAILED TO INTERRUPT
2577 013354 000401 BR AX1C
2578 013356 022626 AX1B: POPSP2 ;HERE IF INTERRUPT OCCURS
2579 013360 042777 000040 166022 AX1C: BIC #BIT5,@RXCSR ;DISABLE INT EN
2580 013366 104012 SCOPE
2581 013370 TSTA 1000.,AYA,CD
2582 013370 TSTA AYA,1000., X+1+CD, X+2, X+1
2583 ;*****
2584 013370 100050 AT50: 100050 ;TEST NUMBER *
2585 013372 013452 AT51 ;ADDRESS OF NEXT TEST *
2586 013374 001750 1000. ;ITERATION COUNT *
2587 013376 013410 AYAA ;SCOPE ENTRY POINT *
2588 000050 X=X+1 ;
2589 ;*****
2590 ;TEST THAT RECEIVER DONE BIT DOES NOT CAUSE AN INTERRUPT WHEN THE PROCESSOR
2591 ;IS AT THE SAME PRIORITY LEVEL AS THE RECEIVER INTERRUPT REQUEST LEVEL
2592 013400 104006 STRXV ;SET RX INTERRUPT SERVICE TO AYAC
2593 013402 013444 AYAC
2594 013404 004737 014404 JSR X7,STRXD ;SET RX DONE BIT
2595 013410 042777 000100 165772 AYAA: BIC #BIT6,@RXCSR ;DISABLE RX INTERRUPTS
2596 013416 013737 001422 177776 MOV RXLVL,PSW ;SET PROCESSOR PRIORITY SAME AS RECEIVER'S
2597 013424 052777 000100 165756 BIS #BIT6,@RXCSR ;ENABLE RX INTERRUPTS
```

```
2598 013432 000240      NOP
2599 013434 042777 000100 165746 AYAB: BIC #BIT6,@RXCSR ;OK IF NO INTERRUPT. DISABLE RX INTERRUPTS
2600 013442 104012      SCOPE ;SCOPE
2601 013444 022626      AYAC: POPSP2 ;HERE IF INTERRUPT OCCURS. POP STOCK TWICE
2602 013446 104003      ERROR ;RX INTERRUPTED WITH PROCESOR AT SAME
2603 013450 000771      BR AYAB ;PRIORITY AS THE RECEIVER
2604 013452      TSTA 10.,AZA,CD
2605 013452      TSTAA AZA,10., X+1+CD, X+2, X+1
2606 *****
2607 013452 100051      AT51: 100051 ;TEST NUMBER *
2608 013454 013542      AT52 ;ADDRESS OF NEXT TEST *
2609 013456 000012      10. ;ITERATION COUNT *
2610 013460 013472      AZAA ;SCOPE ENTRY POINT *
2611 000051      X=X+1 ;
2612 *****
2613 ;TEST THAT RECEIVER DONE BIT CAUSES INTERRUPT WHEN PROCESSOR IS AT PRIORITY
2614 ;ONE LEVEL LOWER THAN THE RECEIVER'S INTERRUPT REQUEST LEVEL
2615 013462 104006      STRXV ;SET RX INTERRUPT TO AZAB
2616 013464 013530      AZAB
2617 013466 004737 014404      JSR %7,STRXD ;SET RX DONE BIT
2618 013472 042777 000100 165710 AZAA: BIC #BIT6,@RXCSR ;DISABLE RX INTERRUPTS
2619 013500 013737 001422 177776      MOV RXLVL,PSW ;SET PROCESSOR PRIORITY ONE LEVEL
2620 013506 162737 000040 177776      SUB #40,PSW ;LOWER THAN RECEIVER'S PRIORITY
2621 013514 052777 000100 165666      BIS #BIT6,@RXCSR ;ENABLE RX INTERRUPTS
2622 013522 000240      NOP
2623 013524 104003      ERROR ;RX FAILED TO INTERRUPT WITH PROCESSOR AT
2624 013526 000401      BR AZAC ;PRIORITY ONE LEVEL LOWER THAN RECEIVER'S
2625 013530 022626      AYAB: POPSP2 ;HERE IF INTERRUPT OCCURS
2626 013532 042777 000100 165650 AZAC: BIC #BIT6,@RXCSR ;DISABLE RX INTERRUPTS
2627 013540 104012      SCOPE ;SCOPE
2628 013542      TSTA 100.,AAB,CD
2629 013542      TSTAA AAB,100., X+1+CD, X+2, X+1
2630 *****
2631 013542 100052      AT52: 100052 ;TEST NUMBER *
2632 013544 013640      AT53 ;ADDRESS OF NEXT TEST *
2633 013546 000144      100. ;ITERATION COUNT *
2634 013550 013556      AABA ;SCOPE ENTRY POINT *
2635 000052      X=X+1 ;
2636 *****
2637 ;TEST THAT RECEIVER DOES NOT INTERRUPT AFTER THE INITIAL INTERRUPT HAS
2638 ;OCCURED AND DONE BIT HAS NOT BEEN CLEARED
2639 013552 004737 014404      JSR %7,STRXD ;SET RX DONE BIT
2640 013556 104006      AABA: STRXV ;SET RX INTERRUPT SERVICE TO AABC
2641 013560 013612      AABC
2642 013562 042777 000100 165620      BIC #BIT6,@RXCSR ;DISABLE RX INTERRUPTS
2643 013570 052777 000100 165612      BIS #BIT6,@RXCSR ;ENABLE RX INTERRUPTS
2644 013576 000240      NOP
2645 013600 104003      ERROR ;RX FAILED TO INTERRUPT
2646 013602 042777 000100 165600 AABB: BIC #BIT6,@RXCSR ;DISABLE RX INTERRUPTS
2647 013610 104012      SCOPE ;SCOPE
2648 013612 012777 013632 165600 AABC: MOV #AABE,@RXVTR ;HERE IF INTERRUPT OCCURS. CHANGE SERVICE TO
2649 013620 012716 013626      MOV #AABD,%6 ;AABE, SET EXIT POINTER TO AABD
2650 013624 000002      RTI ;EXIT INTERRUPT SERVICE
2651 013626 000240      AABD: NOP ;OK IF NO INTERRUPT REOCCURS
2652 013630 000764      BR AABB
2653 013632 022626      AABE: POPSP2 ;HERE IF INTERRUPT REOCCURS
```

```
2654 013634 104003          ERROR                      ;RX REINTERRUPTED AFTER RTI
2655 013636 000761          BR      P'BB
2656 013640                TSTA      100.,ABB,CD
2657 013640                TSTA      ABB,100., X+1+CD, X+2, X+1
2658
2659 013640 100053          ;*****
AT53: 100053                ;TEST NUMBER
2660 013642 013700          AT54                ;ADDRESS OF NEXT TEST
2661 013644 000144          100.                ;ITERATION COUNT
2662 013646 013650          ABBA                ;SCOPE ENTRY POINT
2663                X=X+1
2664
2665          ;*****
2665          ;TEST THAT READING RXCSR DOES NOT CLEAR DONE BIT (RXCSR BIT 7 )
2666 013650 004737 014404  ABBA: JSR      X7,STRXD          ;SET RX DONE BIT
2667 013654 017737 165530 001606 MOV      @RXCSR,RXCSRT      ;SAVE CONTENT OF RXCSR
2668 013662 105777 165522 TSTB      @RXCSR          ;SEE IF DONE BIT IS CLEAR
2669 013666 100401          BMI      ABBB          ;BRANCH IF DONE BIT IS NOT CLEAR
2670 013670 104003          ERROR
2671 013672 005777 165514  ABBB: TST      @RXBUF          ;CLEAR DONE BIT IF SET
2672 013676 104012          SCOPE                ;SCOPE
2673 013700                TSTA      100.,ACB,CD
2674 013700                TSTA      ABB,100., X+1+CD, X+2, X+1
2675
2676 013700 100054          ;*****
AT54: 100054                ;TEST NUMBER
2677 013702 013764          AT55                ;ADDRESS OF NEXT TEST
2678 013704 000144          100.                ;ITERATION COUNT
2679 013706 013714          ACBA                ;SCOPE ENTRY POINT
2680                X=X+1
2681
2682          ;*****
2682          ;TEST THAT DONE CAN CAUSE INT WITH ERROR SET
2683 013710 104006          STRXV                ;SET RX INTERRUPT SERVICE TO ACBB.
2684 013712 013752          ACBB
2685 013714 004737 014404  ACBA: JSR      X7,STRXD          ;SET RX DONE BIT
2686 013720 004737 014404 JSR      X7,STRXD          ;SET RX DATA OFLOW
2687 013724 042777 000100 165456 BIC      #BIT6,@RXCSR      ;DISABLE RX INTERRUPTS
2688 013732 005037 177776 CLR      PSW          ;SET PROCESSOR PRIORITY TO 0
2689 013736 052777 000100 165444 BIS      #BIT6,@RXCSR      ;ENABLE RX INTERRUPTS
2690 013744 000240          NOP
2691 013746 104003          ERROR                ;RX DONE FAILED TO CAUSE INTERRUPT
2692 013750 000401          BR      ACBC
2693 013752 022626          ACBB: POPSP2          ;HERE IF INTERRUPT OCCURS. POP STOCK TWICE
2694 013754 042777 000100 165426 ACBC: BIC      #BIT6,@RXCSR
2695 013762 104012          SCOPE
2696 013764                TSTA      3.,ADD,CD
2697 013764                TSTA      ADD,3., X+1+CD, X+2, X+1
2698
2699 013764 100055          ;*****
AT55: 100055                ;TEST NUMBER
2700 013766 014006          AT56                ;ADDRESS OF NEXT TEST
2701 013770 000003          3.                ;ITERATION COUNT
2702 013772 014000          ADDA                ;SCOPE ENTRY POINT
2703                X=X+1
2704
2705          ;*****
2705          ;DATA TEST USING NORMAL CONFIGURATION
2706 013774 004737 002706 ADDA: JSR      X7,CDINIT          ;INIT IF C-D DEVICE
2707 014000 004537 004770 JSR      5,DATTST
2708 014004 104012          SCOPE
2709 014006                TSTA      3.,APB,0
```

```
2710 014006          TSTAA  APB,3., X+1+0, X+2, X+1
2711                ;*****
2712 014006 000056    AT56:  56          ;TEST NUMBER
2713 014010 014100          AT57          ;ADDRESS OF NEXT TEST
2714 014012 000003          3.          ;ITERATION COUNT
2715 014014 014022          APBA          ;SCOPE ENTRY POINT
2716          000056          X=X+1
2717                ;*****
2718                ;DATA TEST USING JUMPER CONNECTOR.
2719                ;USES SPECIAL BINARY COUNT PATTERN FOR DATA. NO INTERRUPT.
2720 014016 004737 004322    JSR      7,INBIN      ;INITIALIZE BINARY COUNT PATTERN
2721 014022 012737 001750 001564 APBA:  MOV      #1000.,CTRO ;SET CHARACTER COUNT TO 1000
2722 014030 104020          APBB:  TIMETX      ;TIME OUT TX DONE
2723 014032 104003          ERROR      ;ERROR DONE NOT SETTING
2724 014034 004737 004426    JSR      7,GTBINP      ;GET BINARY CHARACTER
2725 014040 110137 001560    MOV      X1,CRBUFA    ;SAVE CHAR IN CRBUFA AND
2726 014044 004737 005374    JSR      7,MASKIT      ;MASK OFF NON TRANSMITTED BITS
2727 014050 110177 165342    MOV      X1,@TXBUF    ;LOAD CHAR.
2728 014054 104017          TIMERX      ;TIME OUT RX DONE
2729 014056 104003          ERROR      ;ERROR DONE NOT SETTING
2730 014060 117737 165326 001556    MOV      @RXBUF,CRBUF ;LOAD RECEIVED DATA INTO CRBUF
2731 014066 104004          DATCHK      ;CHECK DATA
2732 014070 005337 001564    DEC      CTRO          ;TESTED 1000 CHARACTERS
2733 014074 001355          BNE      APBB          ;BRANCH IF NOT
2734 014076 104012          SCOPE          ;YES. SCOPE
2735 014100          TSTA   3.,EXT,0
2736 014100          TSTAA  EXT,3., X+1+0, X+2, X+1
2737                ;*****
2738 014100 000057    AT57:  57          ;TEST NUMBER
2739 014102 014164          AT60          ;ADDRESS OF NEXT TEST
2740 014104 000003          3.          ;ITERATION COUNT
2741 014106 014110          EXTA          ;SCOPE ENTRY POINT
2742          000057          X=X+1
2743                ;*****
2744
2745                ;TEST THAT RDR BUSY TURNS OFF RDR ENABLE
2746                ;WHEN RUN ON AN XOR TESTER
2747 014110 000005    EXTA:  RESET          ;RESET
2748 014112 005277 165272          INC      @RXCSR      ;SET RDR ENABLE, SEE IF RDE IS TURNED OFF BY RDR BUSY
2749 014116 012737 177770 014154    MOV      #-10,3$+2
2750 014124 005237 014154    2$:  INC      3$+2          ;WAIT LOOP FOR XOR TESTER
2751 014130 001375          BNE      2$
2752 014132 005077 165260          CLR      @TXBUF      ;SHIP OUT CHAR.
2753 014136 012737 130000 014154    MOV      #-50000,3$+2
2754 014144 105777 165240    5$:  TSTB      @RXCSR      ;TEST COMPLETE
2755 014150 100404          BMI      6$
2756 014152 005227 177770    3$:  INC      #-10          ;ALLOW TIME FOR RDR DONE TO SET
2757 014156 001372          BNE      5$
2758 014160 104003          ERROR          ;FAILURE OF RDR DONE TO SET
2759 014162 104012          6$:  SCOPE
2760 014164          TSTA   10.,EX,0
2761 014164          TSTAA  EX,10., X+1+0, X+2, X+1
2762                ;*****
2763 014164 000060    AT60:  60          ;TEST NUMBER
2764 014166 014234          AT61          ;ADDRESS OF NEXT TEST
2765 014170 000012          10.          ;ITERATION COUNT
```

```

2766 014172 014174          EXA          ;SCOPE ENTRY POINT          *
2767          000060          X=X+1          ;                          *
2768          ;*****
2769          ;TEST THAT WHEN RDR ENABLE IS SET THAT THE RXCSR DONE
2770          ;BIT IS CLEARED
2771 014174 000005          EXA:  RESET
2772 014176 004737 014404      JSR      PC,STRXD          ;SET RCVR DONE
2773 014202 005277 165202      INC      @RXCSR          ;SET ENABLE
2774 014206 105777 165176      TSTB     @RXCSR          ;DONE SHOULD CLEAR
2775 014212 100001          BPL      1$
2776 014214 104003          ERROR          ;DONE NOT CLEAR
2777 014216 012737 177770 014226 1$:  MOV      #-10,3$+2
2778 014224 005227 177770      3$:  INC      #-10          ;WAIT 100MIC. SEC. FOR XOR
2779 014230 001375          BNE      3$
2780 014232 104012          SCOPE
2781 014234          TSTA     3.,EXA,C
2782 014234          TSTAA    EXA,3., X+1+0, X+2, X+1
2783          ;*****
2784 014234 000061          AT61:  61          ;TEST NUMBER          *
2785 014236 014270          AT62          ;ADDRESS OF NEXT TEST      *
2786 014240 000003          3.          ;ITERATION COUNT          *
2787 014242 014244          EXAA          ;SCOPE ENTRY POINT          *
2788          000061          X=X+1          ;                          *
2789          ;*****
2790 014244 005737 002016      EXAA:  TST      XORFLG          ;CHECKING JUMPER CONNECTIONS FOR XOR, RCVR
2791 014250 100006          BPL      3$
2792 014252 012777 177777 165130      MOV      #-1,@RXCSR
2793 014260 005777 165124      TST      @RXCSR
2794 014264 000005          RESET
2795 014266 104012          3$:  SCOPE
2796 014270          TSTA     3.,EXB,0
2797 014270          TSTAA    EXB,3., X+1+0, X+2, X+1
2798          ;*****
2799 014270 000062          AT62:  62          ;TEST NUMBER          *
2800 014272 014324          AT63          ;ADDRESS OF NEXT TEST      *
2801 014274 000003          3.          ;ITERATION COUNT          *
2802 014276 014300          EXBA          ;SCOPE ENTRY POINT          *
2803          000062          X=X+1          ;                          *
2804          ;*****
2805 014300 005737 002016      EXBA:  TST      XORFLG          ;SAME AS ABOVE BUT FOR XMTR
2806 014304 100006          BPL      4$
2807 014306 012777 177677 165100      MOV      #177677,@TXCSR
2808 014314 005777 165074      TST      @TXCSR
2809 014320 000005          RESET
2810 014322 104012          4$:  SCOPE
2811 014324          TSTAA    AQB,10., X+1+CD, LAST, X+1
2812          ;*****
2813 014324 100063          AT63:  100063          ;TEST NUMBER          *
2814 014326 177777          ATLAST          ;ADDRESS OF NEXT TEST      *
2815 014330 000012          10.          ;ITERATION COUNT          *
2816 014332 014334          AQBA          ;SCOPE ENTRY POINT          *
2817          000063          X=X+1          ;                          *
2818          ;*****
2819          ;TEST THAT WHEN TXCSR BIT 0 IS SET THAT THE OUTPUT DATA LINE
2820          ;IS PULLED TO A SPACE.
2821 014334 004737 002706      AQBA:  JSR      %7,CDINIT          ;INIT IF C-D DEVICE

```

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 53
CZDLAG.P11 30-MAR-78 08:51

SEQ 0053

2822	014340	052777	000004	165046	BIS	#BIT2,@TXCSR	;SET MAINTENANCE BIT IN TXCSR
2823	014346	052777	000001	165040	BIS	#BIT0,@TXCSR	;SET BREAK BIT
2824	014354	012777	000252	165034	MOV	#252,@TXBUF	;LOAD BUFFER
2825	014362	104017			TIMERX		;TIME OUT RX DONE
2826	014364	104003			ERROR		;FRROR DONE NOT SETTING
2827	014366	127727	165020	000000	CMPB	@RXBUF,#0	;CHARACTER RECEIVED SHOULD BE 0
2828	014374	001401			BEQ	.+4	
2829	014376	104003			ERROR		;CHARACTER OTHER THAN 0
2830	014400	104011			SRESET		;ISSUE RESET
2831	014402	104012			SCOPE		

```

2832
2833      ; SUBROUTINE TO SET RXCSR DONE BIT.
2834 014404 052777 000004 165002 STRXD: BIS    #BIT2,@TXCSR ; SET MAINTENANCE BIT.
2835 014412 005077 165000      CLR    @TXBUF      ; LOAD TXBUF.
2836 014416 104017      TIMERX      ; TIME OUT TX DONE
2837 014420 104003      ERROR        ; ERROR DONE NOT SETTING
2838 014422 000207      RTS    %7      ; EXIT.
2839      ; SUBROUTINE TO CHECK THAT CTRO THROUGH CTR3 CONTAIN DESCENDING VALUES.
2840 014424 023737 001564 001566 CMPT:  CMP    CTRO,CTR1
2841 014432 101430      BLOS    CMPTNG
2842 014434 023737 001566 001570      CMP    CTR1,CTR2
2843 014442 101424      BLOS    CMPTNG
2844 014444 023737 001570 001572      CMP    CTR2,CTR3
2845 014452 101420      BLOS    CMPTNG
2846 014454 023737 001572 001574      CMP    CTR3,CTR4
2847 014462 101414      BLOS    CMPTNG
2848 014464 023737 001574 001576      CMP    CTR4,CTR5
2849 014472 101410      BLOS    CMPTNG
2850 014474 023737 001576 001600      CMP    CTR5,CTR6
2851 014502 101404      BLOS    CMPTNG
2852 014504 023737 001600 001602      CMP    CTR6,CTR7
2853 014512 101002      BHI     CMPTOK
2854 014514 062716 000002      CMPTNG: ADD    #2,%6
2855 014520 000207      CMPTOK: RTS    %7

```

```

2856
2857
2858
2859
2860 014522 104000
2861 014524 015632
2862 014526 004537 004132
2863 014532 104000
2864 014534 015727
2865 014536 004737 003554
2866 014542 012637 001622
2867 014546 113737 001622 014570
2868 014554 113777 001623 164634
2869 014562 105777 164626
2870 014566 104016
2871 014570 000000
2872 014572 000765
2873
2874
2875
2876 014574 104000
2877 014576 015672
2878 014600 004537 004132
2879 014604 104000
2880 014606 015727
2881 014610 004737 003554
2882 014614 012637 001622
2883 014620 052777 000004 164566
2884 014626 113737 001622 014650
2885 014634 113777 001623 164554
2886 014642 105777 164546
2887 014646 104016
2888 014650 000000
2889 014652 017700 164534
2890 014656 000005
2891 014660 000005
2892 014662 000005
2893 014664 000005
2894 014666 000005
2895 014670 000753

;*****
;PRG1 - TRANSMITTER SCOPE LOOP
;*****
PRG1:  TYPE
      P1TIT
      JSR 5,LINSLX
      TYPE
      SELCAD
      JSR PC,RDOCT
      MOV (SP)+,TEMP2
      PRG1A: MOVB TEMP2,PRG1B
      MOVB TEMP2+1,@TXBUF
      TSTB @TXCSR
      DELAY
      PRG1B: OPEN
      BR PRG1A
;TYPE PROGRAM TITLE.
;GO GET LINE # FROM USER
;TYPE SELECT CHAR AND DELAY.
;READ IN DATA.
;STORE DATA.
;DELAY COUNT TO PRG1B.
;LOAD TXBUF.
;TEST FOR DONE. ;:++G
;DELAY # OF MSECS. SET AT SR.
;REPEAT.

;*****
;PRG2 - RECEIVER SCOPE LOOP.
;*****
PRG2:  TYPE
      P2TIT
      JSR 5,LINSLX
      TYPE
      SELCAD
      JSR PC,RDOCT
      MOV (SP)+,TEMP2
      PRG2A: BIS #BIT2,@TXCSR
      MOVB TEMP2,PRG2B
      MOVB TEMP2+1,@TXBUF
      TSTB @TXCSR
      DELAY
      PRG2B: OPEN
      MOV @RXBUF,X0
      RESET
      RESET
      RESET
      RESET
      BR PRG2A
;TYPE PROGRAM TITLE.
;GO GET LINE # FROM USER
;TYPE SELECT CHAR AND DELAY.
;READ IN DATA.
;STORE DATA.
;SET MAINTENANCE BIT.
;DELAY COUNT TO PRG2B.
;LOAD TXBUF.
;TEST FOR DONE ;:++G
;DELAY # OF MSECS. SET IN SR.
;RXBUF CONTENTS TO R0.
;DISPLAY CONTENTS OF RXBUF (IN R0).
;BY ISSUING 5 RESET INSTRUCTIONS

```

```
2896
2897
2898 ;*****
2899 ;PRG3 - SINGLE CHARACTER MAINTENANCE MODE DATA TEST.
2900 ;*****
2900 014672 104000 PRG3: TYPE ;TYPE PROGRAM TITLE.
2901 014674 016475 P3TIT
2902 014676 004537 004132 JSR 5,LINSLX ;GC GET LINE # FROM USER
2903 014702 104000 TYPE ;TYPE: SELECT CHARACTER.
2904 014704 016620 SELCAR
2905 014706 004737 003554 JSR P.,RDOCT ;GET TEST CHAR AND DELAY FROM USER.
2906 014712 012637 001622 MOV (SP)+,TEMP2 ;STORE TEST CHAR AND DELAY.
2907 014716 113737 001623 001560 PRG3A: MOVB TEMP2+1,CBUBFA ;MOVE DATA CHAR TO CBUBFA.
2908 014724 004737 014764 JSR %7,MOUTIN ;GO OUTPUT, RECEIVE, AND CHECK DATA.
2909 014730 000772 BR PRG3A
2910 ;*****
2911 ;PRG4 - SPECIAL BINARY COUNT MAINTENANCE MODE DATA TEST.
2912 ;*****
2913 014732 104000 PRG4: TYPE ;TYPE PROGRAM TITLE.
2914 014734 016545 P4TIT
2915 014736 004537 004132 JSR 5,LINSLX ;GO GET LINE # FROM USER
2916 014742 004737 004322 JSR %7,INBIN ;INITIALIZE BINARY COUNT.
2917 014746 004737 004426 PRG4A: JSR %7,GTBINP ;GET BINARY CHARACTER.
2918 014752 110137 001560 MOVB %1,CBUBFA ;SAVE AT CBUBFA.
2919 014756 004737 014764 JSR %7,MOUTIN ;GO OUTPUT, RECEIVE, AND CHECK DATA.
2920 014762 000771 BR PRG4A ;REPEAT.
2921 ;SUBROUTINE TO OUTPUT, RECEIVE, AND CHECK DATA WITH MAINTENANCE BIT SET.
2922 014764 032777 000200 163202 MOUTIN: BIT #BIT7,@SRPTR ;SEE IF BIT 7 IS SET.
2923 014772 001001 BNE .+4 ;BRANCH IF SET.
2924 014774 104002 STALL ;SET. DO A RANDOM STALL.
2925 014776 104020 TIMETX ;TIME OUT TX DONE
2926 015000 104003 ERROR ;ERROR DONE NOT SETTING
2927 015002 052777 000004 164404 BIS #BIT2,@TXCSR ;SET MAINTENANCE BIT.
2928 015010 005777 164376 TST @RXBUF ;CLR RX DONE
2929 015014 013777 001560 164374 MOV CBUBFA,@TXBUF ;LOAD TXBUF.
2930 015022 004737 005374 JSR 7,MASKIT ;MASK OFF NON TRANSMITTED BITS
2931 015026 104017 TIMERX ;TIME OUT RX DONE
2932 015030 104003 ERROR ;ERROR DONE NOT SETTING
2933 015032 017737 164354 001556 MOV @RXBUF,CBUBF ;MOVE CHAR IN RX BUFFER TO CBUBF.
2934 015040 104004 DATCHK ;COMPARE EXPECTED AND RECEIVED DATA
2935 015042 000207 RTS %7 ;EXIT.
```

```
2936
2937
2938 ;ASCII MESSAGES
2939 015044 042045 030514 026461 MTIT: .ASCII '%DL11-E,C/D OFLNE TST - CZDLA-G%'
2940 015052 026105 027503 020104
2941 015060 043117 047114 020105
2942 015066 051524 020124 020055
2943 015074 055103 046104 026501
2944 015102 022507
2945 015104 046445 050101 047440 .ASCII '%MAP OF DEVICES PRESENT%'
2946 015112 020106 042504 044526
2947 015120 042503 020123 051120
2948 015126 051505 047105 022524
2949 015134 100
2950 015135 040 020040 020040 MDEVAD: .ASCII ' %a'
2951 015142 020040 020040 020040
2952 015150 020040 022440 100
2953 015155 045 054524 042520 PGMSG: .ASCII '%TYPE IN PROGRAM NUMBER a'
2954 015162 044440 020116 051120
2955 015170 043517 040522 020115
2956 015176 052516 041115 051105
2957 015204 020040 020040 100
2958 015211 045 047516 042516 MNONE: .ASCII '%NONE FOUND%'
2959 015216 043040 052517 042116
2960 015224 040045
2961 015226 052045
2962 015230 020040 020040 041520 EMO: .ASCII '%T'
2963 015236 020075 ATNUMB: .ASCII ' PC= '
2964 015240 020040 020040 020040 APC: .ASCII ' RXCSR= '
2965 015246 020040 054122 051503
2966 015254 036522 040
2967 015257 040 020040 020040 MRXNUM: .ASCII ' a'
2968 015264 020040 040040
2969 015270 022445 051120 030107 POTIT: .ASCII '%PRGO - INPUT-OUTPUT LOGIC TESTS. '
2970 015276 026440 044440 050116
2971 015304 052125 047455 052125
2972 015312 052520 020124 047514
2973 015320 044507 020103 042524
2974 015326 052123 027123 040
2975 015333 045 044504 041523 .ASCII '%DISCONNECT DL11-E FROM MODEM'
2976 015340 047117 042516 052103
2977 015346 042040 030514 026461
2978 015354 020105 051106 046517
2979 015362 046440 042117 046505
2980 015370 040440 042116 041440 .ASCII ' AND CONNECT JUMPER TO CABLE.%a'
2981 015376 047117 042516 052103
2982 015404 045040 046525 042520
2983 015412 020122 047524 041440
2984 015420 041101 042514 022456
2985 015426 100
2986 015427 124 041530 051123 ATXCSR: .ASCII 'TXCSR S/B: '
2987 015434 051440 041057 020072
2988 015442 020040 020040 020040 ATXSB: .ASCII ' WAS: '
2989 015450 020040 040527 035123
2990 015456 040
2991 015457 040 020040 020040 ATXWAS: .ASCII ' a'
```

```
2992 015464 040040
2993 015466 054122 051503 020122 ARXCSR: .ASCII 'RXCSR S/B: '
2994 015474 02523 035102 040
2995 015501 040 020040 020040 ARXSB: .ASCII ' WAS: '
2996 015506 020040 053440 051501
2997 015514 020072
2998 015516 020040 020040 020040 ARXWAS: .ASCII ' a'
2999 015524 040040
3000 015526 054124 051440 042520 ETXTIM: .ASCII 'TX SPEEDS NOT IN ASCENDING ORDER.a'
3001 015534 042105 020123 047516
3002 015542 020124 047111 040440
3003 015550 041523 047105 044504
3004 015556 043516 047440 042122
3005 015564 051105 040056
3006 015570 054122 051440 042520 ERXTIM: .ASCII 'RX SPEEDS NOT IN ASCENDING ORDER.a'
3007 015576 042105 020123 047516
3008 015604 020124 047111 040440
3009 015612 041523 047105 044504
3010 015620 043516 047440 042122
3011 015626 051105 040056
3012 015632 022445 051120 030507 P1TIT: .ASCII '%XPRG1 - TRANSMITTER SCOPE LOOPa'
3013 015640 026440 052040 040522
3014 015646 051516 044515 052124
3015 015654 051105 051440 047503
3016 015662 042520 046040 047517
3017 015670 040120
3018 015672 022445 051120 031107 P2TIT: .ASCII '%XPRG2 - RECEIVER SCOPE LOOPa'
3019 015700 026440 051040 041505
3020 015706 044505 042526 020122
3021 015714 041523 050117 020105
3022 015722 047514 050117 100
3023 015727 045 054524 042520 SELCAD: .ASCII '%XTYPE TEST CHAR. CODE IN BITS 15-8,TYPE DELAY TIME IN BITS 7-0'
3024 015734 052040 051505 020124
3025 015742 044103 051101 020056
3026 015750 047503 042504 044440
3027 015756 020116 044502 051524
3028 015764 030440 026465 026070
3029 015772 054524 042520 042040
3030 016000 046105 054501 052040
3031 016006 046511 020105 047111
3032 016014 041040 052111 020123
3033 016022 026467 060
3034 016025 045 043117 040440 .ASCII '%OF AN OCTAL WORD.%a'
3035 016032 020116 041517 040524
3036 016040 020114 047527 042122
3037 016046 022456 100
3038 016051 104 052101 020101 ERDAT: .ASCII 'DATA S/B: '
3039 016056 027523 035102 040
3040 016063 040 020040 053440 AASB: .ASCII ' WAS: '
3041 016070 051501 020072
3042 016074 020040 040 AWAS: .ASCII ' '
3043 016077 040 054122 052502 .ASCII ' RXBUF: '
3044 016104 035106 040
3045 016107 040 020040 020040 ARXBU: .ASCII ' a'
3046 016114 020040 100
3047 016117 045 042523 020124 ASETSR: .ASCII '%SET DESIRED SR OPTIONS. NORMAL OPERATION '
```

3048	016124	042504	044523	042522	
3049	016132	020104	051123	047440	
3050	016140	052120	047511	051516	
3051	016146	020056	047516	046522	
3052	016154	046101	047440	042520	
3053	016162	040522	044524	047117	
3054	016170	040			
3055	016171	111	020123	044527	.ASCII 'IS WITH SR = 000000@a'
3056	016176	044124	051440	020122	
3057	016204	020075	030060	030060	
3058	016212	030060	040045		
3059	016216	044445	041516	051117	AINCRT: .ASCII '%INCORRECT ROUTINE SELECTED, PLACE CORRECT PROGRAM'
3060	016224	042522	052103	051040	
3061	016232	052517	044524	042516	
3062	016240	051440	046105	041505	
3063	016246	042524	026104	050040	
3064	016254	040514	042503	041440	
3065	016262	051117	042522	052103	
3066	016270	050040	047522	051107	
3067	016276	046501			
3068	016300	044445	020116	051117	.ASCII '%IN SR 0-2 AND PRESS CONTINUE.a'
3069	016306	030040	031055	0404	
3070	016314	042116	050040	042522	
3071	016322	051523	041440	047117	
3072	016330	044524	052516	027105	
3073	016336	100			
3074	016337	045	047111	040526	AINCPG: .ASCII '%INVALID PROGRAM SELECTED.a'
3075	016344	044514	020104	051120	
3076	016352	043517	040522	020115	
3077	016360	042523	042514	052103	
3078	016366	042105	040056		
3079	016372	207			APGEND: .BYTE 207
3080	016373	045	047105	020104	.ASCII '%END PASS = '
3081	016400	040520	051523	036440	
3082	016406	040			
3083	016407	040	020040	020040	APCNT: .ASCII ' LINE = '
3084	016414	020040	046040	047111	
3085	016422	020105	020075	040	
3086	016427	040	020040	051040	ACLIN: .ASCII ' RXCSR = '
3087	016434	041530	051123	036440	
3088	016442	040			
3089	016443	040	020040	020040	APRXC: .ASCII ' VECTOR = '
3090	016450	020040	053040	041505	
3091	016456	047524	020122	020075	
3092	016464	020040	020040	020040	APVEC: .ASCII ' a'
3093	016472	020040	100		
3094	016475	045	050045	043522	P3TIT: .ASCII '%PRG3-SINGLE CHAR MAINT MODE DATA TEST@a'
3095	016502	026463	044523	043516	
3096	016510	042514	041440	040510	
3097	016516	020122	040515	047111	
3098	016524	020124	047515	042504	
3099	016532	042040	052101	020101	
3100	016540	042524	052123	100	
3101	016545	045	050045	043522	P4TIT: .ASCII '%PRG4-SPEC BIN COUNT MAINT MODE DATA TEST@a'
3102	016552	026464	050123	041505	
3103	016560	041040	047111	041440	

3104	016566	^52517	052116	046440	
3105	016574	^4501	052116	046440	
3106	016602	042117	020105	040504	
3107	016610	040524	052040	051505	
3108	016616	040124			
3109	016620	052045	050131	020105	SELCAR: .ASCII '%TYPE IN TEST CHAR. CODE. %a'
3110	016626	047111	052040	051505	
3111	016634	020124	044103	051101	
3112	016642	020056	047503	042504	
3113	016650	020056	020040	022440	
3114	016656	100			
3115	016657	045	054524	042520	LDLINE: .ASCII '%TYPE IN LINE NO. a'
3116	016664	044440	020116	044514	
3117	016672	042516	047040	027117	
3118	016700	020040	020040	100	
3119	016705	045	044514	042516	ALINE: .ASCII '%LINE NO.'
3120	016712	047040	027117		
3121	016716	020040	053440	051501	SELINE: .ASCII ' WAS SELECTEDa'
3122	016724	051440	046105	041505	
3123	016732	042524	040104		
3124	016736	051045	041505	044505	MSETRX: .ASCII '%RECEIVER SPEED CHECKa'
3125	016744	042526	020122	050123	
3126	016752	042505	020104	044103	
3127	016760	041505	040113		
3128	016764	052045	040522	051516	MSETTX: .ASCII '%TRANSMIT SPEED CHECKa'
3129	016772	044515	020124	050123	
3130	017000	042505	020104	044103	
3131	017006	041505	040113		
3132	017012	051445	052105	041440	MSETC: .ASCII '%SET CLOCK SWITCHES TO POSITION, THEN PRESS CONTINUE.a'
3133	017020	047514	045503	051440	
3134	017026	044527	041524	042510	
3135	017034	020123	047524	050040	
3136	017042	051517	052111	047511	
3137	017050	026116	052040	042510	
3138	017056	020116	051120	051505	
3139	017064	020123	047503	052116	
3140	017072	047111	042525	040056	
3141	017100	042445	051122	051117	MTERR: .ASCII '%ERROR - UNEXPECTED TRAP'
3142	017106	026440	052440	042516	
3143	017114	050130	041505	042524	
3144	017122	020104	051124	050101	
3145	017130	052045	040522	050120	.ASCII '%TRAPPED TO '
3146	017136	042105	052040	020117	
3147	017144	040			
3148	017145	040	020040	020040	MTO: .ASCII ' '
3149	017152	020040	040		
3150	017155	045	051124	050101	.ASCII '%TRAPPED FROM PC '
3151	017162	042520	020104	051106	
3152	017170	046517	050040	020103	
3153	017176	040			
3154	017177	040	020040	020040	MFROM: .ASCII ' a'
3155	017204	020040	040040		
3156	017210	047045	020117	042504	MNOLIN: .ASCII '%NO DEVICE PRESENT - THIS LINE NO.a'
3157	017216	044526	042503	050040	
3158	017224	042522	042523	052116	
3159	017232	026440	052040	044510	

```
3160 017240 020123 044514 042516
3161 017246 047040 027117 100
3162 017253 077 040045 DTERR: .ASCII '?%a'
3163 017256 047045 020117 047111 INTER: .ASCII '%NO INTERRUPTa'
3164 017264 042524 051122 050125
3165 017272 040124
3166 017274 041445 020123 020075 MS0: .ASCII '%CS = 0a'
3167 017302 040060
3168 017304 041445 020123 020075 MS1: .ASCII '%CS = 1a'
3169 017312 040061
3170 017314 041445 020123 020075 MS2: .ASCII '%CS = 2a'
3171 017322 040062
3172 017324 041445 020123 020075 MS3: .ASCII '%CS = 3a'
3173 017332 040063
3174 017334 041445 020123 020075 MS4: .ASCII '%CS = 4a'
3175 017342 040064
3176 017344 041445 020123 020075 MS5: .ASCII '%CS = 5a'
3177 017352 040065
3178 017354 041445 020123 020075 MS6: .ASCII '%CS = 6a'
3179 017362 040066
3180 017364 041445 020123 020075 MS7: .ASCII '%CS = 7a'
3181 017372 040067
3182 017374 051045 041505 053117 MPWRF: .ASCII '%RECOVERED FROM POWER FAILUREa'
3183 017402 051105 042105 043040
3184 017410 047522 020115 047520
3185 017416 042527 020122 040506
3186 017424 046111 051125 040105
3187 .EVEN
3188 000001 .END
```

[illegible]

AINCPG	016337	1246	3074#							
AINCRT	016216	1242	3059#							
AJA	007072	1621	1625#							
AJB	007114	1627	1630#							
AJBA	010336	1937	1942#							
AJBB	010364	1945	1948#							
AJBC	010412	1951	1954#							
AJBD	010436	1947	1953	1957	1959#					
AJC	007136	1632	1635#							
AJD	007156	1629	1634	1637	1639#					
AKA	007200	1648	1653#							
AKB	007212	1654	1657#							
AKBA	010450	1966	1971#							
AKBC	010506	1976	1978#							
ALA	007224	1664	1668#							
ALAA	012006	2252	2259#							
ALAB	012036	2264	2267#							
ALAC	012050	2266	2269	2271#						
ALBA	010656	2018	2023#							
ALBB	010704	2026	2029#							
ALBC	010732	2032	2035#							
ALBD	010756	2028	2034	2038	2040#					
ALINE	016705	1112	3119#							
ALY	007254	1671	1674#							
ALZ	007274	1673	1676	1678#						
AMAA	012062	2278	2283#							
AMAC	012114	2289	2291#							
AMBA	010770	2047	2051#							
AMBB	011030	2056	2059#							
AMBC	011044	2060	2063#							
AMBD	011072	2066	2069#							
AMBE	011116	2058	2062	2068	2072	2074#				
AOAA	012132	2298	2304#							
AOAB	012150	2307#	2311							
AOAB1	012164	2308	2310#							
AOAC	012206	2313	2316#							
OAD	012220	2315	2317	2319#						
AOBA	010544	1990	1994#							
AOBB	010572	1997	2000#							
AOBC	010620	2003	2006#							
AOBD	010644	1999	2005	2009	2011#					
APA	007306	1685	1689#							
APB	007322	1690	1693#							
APBA	014022	2715	2721#							
APBB	014030	2722#	2733							
APC	015240	1353	2964#							
APCNT	016407	1254	3083#							
APCX	007344	1695	1698#							
APD	007364	1692	1697	1700	1702#					
APGEND	016372	1269	3079#							
APRXC	016443	1262	3089#							
APVEC	016464	1266	3092#							
AQA	007406	1711	1715#							
AQAA	012236	2327	2335#							
AQAB	012462	2380	2383#							
AQAS	012464	2342	2347	2352	2357	2362	2367	2372	2377	2385#

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 65
 CZDLA.G.P11 30-MAR-78 08:51 CROSS REFERENCE TABLE -- USER SYMBOLS

CZDLAG.P11 30-MAR-78 08:51

CROSS REFERENCE TABLE -- USER SYMBOLS

[illegible]

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 66
 CZDLA.G.P11 30-MAR-78 08:51 CROSS REFERENCE TABLE -- USER SYMBOLS

AT35	011776	2171	2249#	
AT36	012052	2250	2275#	
AT37	012116	2276	2295#	
AT4	006662	1550	1565#	
AT40	012226	2296	2324#	
AT41	012530	2325	2399#	
AT42	012674	2400	2439#	
AT43	012762	2440	2463#	
AT44	013040	2464	2485#	
AT45	013124	2486	2508#	
AT46	013222	2509	2536#	
AT47	013306	2537	2560#	
AT5	006762	1566	1592#	
AT50	013370	2561	2584#	
AT51	013452	2585	2607#	
AT52	013542	2608	2631#	
AT53	013640	2632	2659#	
AT54	013700	2660	2676#	
AT55	013764	2677	2699#	
AT56	014006	2700	2712#	
AT57	014100	2713	2738#	
AT6	007062	1593	1618#	
AT60	014164	2739	2763#	
AT61	014234	2764	2784#	
AT62	014270	2785	2799#	
AT63	014324	2800	2813#	
AT7	007170	1619	1645#	
AUAA	012776	2466	2473#	
AUAB	013022	2477#	2481	
AUAC	013032	2472	2479#	
AVAA	013054	2488	2495#	
AVAB	013112	2494	2502#	
AVAC	013114	2501	2503#	
AWAA	013134	2511	2516#	
AWAB	013164	2523#	2529	2532
AWAC	013174	2517	2525#	
AWAD	013210	2526	2528#	
AWAE	013214	2525	2530#	
AWAS	016074	1322	3042#	
AXA	007750	1806	1810#	
AXAA	013246	2539	2548#	
AXAB	013274	2546	2554#	
AXAL	013276	2553	2555#	
AXB	007764	1811	1814#	
AX1A	013326	2563	2571#	
AX1B	013356	2570	2578#	
AX1C	013360	2577	2579#	
AYA	007776	182*	1825#	
AYAA	013410	2587	2595#	
AYAB	013434	2599#	2603	
AYAC	013444	2593	2601#	
AYB	010012	1826	1829#	
AZA	010024	1836	1840#	
AZAA	013472	2610	2618#	
AZAB	013530	2616	2625#	
AZAC	013532	2624	2626#	

CROSS REFERENCE TABLE -- USER SYMBOLS

AZB	010040	1841	1844#														
BDCNV	004604	1181#	1252														
BDCNVA	004636	1188#	1191														
BDCNVB	004670	1193*	1195#														
BDCNVC	004672	1184*	1196#														
BDCNVD	004674	1185*	1192	1197#													
BIT0 =	000001	449#	718	723	739	1091	1098	1294	1451	1573	1577	1578	1582	1583			
BIT1 =	000002	1586	2823														
		448#	1219	1668	1669	1670	1674	1675	1877	1883	1900	1907	1921	1942			
		1948	1954	2115	2139												
BIT10 =	002000	439#	811	1810	2025	2031	2037										
BIT11 =	004000	438#	806	1825	2307	2316											
BIT12 =	010000	437#	1076	1270	1291	1879	1885										
BIT13 =	020000	436#	1250	1345	1458	1944	1950	1956									
BIT14 =	040000	435#	796	1840	1975	1980	2409	2417	2427								
BIT15 =	100000	433	434#	814	1350	1855	1903	1912	1916	1926	1996	2002	2008	2055			
		2059	2065	2071	2423												
BIT2 =	000004	447#	831	1220	1599	1603	1604	1608	1609	1612	1689	1693	1694	1698			
		1699	1702	1971	1973	1978	1994	2000	2006	2259	2283	2304	2431	2822			
		2834	2883	2927													
BIT3 =	000010	446#	1715	1719	1720	1724	1725	1728	2023	2029	2035	2051	2053	2063			
		2069															
BIT4 =	000020	445#															
BIT5 =	000040	444#	1742	1746	1747	1751	1752	1755	2579								
BIT6 =	000100	443#	1099	1100	1105	1452	1453	1464	1626	1630	1631	1635	1636	1639			
		1769	1773	1774	1778	1779	1782	2450	2452	2455	2457	2474	2475	2477			
		2495	2498	2503	2518	2520	2523	2548	2550	2555	2595	2597	2599	2618			
		2621	2626	2642	2643	2646	2687	2689	2694								
BIT7 =	000200	442#	1795	2088	2091	2162	2922										
BIT8 =	000400	441#															
BIT9 =	001000	440#	778	816	1430												
BMOVA	004572	1174#	1176														
BMOVE	004562	1117	1170#	1194													
CD =	100000	478#	1497	1513	1531	1547	1563	1590	1616	1643	1759	1816	1831	1846			
		2076	2142	2168	2273	2293	2397	2437	2461	2483	2506	2534	2582	2605			
		2629	2657	2674	2697	2811											
CDINIT	002706	829#	2303	2706	2821												
CDINX	002732	830	835#														
CHAINN	002540	619	796#														
CHALT =	104005	465#															
CHNA	002556	797	800#														
CHNAA	002624	807	810#														
CHNAB	002550	798#	809	825													
CHNB	002650	785	812	816#													
CLRCD	J03300	706	928#	1081													
CMAS0	001302	536#	1418														
CMAS1	001304	537#															
CMAS10	001322	544#															
CMAS11	001324	545#															
CMAS12	001326	546#															
CMAS13	001330	547#															
CMAS14	001332	548#															
CMAS15	001334	549#															
CMAS16	001336	550#															
CMAS17	001340	551#															
CMAS2	001306	538#															

CMAS20	001342	552#								
CMAS21	001344	553#								
CMAS22	001346	554#								
CMAS23	001350	555#								
CMAS24	001352	556#								
CMAS25	001354	557#								
CMAS26	001356	558#								
CMAS27	001360	559#								
CMAS3	001310	539#								
CMAS30	001362	560#								
CMAS31	001364	561#								
CMAS32	001366	562#								
CMAS33	001370	563#								
CMAS34	001372	564#								
CMAS35	001374	565#								
CMAS36	001376	566#								
CMAS37	001400	567#								
CMAS4	001312	540#								
CMAS5	001314	541#								
CMAS6	001316	542#								
CMAS7	001320	543#								
CMPT	014424	2222	2379	2840#						
CMPTNG	014514	2841	2843	2845	2847	2849	2851	2854#		
CMPTOK	014520	2853	2855#							
CNVCTR	004742	1187*	1190*	1209#						
CONT	005322	1285	1291#							
COUNT	001624	646#	991*	1007*	1008					
LRBUF	001556	627#	1230*	1318	1321	2730*	2933*			
CRBUFA	001560	628#	1225*	1311*	1318	1325	2725*	2907*	2918*	2929
CRBUFB	001562	629#	1315*	1316	1329					
CTRO	001564	630#	1221*	1232*	2186*	2343*	2721*	2732*	2840	
CTR1	001566	631#	2191*	2348*	2840	2842				
CTR2	001570	632#	2196*	2353*	2842	2844				
CTR3	001572	633#	2201*	2358*	2844	2846				
CTR4	001574	634#	2206*	2363*	2846	2848				
CTR5	001576	635#	2211*	2368*	2848	2850				
CTR6	001600	636#	2216*	2373*	2850	2852				
CTR7	001602	637#	2221*	2378*	2852					
CURTST	001454	593#	784	790	843*					
DATAA	005012	1222#	1233							
DATCHK=	104004	464#	1231	2731	2934					
DATTST	004770	1219#	2707							
DECVAL	004762	1182	1217#							
DELAY =	104016	474#	832	1048	2261	2433	2574	2870	2887	
DIGIT	004744	1200*	1203*	1206*	1207	1210#				
DLCNT	003772	1027*	1029	1040#						
DLY	003726	623	1027#							
DLYA	003750	1032#	1037							
DLYB	003754	1033#	1034							
DLYC	003766	1030	1038#							
DOTHIS	006216	1430#	2178	2335						
DTCHK	005424	613	1315#							
DTCHKA	005514	1319	1334#							
DTCHKX	005452	1317	1320#							
DTERR	017253	1017	3162#							
ECDAT	003606	996#	997							

[illegible]

[illegible]

.MAIN. MACY11 30A(1052) 30-MAR-78 08:52 PAGE 72

SEQ 0071

CZDLA.G.P11 30-MAR-78 08:51

CROSS REFERENCE TABLE -- USER SYMBOLS

RP1	003274	911	915*	922	924#									
RP2	003276	914	918	921*	925#									
RREAD	003702	1002	1004	1006	1009	1016#								
RSTART	006426	1472	1474#											
RSTPC	003114	872*	880	882#										
RSTPSW	003116	873*	879	883#										
RSTREG=	104014	472#	1165	1177	1198									
RSTRG	003060	621	872#											
RTNNO	001456	574#	760*	782	788	813	839*	1349	1360					
RXBUF	001412	574#	834	931*	1230	1315	1411*	1525	2287	2319	2388	2408	2417	2423
		2421	2671	2730	2827	2889	2928	2933						
RXBUF1	001610	640#	2408*	2409	2413									
RXCRO	001200	495#	715	738	742	1090	1278							
RXCR1	001202	496#												
RXCR10	001220	503#												
RXCR11	001222	504#												
RXCR12	001224	505#												
RXCR13	001226	506#												
RXCR14	001230	507#												
RXCR15	001232	508#												
RXCR16	001234	509#												
RXCR17	001236	510#												
RXCR2	001204	497#												
RXCR20	001240	511#												
RXCR21	001242	512#												
RXCR22	001244	513#												
RXCR23	001246	514#												
RXCR24	001250	515#												
RXCR25	001252	516#												
RXCR26	001254	517#												
RXCR27	001256	518#												
RXCR3	001206	498#												
RXCR30	001260	519#												
RXCR31	001262	520#												
RXCR32	001264	521#												
RXCR33	001266	522#												
RXCR34	001270	523#												
RXCR35	001272	524#												
RXCR36	001274	525#												
RXCR	001210	499#												
RXCR5	001212	500#												
RXCR6	001214	501#												
RXCR7	001216	502#												
RXCSR	001410	573#	930*	1062	1219*	1228	1261	1356	1409*	1507*	1668*	1669*	1670	1674*
		1675	1689	1693*	1694	1698*	1699	1702*	1715	1719*	1720	1724*	1725	1728*
		1742	1746*	1747	1751*	1752	1755*	1769	1773*	1774	1778*	1779	1782*	1795
		1810	1825	1840	1855	1877*	1879	1883*	1885	1900*	1902	1903	1907*	1911
		1916	1921*	1925	1942*	1944	1948*	1950	1954*	1956	1971*	1973*	1975	1978*
		1980	1994*	1996	2000*	2002	2006*	2008	2023*	2025	2029*	2031	2035*	2037
		2051*	2053*	2055	2059	2063*	2065	2069*	2071	2115*	2116*	2125	2139*	2263
		2268	2288	2307	2310	2316	2392	2548*	2550*	2555*	2571*	2573*	2579*	2595*
		2597*	2599*	2618*	2621*	2626*	2642*	2643*	2646*	2667	2668	2687*	2689*	2694*
		2748*	2754	2773*	2774	2792*	2793							
RXCSRT	001606	639#	1902*	1911*	1912	1925*	1926	2125*	2126	2134	2667*			
RXEND	001300	527#	716	748										
RXLVL	001422	578#	891	934*	1424*	2596	2619							

RXVTR	001420	577#	889	932*	1103	1265	1404*	1449*	1456	2648*				
SAVREG=	104013	471#	1150	1170	1181									
SAVRG	003020	620	857#											
SCOPE =	104012	470#	1235	1508	1526	1542	1558	1588	1614	1641	1657	1678	1704	1730
		1757	1784	1799	1814	1829	1844	1859	1888	1930	1959	1983	2011	2040
		2074	2102	2140	2166	2226	2271	2291	2320	2383	2412	2416	2421	2426
		2430	2456	2478	2504	2524	2556	2580	2600	2627	2647	2672	2695	2708
		2734	2759	2780	2795	2810	2831							
SCOPTR	001466	598#	798	842*										
SELCAD	015727	2864	2880	3023#										
SELCAR	016620	2904	3109#											
SELINE	016716	1109	3121#											
SETSR	005070	1237#	1492											
SIOT	004112	1062*	1064*	1068	1073#									
SOFTSR	000176	483#	659											
SPBOT =	001176	430#	652	702	774	1439								
SRESET=	104011	469#	775	1587	1613	1640	1656	1703	1729	1756	1783	1798	1813	1828
		1843	1858	2087	2124	2165	2267	2830						
SRPTR	000174	482#	656	659*	778	786	796	806	811	816	1076	1250	1270	1291
		1302	1345	1430	1458	2922								
SRSETT	003210	618	904#	906*										
STAL	003774	611	1044#											
STALA	004014	1047*	1049#											
STALB	004016	1046	1050#											
STALL -	104002	462#	2924											
START	002044	673	686	702#	757	1248	1393							
STARTZ	001640	485	652#											
START1	002234	709	738#											
START2	002240	739#	749											
START3	002274	740	747#											
START4	002334	746	758#											
STLMSK	001406	571#	1045											
STLSPV	003154	616	895#											
STLSRV	003120	615	886#											
STPPA	003176	896*	899#											
STPRA	003142	887*	590#											
STRXD	014404	2547	2594	2617	2639	2666	2685	2686	2772	2834#				
STRXV =	104006	466#	2545	2569	2592	2615	2640	2683						
STTXV =	104007	467#	2448	2471	2493	2516								
SUBTEN	004702	1189	1200#											
SUBTNA	004706	1201#	1204											
SUBTNB	004722	1202	1205#											
SVRPC	003054	857*	865	867#										
SVRPSW	003056	858*	864	868#										
TEMP	001616	643#	1085*	1086*	1087	1088*	1089	1274*	1275*	1276*	1277	1283*	1296*	1297
		1416*	1417*	1418*	1419	2091*	2093	2128*	2130	2306*	2309*	2312		
TEMP1	001620	644#	726*	728	1419*	1420	1421*	1422*	1423*	1424	1425			
TEMP2	001622	645#	2866*	2867	2868	2882*	2884	2885	2906*	2907				
TENPWR	004746	1188*	1201	1205	1211#									
TIME	011762	1878	1884	1901	1910	1924	1943	1949	1955	1972	1974	1979	1995	2001
		2007	2024	2030	2036	2052	2054	2064	2070	2235	2241#	2390		
TIMER	004110	1065*	1066*	1072#										
TIMERX=	104017	475#	2122	2285	2728	2825	2836	2931						
TIMETX=	104020	476#	2119	2153	2160	2722	2925							
TIMEX	004106	1067	1071#											
TIME1	004062	1063	1065#											

[illegible]

XORFLG 002016	670*	680#	685*	800	1523	2790	2805							
= 017432	401#	418	420#	426	481#	484#	486#	488#	679#	753	954	1133	1142	
	1223	1229	1981	2163	2230	2233	2387	2410	2414	2419	2424	2428	2828	
	2923													

. ABS. 017432 000

ERRORS DETECTED: 0

CZDLAG,CZDLAG=CZDLAG.P11

RUN-TIME: 3 7 1 SECONDS

RUN-TIME RATIO: 49/13-3.6

CORE USED: 11K (21 PAGES)

DOCUMENT PAGES: 74